


# **Ball rail systems**

ball runner blocks, ball guide rails, accessories



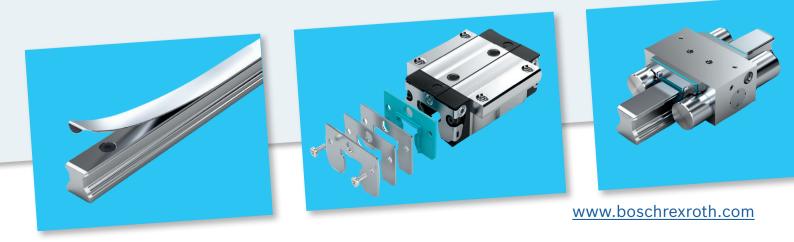

4 High-speed ball runner block BSHP made of steel 84
4 Product description 84
6 FNS, FLS, SNS, SLS 85
8
ling to DIN 637 10 Super ball runner block made of steel 86
cks with load ratings Product description 86
12 FKS 88
with rail lengths 16 SKS 90
ations 18
26 Aluminum ball runner block BSHP 92
30 Product description 92
33 FNS 94
35 SNS 96
35
36 Ball runner block BSHP Resist NR 98
Product description 98
ion Ball Runner Block FNS, FLS, FKS, SNS, SLS, SKS 99
38
38 Ball runner block BSHP Resist NR II 100
39 Product description 100
45 FNS, FLS, FKS, SNS, SLS, SKS 102
P made of steel 46 Ball runner block BSHP Resist CR 104
46 Product description 104
47 FNS, FLS, SNS, SLS, SNH, SLH, FNN, FKN,
height 48 SNN, SKN, FKS, SKS 106
ight 50
ght 52 <b>Standard ball guide rails made of steel 108</b>
height 54 Product description 108
ight 56 Ordering guide rails in the recommended rail lengths 109
eight 58 SNS/SNO with cover strip and strip clamps 110
60 SNS/SNO with cover strip and protective caps 112
62 SNS/SNO with plastic mounting hole plugs 114
64 SNS with mounting hole plugs made of steel 116
66 SNS for mounting from below 118
68
70 Standard ball guide rails Resist NR II 120
Product description 120
HP made of steel 72
72 Standard ball guide rails Resist CR 122
74 Product description 122
76
78 Standard ball guide rails with temperature control 124
·
76

Wide ball rail systems BSHP made of steel	
and Resist CR	126
Product description	126
BNS - wide, normal, standard height	128
CNS - compact, normal, standard height	132
Product description	134
Ordering guide rails in the recommended rail lengths	135
Accessories for ball runner blocks	140
Product description	140
Front seal	142
FKM seal	143
Seal kit	144
Lubrication adapter	145
Lubrication plate	146
Lubrication plate G 1/8	147
Transport lock	148
Front lube units	150
Bellows	154
Lube nipple, lube fittings, extensions	158
Accessories for ball guide rails	162
Product description	162
Cover strip	163
Mounting hole plugs	167
Mounting runner block	168
V-guide	170
Cardboard box opener	171
Clamping and braking units	172
Product description hydraulic clamping	
and braking units	172
Hydraulic clamping and braking units, KBH, FLS	174
Hydraulic clamping and braking units, KBH, SLS	175
Hydraulic clamping units product description	176
Technical data and calculations	177
Hydraulic clamping units KWH, SLH	180
Pneumatic clamping and braking units,	
product description	182
Pneumatic clamping and braking units MBPS	184
Pneumatic clamping and braking units UBPS	186
Product description pneumatic clamping units	188
Pneumatic clamping units MK	190
Pneumatic clamping units MKS	192

Pneumatic clamping units LCP	194
Pneumatic clamping units LCPS	196
Manual clamping units, product description	198
Manual clamping units HK	199
Spacer plate	201
Safety instructions clamping and braking units	202
Instructions for mounting	204
General instruction for mounting	204
Fastener	205
Installation tolerances	215
Composite ball guide rails	218
Lubrication	220
Notes on lubrication	220
Lubrication	222
Maintenance	236
Further information	237

# New features at a glance

### Runner block and guide rail configurator


With the new configurators, Bosch Rexroth accelerates the selection and configuration of ball runner blocks and ball guide rails. A built-in plausibility check monitors each decision in real time to ensure that the individual configuration can be implemented. Then the selected components can be ordered directly from the Bosch Rexroth eShop.

### Link to the runner block configurator






### Link to the ball guide rail configurator

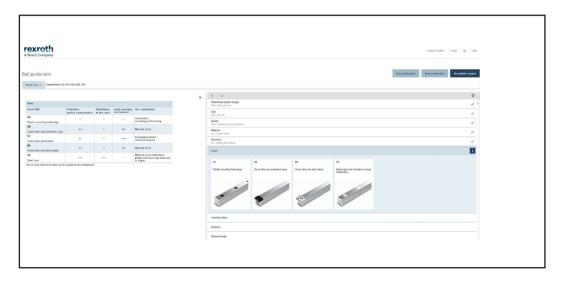



### Temperature-controlled rail

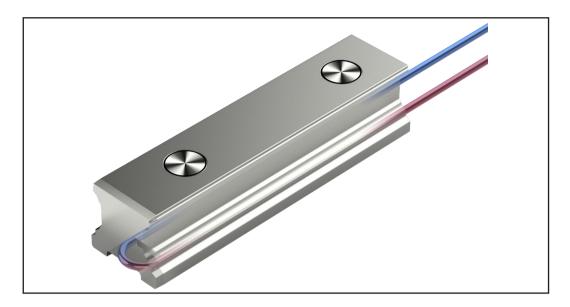

### Extension of relubrication intervals for grease lubrication

The latest investigations in the Bosch Rexroth testing prove that under certain operating conditions, significantly longer relubrication intervals are possible with grease lubrication. If small loads, normal ambient temperatures and medium to high travel speeds are present, up to 20,000 km can be realized without relubrication in ball rail systems. This enormous increase has been made possible by continuous improvements in the manufacturing processes for runner blocks and guide rails, which have resulted in better surfaces and higher geometrical dimensional accuracy of the running tracks.

### **Mounting runner block**

Mounting runner block for high-precision parallel alignment and joint alignment of multi-piece ball guide rails.



# Product description

### **Characteristic features**

### Complete guide units can also be designed by combining interchangeable elements from stock...

Rexroth manufactures ball guide rails and ball runner blocks especially for the ball raceway sector with such high precision that each individual component element is fully interchangeable. As a result, any combination is possible within each accuracy class. This enables globally unique, premium logistics. Each element can be individually planned and separately stocked. On ball guide rails, both sides can be used as reference edges.

### **Highlights**

- ▶ The same high load ratings in all four main directions of loading
- ▶ Minimal noise level and optimum travel behavior
- ► Excellent dynamic characteristics:

Travel speed:  $v_{max}$  up to 10 m/s Acceleration:  $a_{max} = 500 \text{ m/s}^2$ 

- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication¹)
- ► Lube fittings with metal threads on all sides¹)
- ▶ Limitless interchangeability as all ball guide rail versions can be combined at will with all ball runner block versions
- ► Maximum system rigidity due to preloaded O-arrangement
- ▶ Maximum installation error compensation with super ball runner blocks
- ▶ 60% less gravity with aluminum all runner blocks (compared to ball runner blocks made of steel)

### **Further highlights**

- ► Interchangeability with roller rail system
- ▶ Optional integrated, inductive and wear-free measuring system
- ► Wide range of accessories
- ▶ Attachments on the ball runner block can be mounted from above and below¹)
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block¹)
- ▶ End-face fastening thread for all attachments
- ▶ High rigidity in all load directions permits applications with just one runner block per rail
- ► Integrated all-round sealing
- ► High torque load capacity
- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ► Different preload classes

### Corrosion protection (optional)1)

- Resist NR: Ball runner block body made of corrosion resistant steel as per DIN EN 10088
- ► Resist NR II: Ball runner block body and ball guide rail as well as all steel parts made of corrosion resistant steel in accordance with DIN EN 10088
- ► Resist CR: Ball runner block body or ball guide rail made of steel with corrosion resistant coating, matte-silver finish, hard chrome plated

### Ball chain (optional)

► Optimized noise level



### Proven cover strip for the ball guide rail mounting holes

- ▶ One cover for all bore holes saves time and costs
- ▶ Made of corrosion resistant spring steel DIN EN 10088
- ► Easy and safe during mounting
- ► Clip on and secure



Separate catalogs are available for other products in the field of ball rail systems:



Integrated measuring system IMS for ball and roller rail systems



IMScompact integrated measuring system for BSHP ball rail systems



Miniature ball guide rail systems



Ball rail systems NRFG for use in the packaging industry and food industry areas.



www.bishnamh.o

Cam roller guides

### Notes

## General notes

Combinations of different accuracy classes Combining ball guide rails and ball runner blocks of different accuracy classes results in different tolerances for the dimensions H and A3. See "Accuracy classes and their tolerances."

### Intended use

- ► The ball rail systems are linear guideways capable of absorbing forces from all transverse directions and moments about all axes. The ball rail system is intended exclusively for guiding and positioning tasks when installed in a machine.
- ▶ The product is intended exclusively for professional use and not for private use.
- ▶ Use for the intended purpose also includes the requirement that users must have read and understood the related documentation completely, in particular the "Safety instructions".

### Misuse

Use of the product in any other way than as described under "Intended use" is considered to be misuse and is therefore not permitted. If unsuitable products are installed or used in safety-critical applications, this may lead to uncontrolled operating statuses in the application which can cause personal injury and/or damage to property. The product may only be used in safety-critical applications if this use has been expressly specified and permitted in the product documentation. Bosch Rexroth AG will not accept any liability for injury or damage caused by misuse of the product. The risks associated with any misuse of the product shall be borne by the user alone.

► The transport of persons

Misuse of the product includes:

# General safety instructions

- ▶ The safety rules and regulations of the country in which the product is used must be observed.
- ▶ All current and applicable accident prevention and environmental regulations must be adhered to.
- ▶ The product may only be used when it is in technically perfect condition.
- ▶ The technical data and environmental conditions stated in the product documentation must be complied with.
- ▶ The product must not be put into service until it has been verified that the final product (for example a machine or system) into which the product has been installed complies with the country-specific requirements, safety regulations and standards for the application.
- ► Rexroth ball rail systems may not be used in zones with potentially explosive atmospheres as defined in ATEX directive 94/9/EC.
- ▶ Rexroth ball rail systems must never be altered or modified. The user may only perform the work described in the "Quick User Guide" or the "Mounting instructions for ball rail systems".
- ► The product is never allowed to be disassembled.
- ▶ At high travel speeds a certain amount of noise is caused by the product. If necessary, appropriate measures should be taken to protect hearing.
- ► The special safety requirements for specific sectors (e.g. crane construction, theaters, food technology) set forth in laws, directives and standards must be complied with.
- ▶ In all cases, the provisions of the following standard should be noted and followed. DIN 637, Safety regulations for dimensioning and operation of Profiled Rail Systems with recirculating rolling elements.

### Directives and standards

Rexroth ball rail systems BSHP are designed for reliability and high precision in dynamic, linear applications. The machine tool industry and other sectors must observe a series of standards and directives. These requirements can vary significantly worldwide. It is therefore essential to understand the legislation and standards that apply in each particular region.

#### **DIN EN ISO 12100**

This standard describes the safety of machinery – general principles for design, risk assessment and risk reduction. It gives a general overview and contains a guide to the major developments governing machines and their intended use.

### Directive 2006/42/EC

The European Machinery Directive describes the basic safety and health requirements for the design and manufacture of machinery. The manufacturer of a machine or his authorized representative has a duty to ensure that a risk assessment has been performed in order to determine the health and safety requirements which have to be fulfilled for that machine. The machine must be designed and built taking into account the results of the risk assessment.

### Directive 2001/95/EC

This directive covers general safety requirements for any product placed on the market and intended for consumers, or likely to be used by consumers under reasonably foreseeable conditions, including products that are made available to consumers in the context of service provision for use by them


### Directive 1999/34/EC

This directive concerns the liability for defective products and applies to industrially manufactured movable objects, irrespective of whether or not they have been incorporated into another movable or immovable object.

### REGULATION (EC) No. 1907/2006 (REACH)

This directive describes the restrictions on the marketing and use of certain dangerous substances and preparations. "Substances" means chemical elements and their compounds as they occur in the natural state or as produced by industry. "Preparations" means mixtures or solutions composed of two or more substances.

# Selection of a linear guide according to DIN 637

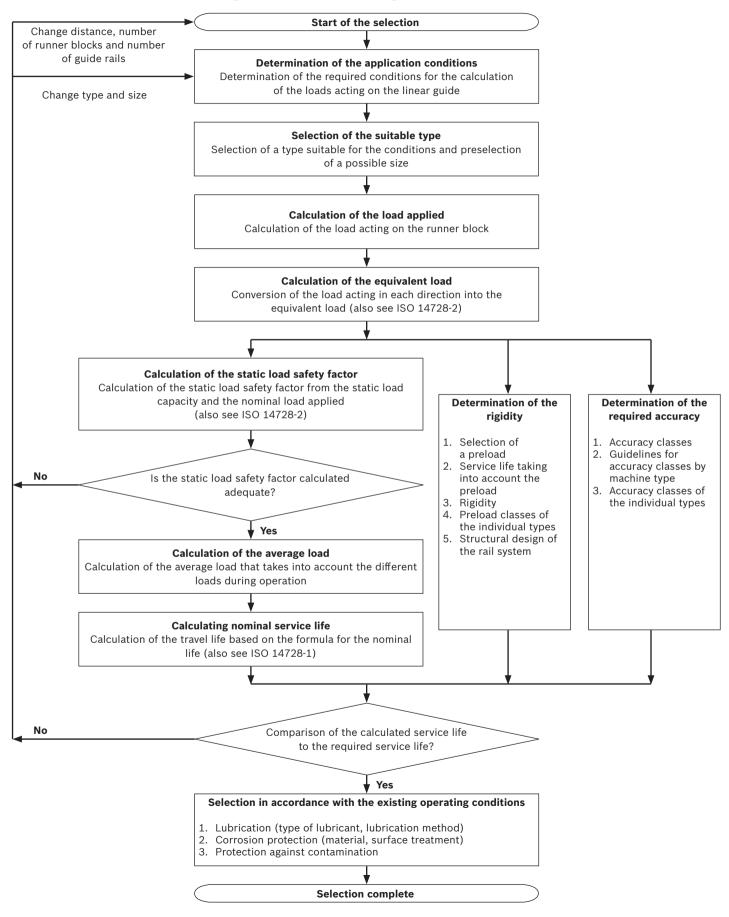

# Product overview ball runner blocks with load ratings and load moments

Ball runner blocks			Page		Size		15	20	25	30	35	45	55	65
DIOCKS					I CA		Load ratings (N) and load moments (Nm)							
					<u>c</u> ↓c	<b>1</b>	Loau rat	iligs (IV) d	and <b>idad</b> i	moments	(INIII)			
Standard, heavy		FNS			С	1)	9860	23400	28600	36500	51800	86400	109000	172000
duty, ball runner		R1651 <sup>3)6)</sup>	483)	106 <sup>6)</sup>	С	2) <b>1)</b>	8 850	22 200	26 700	34 800	49 400	82 400	-	-
blocks <sup>7)</sup> made of		R2001 <sup>4)</sup>	994)		Co	2)	12700	29800	35900	48100	80900		174000	280000
steel <sup>3)</sup>		SNS			C <sub>0</sub>	1)	10 800 <b>95</b>	27 700 <b>300</b>	32 300 <b>410</b>	44 700 <b>630</b>	75 200 <b>1110</b>	123 000 <b>2330</b>	3480	6810
Resist NR <sup>4)</sup> Resist CR <sup>6)</sup>		R1622 <sup>3)6)</sup>	54 <sup>3)</sup>	106 <sup>6)</sup>	M <sub>t</sub>	2)	85	280	380	600	1060	2 220	3460	0010
Resist CR <sup>-7</sup>		R2011 <sup>4)</sup>	994)		M <sub>t0</sub>	1)	120	380	510	830	1740	3560	5550	11100
		112022			M <sub>t0</sub>	2)	100	350	460	780	1 620	3 320	-	
		SNH			ML	1)	68	200	290	440	720	1540	2320	4560
		R1621 <sup>3)6)</sup>	60 <sup>3)</sup>		M	2)	62	190	270	420	700	1 480	_	_
					M <sub>LO</sub>	1)	87	260	360	580	1130	2350	3690	7400
	9				M <sub>L0</sub>	2)	76	240	330	540	1060	2 210	_	_
		FLS			С	1)	12800	29600	37300	46000	66700		139000	223000
		R1653 <sup>3)6)</sup>	<b>50</b> <sup>3)</sup>	106 <sup>6)</sup>	С	2)	11 500	28 200	34 800	43 800		106 000	_	_
		R2002 <sup>4)</sup>	994)		C <sub>0</sub>	<b>1)</b> 2)	18400	41800	52500	66900	116000		245000	404000
	•				Co	1)	15 600	38 800	47 300 <b>530</b>		108 000		4410	8810
		R1623 <sup>3)6)</sup>	EC3)	106 <sup>6)</sup>	M <sub>t</sub>	2)	<b>120</b> 110	<b>380</b> 360	500	<b>800</b> 760	<b>1440</b> 1 370	<b>3010</b> 2 870	4410	8810
		R2012 <sup>4)</sup>	56 <sup>3)</sup> 99 <sup>4)</sup>	1060)	M <sub>t0</sub>	1)	180	<b>540</b>	<b>750</b>	1160	<b>2500</b>	<b>5120</b>	7780	16000
		NZO1Z ·	99.7		M <sub>t0</sub>	2)	150	500	670	1080	2320	4 770	-	-
	~	SLH	62 <sup>3)</sup>	106 <sup>6)</sup>	ML	1)	120	340	530	740	1290	2730	3960	8160
		R1624 <sup>3)6)</sup>	02"	1060	M	2)	110	330	500	710	1 230	2 630	_	_
					M <sub>L0</sub>	1)	180	490	740	1080	2240	4660	6990	14800
					M <sub>L0</sub>	2)	150	460	670	1010	2 090	4 370		_
Standard ball		FKS	0)		С	1)	6720	15400	19800	25600	36600	-	-	-
runner block <sup>7)</sup> made of steel <sup>3)</sup> Resist NR <sup>4)</sup> Resist CR <sup>6)</sup>		R1665 <sup>3)</sup>	52 <sup>3)</sup>	106	С	2) <b>1)</b>	6 030 <b>7340</b>	14 700 <b>16500</b>	18 500	24400 <b>28900</b>	34 900 <b>49300</b>	_	_	_
		R2000 <sup>4)</sup>	99 <sup>4)</sup>		<b>C</b> <sub>0</sub>	2)	6 230	15 300	<b>21200</b> 19 100	26 900	45 800	_	_	_
	•	SKS			M <sub>t</sub>	1)	65	200	280	440	790	_		_
		R1666 <sup>3)</sup> 5	58 <sup>3)</sup> 99 <sup>4)</sup>		M <sub>t</sub>	2)	58	190	260	420	750	_	_	_
					M <sub>t0</sub>	1)	71	210	300	500	1060	-	_	-
					M <sub>t0</sub>	2)	60	200	270	470	980	_	_	_
					M <sub>L</sub>	1)	29	83	130	200	340	-	-	_
					M <sub>L</sub>	2)	27	81	120	200	330	_		_
					M <sub>LO</sub>	<b>1)</b> 2)	32	89	140	230	460	-	-	-
		ENIN			M <sub>L0</sub>	1)	28	84 <b>14500</b>	130 <b>28600</b>	220	430	_		_
		FNN R1693 <sup>3)6)8)</sup>		106 <sup>6)</sup>		1)		24400	35900					_
		SNN			C <sub>0</sub>	1)	_	190						_
		R1694 <sup>3)6)8)</sup>	68 <sup>3)</sup>	106 <sup>6)</sup>	Mt	1)	_		410		_			_
	<b>13</b>				M <sub>to</sub>	1)	_	310	510			-		_
					ML	1)	_	100	290			-		_
					M <sub>L0</sub>	1,	-	165	360	_	-	_	_	_
		FKN			С	1)	-	9600	19800	-	-	-	-	-
		R1663 <sup>3)6)8)</sup>	66 <sup>3)</sup>	106 <sup>6)</sup>	C <sub>0</sub>	1)	-	13600	21200	-	_	_	_	_
		SKN			M <sub>t</sub>	1)	-	120	280	-	_	-	-	-
		R1664 <sup>3)6)8)</sup>	70 <sup>3)</sup>	106 <sup>6)</sup>	M <sub>t0</sub>	1)	-	170	300	-	-	-	-	-
	W				M <sub>L</sub>	1)	-	40	130	-	-	-	-	-
					M <sub>L0</sub>	1)	_	58	140	-	_	-	_	-
Super Ball	<b>€</b>	FKS		1.0-0	С	1)	3900	10100	11400	15800	21100	-	-	-
Runner Block made of steel <sup>3)</sup>		1661 <sup>3)6)</sup>	883)	1076)	F <sub>max</sub>	1)	1500	3900	4400	6100	8100	-	-	-
Resist CR <sup>6)</sup>			253)		M <sub>t</sub>	1)	39	130	170	270	450	-	-	-
		1662 <sup>3)6)</sup>	<b>90</b> <sup>3)</sup>	1076)	M <sub>tmax</sub>	1)	15	50	65	105	175	-	-	-
												<u> </u>		L

Ball runner bloc	ks		Page		Size		15	20	25	30	35	45	55	65
					c C <sub>0</sub> C <sub>0</sub>	c C	Load rat	ings (N) a	and <b>load</b> i	moments	(Nm)			
High-speed ball		FNS	85		С	1)	6880	16300	20000	25500	36200	60400	-	-
runner block made of steel <sup>7)</sup>		R2001 9.	85		C <sub>o</sub>	1)	8860	20800	25100	33500	56500	92400	-	-
	SNS R2011 9.	85		M <sub>t</sub>	1)	66	210	280	440	780	1630	-	-	
				M <sub>t0</sub>	1)	85	270	360	580	1210	2490	-	-	
					M <sub>L</sub>	1)	47	140	200	310	510	1070	-	-
					M <sub>LO</sub>	1)	61	180	250	400	790	1640	-	-
	/9/200	FLS			С	1)	8930	20700	26000	32100	46600	77700	-	-
R2002	R2002 9.	85		C <sub>0</sub>	1)	12800	29200	36600	46700	81100	133000	-	-	
					M <sub>t</sub>	1)	86	260	370	560	1000	2100	-	-
		SLS	1		M <sub>t0</sub>	1)	120	370	520	810	1740	3580	-	-
		R2012 9	9. 85		M <sub>L</sub>	1)	85	240	370	520	900	1910	-	-
					M <sub>LO</sub>	1)	120	340	520	750	1560	3260	-	-
Aluminum ball		FNS			С	1)	9860	23400	28600	36500	51800	-	-	_
runner block <sup>7)</sup>		R1631	94		С	2)	8 850	22 200	26 700	34 800	49 400	-	-	-
	C. C.				F <sub>max</sub>	1) 2)	3000	7200	8800	12200	16200	-	-	-
					M <sub>t</sub>	1)	95	300	410	630	1110	-	-	-
		SNS	96		Mt	2)	85	280	380	600	1060	-	-	-
		R1632	1632		M <sub>tmax</sub>	1) 2)	29	92	125	210	345	-	-	-
					M <sub>L</sub>	1)	68	200	290	440	720	-	-	-
					ML	2)	62	190	270	420	700	-	-	-
					M <sub>Lmax</sub>	1) 2)	16	50	70	110	170	-	-	-

The determination of the dynamic load ratings and load moments is based on a 100,000 m stroke according to DIN ISO14728-1. However, the values are often based on only 50 000 m. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_1$  and  $\mathbf{M}_1$  by 1.26 according to the table.

- 1) Ball runner block without ball chain.
- 2) Ball runner block with ball chain.
- **3)** Steel: All steel parts made of carbon steel.
- 4) Resist NR size 15 35: Ball Runner Block body made of corrosion resistant steel as per DIN EN 10088.
- 5) Resist NR II: All steel components are made from corrosion resistant steel in accordance with DIN EN 10088.
- 6) Resist CR: Steel ball runner block body with corrosion resistant coating, matte-silver finish, hard chrome plated.
- 7) BSHP ball runner block
- 8) BSHP ball runner block size 25 only

For short product names of the design styles, see the product description

# Product overview ball runner blocks with load ratings and load moments

Ball runner			Page		Size		15	20	25	30	35	45	55	65
blocks								20/40	25/70		35/90			
					I CA		Load rat		and <b>load</b>	moments				
					<u>c.</u> ↓c₁	] <mark>←°</mark>		90 ()			()			
Ball runner		FNS			С	1)	5100	12300	15000	20800	27600	-	-	
blocks Resist		R2001 0.	102	İ	С	2)	4 700	11400	14000	19300	27600	-	-	_
NR II <sup>5)7)</sup>				İ	Co	1)	9300	16900	21000	28700	37500	-	-	_
					Co	2)	8 400	15000	18 900	25 800	37500	-	-	_
		SNS			M <sub>t</sub>	1)	63	205	270	460	760	-	-	_
		R2011 0.	103		M <sub>t</sub>	2)	58	190	250	425	760	-	-	-
					M <sub>t0</sub>	1)	90	215	295	500	805	-	_	_
	(A)				M <sub>t0</sub>	2)	81	190	265	450	805	-	-	-
					ML	1)	34	110	150	245	375	-	-	-
					M,	2)	31	100	140	225	375	-	_	_
					M <sub>LO</sub>	1)	49	115	165	265	390	-	_	
					M <sub>L0</sub>	2)	44	100	150	240	390			
		FLS			C	1)	8500	16000	20000	26300	36500	-		
		R2002 0.	102		С	2)	7 600	15 200	I I	25 000	34 800	_	_	_
					C <sub>0</sub>	1)	14000	24400	31600	40100	56200	-	_	
	C. C.				C <sub>0</sub>	2)	12 100	22 500	27 400	37300	52500	_	_	_
		SLS			M <sub>t</sub>	1)	82	265	365	590	1025	-	_	_
		R2012 0.	103		M <sub>t</sub>	2)	73	250	330	560	975	_	_	_
			103		M <sub>t0</sub>	1)	132	310	450	695	1210	-	_	_
	0 3 1				M <sub>t0</sub>	2)	118	295	410	660	1 150	_	_	_
					M <sub>L</sub>	1)	64	190	290	420	710	_	_	
					M	2)	58	180	265	400	675	_	_	_
					M <sub>LO</sub>	1)	104	230	350	495	840	_	_	_
					M <sub>LO</sub>	2)	93	215	320	470	805			
		FKS			C	1)	4500	8200	10500	14500	19300	-	_	
	<b>*</b>	R2000 0.	102		С	2)	3900	8200	9 200	14500	19300	_	_	_
					Co	1)	5600	9400	12600	17200	22400	-	_	_
	C. C.				Co	2)	4 600	9400	10500	17200	22400	_	_	_
		SKS			M <sub>t</sub>	1)	44	125	195	320	545	-	_	
		R2010 0.	103		M.	2)	37	125	175	320	545	_	_	_
			103		M <sub>t0</sub>	1)	55	115	180	295	485	-	_	_
	4			İ	M <sub>t0</sub>	2)	48	115	160	295	485	_	_	_
					ML	1)	16	45	70	110	170	-	_	_
				İ	M,	2)	13	45	60	110	170	_	_	_
					M <sub>L0</sub>	1)	19	40	65	105	150	-	-	_
					MLO	2)	16	40	55	105	150			
Wide ball runne	r	BNS			C	1)	-	14900		-	70700	-	-	_
blocks made of		R1671 <sup>3)6)</sup>	126 <sup>3)</sup>	126 <sup>6)</sup>	С	2)	_	13 700		_	_	_	_	_
steel <sup>3)7)</sup>					Co	1)	-	20600	50200	-	126000	-	-	
Resist CR <sup>6)7)</sup>					C <sub>0</sub>	2)	_	18 200		_	_	_	_	_
	<b>11</b>	CNS			M <sub>t</sub>	1)	_	340	1350	-	3500	-	-	_
		R1672 <sup>3)6</sup>	130 <sup>3)</sup>	130 <sup>6)</sup>	M,	2)	_	310	1 260	_	_	_	_	_
					M <sub>to</sub>	1)	_	470	1870	-	6240	-	-	_
					M <sub>t0</sub>	2)	_	410	1 680	_	_	_	_	_
					ML	1)	_	140	490	-	1470	-	_	_
	<b>*</b>				M	2)	_	130	460	_	_	_	_	_
					M <sub>LO</sub>	1)	_	190	680	-	2620	-	-	_
					M <sub>LO</sub>	2)	_	170	620	_		_	_	_

The determination of the dynamic load ratings and load moments is based on a 100,000 m stroke according to DIN ISO14728-1. However, the values are often based on only 50 000 m. For comparison: Multiply the values **C**, **M**, and **M**, by 1.26 according to the table.

- 1) Ball runner block without ball chain.
- 2) Ball runner block with ball chain.
- 3) Steel: All steel parts made of carbon steel.
- 4) Resist NR size 15 35: Ball Runner Block body made of corrosion resistant steel as per DIN EN 10088.
- 5) Resist NR II: All steel components are made from corrosion resistant steel in accordance with DIN EN 10088.
- 6) Resist CR: Steel ball runner block body with corrosion resistant coating, matte-silver finish, hard chrome plated.
- 7) BSHP ball runner block
- 8) BSHP ball runner block size 25 only

For short product names of the design styles, see the product description

# Product overview ball guide rails with rail lengths

Ball guide rails can be cut to length as desired by the customer. The maximum lengths for a one-piece rail section can be found in the following table and in the "Ball guide rails" section. If longer rails are required, Bosch Rexroth will supply them as multi-piece ball guide rails.

Ball guide rail	Ball guide rails										
				15	20	25	30	35	45	55	65
				Rail len	gth (mm	)					
Standard ball guide rails made of steel		SNS / SNO R1605 .3 / R1605 .B For mounting from above with cover strip and strip clamps	110	3 836	5 816	5 816	5 836	5 836	5 771	3 836	3 746
		SNS / SNO R1605 .6 / R1605 .D For mounting from above with cover strip and protective caps	112	3 836	5 816	5 816	5 836	5 836	5 771	3 836	3 746
		SNS / SNO R1605 .0 / R1605 .C For mounting from above with plastic mounting hole plugs	114	3 836	5 816	5 816	5 836	5 836	5 771	3 836	3 746
		SNS R1606 .5 For mounting from above, for mounting hole plugs made of steel	116	_	_	5 816	5 836	5 836	5 771	3 836	3 746
		SNS R1607 .0 For mounting from below	118	3 836	5 816	5 816	5 836	5 836	5 771	3 836	3 746
Standard ball guide rails Resist NR II <sup>1)</sup>		SNS R2045 .3 For mounting from above with cover strip and strip clamps	120	1 856	3 836	3 836	3 836	3 836	-	-	_
		SNS R2045 .0 For mounting from above with plastic mounting hole plugs	121	1 856	3 836	3 836	3 836	3 836	_	-	_
		SNS R2047 .0 For mounting from below	121	1 856	3 836	3 836	3 836	3 836	_	_	=
Standard ball guide rails Resist CR <sup>2)</sup>		SNS R1645 .3 For mounting from above with cover strip and strip clamps	122	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1645 .0 For mounting from above with plastic mounting hole plugs	123	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746
		SNS R1647 .0 For mounting from below	123	3 836	3 836	3 836	3 836	3 836	3 776	3 836	3 746

Ball guide rails		Page	Size		
			20/40	25/70	35/90
			Rail length (mm)		
				,	
Wide ball guide rails made of stee	R1675 .0 For mounting from above with plastic mounting hole plugs	134	3 836	3 836	3 836
	BNS R1676 .5 For mounting from above, for mounting hole plugs made of steel	136	-	3 836	3 836
	BNS R1677 .0 For mounting from below	137	3 836	3 836	3 836
Wide ball guide rails Resist CR <sup>2)</sup>	R1673 .0 For mounting from above with plastic mounting hole plugs	134	3 836	3 836	3 836

<sup>1)</sup> Resist NR II: Ball guide rail made of corrosion resistant steel as per DIN EN 10088

For short product names of the design styles, see the product description

<sup>2)</sup> Resist CR: Ball guide rail made of steel with corrosion resistant coating, matte-silver finish, hard chrome plated

# General technical data and calculations

#### **General notes**

The general technical data and calculations apply to all ball rail systems i.e. to all ball runner blocks and ball guide rails. Specific technical data relating to the individual ball runner blocks and ball guide rails is given separately.

### Preload classes

To cover the widest possible range of applications, Rexroth ball runner blocks are available in different preload classes.

The following preload classes are available:

- ▶ ball runner block without preload (preload class C0)
- ▶ ball runner blocks with moderate preload (preload class C1)
- ▶ ball runner blocks with average preload (preload class C2)
- ▶ ball runner blocks with high preload (preload class C3)

To prevent reductions to the service life, the preload should not exceed 1/3 of the load on bearing F.

In general, the rigidity of the ball runner block rises with increasing preload. If vibrations occur, select a correspondingly high preload (≥ preload class C2).

# Guide systems with parallel rails

When choosing the preload class, also pay attention to the permissible parallelism offset of the rails ("Accuracy class selection criterion"). When assembling ball rail systems of accuracy class N, we recommend preload class C0 or C1 in order to avoid distortive stress due to the tolerances.

### Travel speed

v<sub>max</sub> : 3-10 m/s

For exact values, see the individual ball runner blocks.

### Acceleration

 $a_{max}: 250-500 \text{ m/s}^2$ 

For exact values, see the individual ball runner blocks. (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )
If preload force  $F_{pr}$  is canceled,  $a_{max} = 50 \text{ m/s}^2$  applies


# Operating temperature range


t: 0-80 °C

Up to 100°C is permissible for a short time. For operation at negative temperatures, please consult us. For ball runner blocks without ball chain: Lower limit - 10 °C.

### Friction

The friction coefficient  $\mu$  of Rexroth's ball rail system is approximately 0.002 to 0.003 (without the friction of the seal).



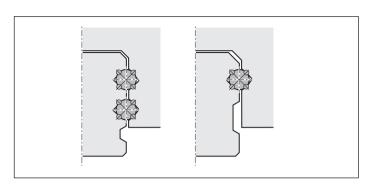

Due to the Rexroth design with four rows of balls, there are always **two points of contact** in all the directions of loading. This reduces the friction to a minimum.

Other ball rails with two or four rows of balls with **four points of contact** have multiple friction: due to the differential slip with lateral loading and with a comparable preload without load, the gothic raceway profile causes higher friction (depending on the conformity and the load, up to five times the friction coefficient). This high friction leads correspondingly to greater heat.

### Seals

Seals are use to prevent dirt, chips and coolants, etc. from working their way into the inside of the ball runner block, thereby preventing reductions to its service life. For further information, see "Selection criteria/seals".

### Standard seal (SS)

Universal seals are fitted as standard in Rexroth ball runner blocks. They have a uniform sealing effect for ball guide rails with and without cover strips. Low friction and a good sealing effect have both been taken into account in the design. For applications where effective sealing is required.

### Low-friction (LS)

For special requirements with regard to ease of movement.

### Double-lip seal (DS)

For increased exposure to media

### Front seal

For applications in environments with fine dirt or metal particles, as well as coolants or cutting fluids.

Interchangeable during servicing.

Front seals are available as accessories for mounting by the customer.

### FKM seal

For applications in extreme environments with fine dirt or metal particles, as well as heavy use of coolants or cutting fluids.

Interchangeable during servicing.

FKM front seals are available as accessories for mounting by the customer.

### Cover plate wiper

For use in environments with coarse dirt or chips.

Cover plate wiper are available as accessories for mounting by the customer.

# General technical data and calculations

How to select a linear guide system according to DIN 637 is described on page 10. The necessary calculations are explained in the following chapter. They are integrated in the "Linear Motion Designer" calculation program. You will find the link to the download in the chapter "further information".

### Forces and moments


In Rexroth ball rail systems the raceways are arranged at a pressure angle of 45°. This results in the same high load capacity of the entire system in all four main directions of loading. The ball runner blocks may be subjected to both forces and load moments.

### Forces in the four main directions of loading

- ► Tension F, (positive z-direction)
- ▶ Pressure -F, (negative z-direction)
- ► Side load F<sub>v</sub> (positive y-direction)
- ► Side load -F<sub>v</sub> (negative y-direction)

### **Moments**

- ► Torsional moment M<sub>x</sub> (around the y-axis)
- ► Longitudinal moment M<sub>v</sub> (around the y-axis)
- ► Longitudinal moment M<sub>7</sub> (around the z-axis)



### **Definition of load capacities**

### Dynamic load capacity C

The radial load (whose extent and direction does not change) that a linear anti-friction bearing can theoretically absorb for a nominal life covering  $10^5$  m (according to DIN ISO 14728-1).


Note: The dynamic load capacities in the tables are above the DIN or ISO values.

These values have been confirmed in tests.

### Static load rating Co

Static load in the load direction that corresponds to a calculated load in the center of the contact point with the greatest load between the ball and raceway of 4200 MPa.

Note: With this stress at the contact point, permanent overall deformation of the ball and the track zone occurs that corresponds to about 0.0001 times the ball diameter (according to DIN ISO 14 728-1).



### **Definition of load moment capacities**

### Dynamic torsional moment load capacity M,

Comparative dynamic moment around the X-axis, which causes a load equivalent to the dynamic load capacity C.

### Static torsional moment load capacity M<sub>+0</sub>


The comparable static moment around the x-axis that induces a load corresponding to the static load capacity  $C_0$ .

### Dynamic longitudinal moment load capacity M<sub>1</sub>

The dynamic comparable dynamic moment around the transverse axis y or the vertical axis z that induces a load corresponding to the dynamic load capacity C.

### Static longitudinal moment load capacity M<sub>L0</sub>

The static comparable dynamic moment around the transverse axis y or the vertical axis z that induces a load corresponding to the static load capacity  $C_0$ .



# Definition and calculation of the nominal service life

The calculated service life which an individual linear rolling bearing, or a group of apparently identical rolling element bearings operating under the same conditions, can attain with a 90% probability, with contemporary, commonly used materials and manufacturing quality under conventional operating conditions (as per ISO 14728-1).

### Nominal life in meters

(1) 
$$L_{10} = \left(\frac{C}{F_m}\right)^3 \cdot 10^5 \text{ m}$$

Service life in operating hours with constant stroke and constant stroke repetition rate

(2) 
$$L_{h 10} = \frac{L_{10}}{2 \cdot s \cdot n \cdot 60}$$

If the stroke length s and the stroke repetition rate n are constant over the total service life, you can use formula (2) to determine the service life in operating hours.

# Nominal service life at variable travel speed

(3) 
$$L_{h 10} = \frac{L_{10}}{60 \cdot v_{m}}$$

As an alternative, it is possible to use formula (3) to calculate the service life in operating hours using the average travel speed  $\nu_{\rm m}$ .

This average travel speed  $v_m$  is calculated with speeds that can be changed on a stepwise basis using discrete time steps  $q_{tn}$  of the individual load stages (4).

(4) 
$$V_m = \frac{|v_1| \cdot q_{t1} + |v_2| \cdot q_{t2} + ... + |v_n| \cdot q_{tn}}{100\%}$$

### Modified life expectancy

$$L_{na} = a_1 \cdot \left(\frac{C}{F_m}\right)^3 \cdot 10^5 \,\mathrm{m}$$

$$L_{ha} = \frac{L_{na}}{2 \cdot s \cdot n \cdot 60}$$

If a 90 percent requisite reliability is not enough, you must reduce the service life values by a factor of  $a_1$  in accordance with the table below.

Requisite reliability (%)	L <sub>na</sub>	Factor a <sub>1</sub>
90	L <sub>10a</sub>	1.00
95	L <sub>5a</sub>	0.64
96	L <sub>4a</sub>	0.55
97	L <sub>3a</sub>	0.47
98	L <sub>2a</sub>	0.37
99	L <sub>1a</sub>	0.25

### Notes

DIN ISO 14728-1 limits the validity of the formula (1) to dynamically equivalent loads  $F_m < 0.5$ . However, in our tests we verified that under ideal operating conditions this service life formula can be applied up to loads of  $F_m = C$ . Under some circumstances, with stroke lengths below  $2 \cdot \text{ball runner block length B}_1$  (see the dimension tables) a load rating reduction may be required. Please consult us.

# General technical data and calculations

### Load on bearing for calculating the service life

### Note

In general, both the static and dynamic load ratios should not be below the minimum value of 4.0. In the case of applications that place high demands on rigidity and/or the service life, a higher load ratio is required.

With tensile loads, check the screw stability. See the chapter entitled "Instruction for mounting".

Dynamic load ratio

 $\frac{C}{F_{m, max}}$ 

Static load ratio

 $\frac{C_0}{F_{eff}, max}$ 

### Combined equivalent bearing load

In the case of a combined vertical and horizontal external load, calculate the dynamic equivalent load  $F_{comb}$  according to formula (5).


#### Note

The structure of the ball rail system permits this simplified calculation.

### Note

Reduce an external load that affects the ball runner block at any angle with the correct sign to  $F_y$  and  $F_z$  and insert the amounts into formula (5) or (6).

# (5) $F_{comb} = |F_y| + |F_z|$

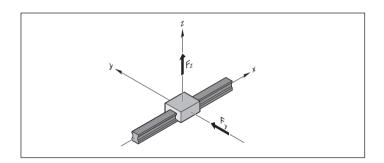

# Combined equivalent load on bearing in conjunction with moments


Using formula (6), you can combine all the partial loads that occur in a load case into one single comparison load. i.e. the combined equivalent load on bearing.

### Notes

Including moments as stated in formula (6) only applies to an individual ball guide rail with just one ball runner block. The formula is simpler for other combinations.

The forces and moments plotted in the coordinate system can also have an effect in the opposite direction. Reduce an external load that affects the ball runner block at any angle to  $F_y$  and  $F_z$  and insert the amounts into formula (6). The structural design of the ball runner blocks allows this simplified calculation.


(6) 
$$F_{comb} = |F_y| + |F_z| + C \cdot \frac{|M_x|}{M_t} + C \cdot \frac{|M_y|}{M_L} + C \cdot \frac{|M_z|}{M_L}$$

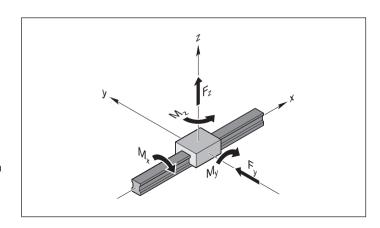

### **Considering the internal** Preload force F<sub>pr</sub>

To increase the rigidity and precision of the guide system, it is advisable to use preloaded ball runner blocks (cf. "System preload selection criterion").

When using ball runner blocks of preload classes C2 and C3, it may be necessary to consider the internal preload force; this is because both rows of balls a and b are preloaded against one another by a specific oversize at an internal preload force  $F_{pr}$  and deform by the amount  $\delta_{pr}$ (see the diagram).

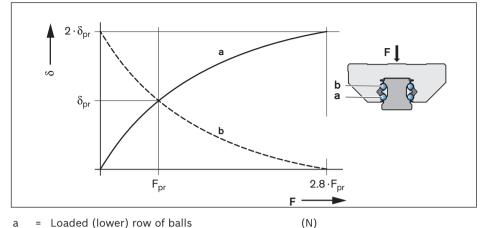

- = Loaded (lower) row of balls
- (N)
- = Non-loaded (upper) row of balls
- Deformation of rolling contact at F
- (-) (-)
- Deformation of rolling contact at F<sub>pr</sub> Load on the ball runner block
- (N)

= Internal preload force

(N)

### Effective equivalent load on bearing

From an external load amounting to 2.8 times the internal preload force F<sub>pr</sub> onward, a row of balls becomes preload-free.

### Note

Under highly dynamic load conditions, the combined equivalent bearing load should be  $F_{comb}$  < 2.8 ·  $F_{pr}$  to prevent damage to anti-friction bearings due to slippage.

(7) 
$$F_{\text{eff}} = F_{\text{comb}}$$

(8) 
$$F_{\text{eff}} = \left(\frac{F_{\text{comb}}}{2.8 \cdot F_{\text{pr}}} + 1\right)^{3/2} F_{\text{pr}}$$

 $F_{comb} > 2.8 \cdot F_{pr}$ In this case, the internal preload force F<sub>pr</sub> does not affect the service life.

### Case 2

 $F_{comb} \le 2.8 \cdot F_{pr}$ The preload force F<sub>pr</sub> is included in the calculation of the effective equivalent load on bearing.

## General technical data and calculations

### Dynamic equivalent load on bearing

The determination of the dynamic equivalent load on bearing  $F_m$  for the calculation of the service life is implemented according to track ratios  $q_m$  according to formula (9).

(9) 
$$F_m = \frac{3}{\sqrt{(F_{eff 1})^3 \cdot \frac{q_{s1}}{100 \%} + (F_{eff 2})^3 \cdot \frac{q_{s2}}{100 \%} + ... + (F_{eff n})^3 \cdot \frac{q_{sn}}{100 \%}}$$

### Equivalent static load on bearing

With a combined vertical and horizontal external static load in conjunction with a static torsional or longitudinal moment, calculate the static equivalent load on bearing  $F_{0\ comb}$  according to formula (10).

(10) 
$$F_{0 \text{ comb}} = |F_{0y}| + |F_{0z}| + C_0 \cdot \frac{|M_{0x}|}{M_{to}} + C_0 \cdot \frac{|M_{0y}|}{M_{L0}} + C_0 \cdot \frac{|M_{0z}|}{M_{L0}}$$

#### Notes

The static equivalent load on bearing  $F_{0 \text{ comb}}$  must not exceed the static load capacity  $C_0$ . Formula (10) only applies when using a single ball guide rail. Reduce an external load that affects the ball runner block at any angle to  $F_{0y}$  and  $F_{0z}$  and insert the amounts into formula (10).

### Definitions and calculation for dynamic and static load ratios

Using the ratio of load rating to load of the ball runner blocks, you can make a preselection of the guideway. The dynamic loading ratio  $C/F_{max}$  and the static loading ratio  $C_0/F_{0\,max}$  should be selected according to the application. The necessary load ratings are calculated from this. The load rating overview yields the corresponding dimensions and format.

### Recommended values for load ratios

The table below contains guideline values for the load ratios. The values are offered merely as a rough guide reflecting typical customer requirements (e.g. service life, accuracy, rigidity) by sector and application.

Case 1: Static load  $F_{0 max} > F_{max}$ :

Dynamic ratio = 
$$\frac{C}{F_{\text{max}}}$$

Static ratio = 
$$\frac{C_0}{F_{0 \text{ max}}}$$

Static ratio = 
$$\frac{C_0}{F_{\text{max}}}$$

Machine type/sector	Application example	C/Fmax	C <sub>0</sub> /F <sub>0 max</sub>
Machine tools	General	6 9	> 4
	Turning	6 7	> 4
	Milling	6 7	> 4
	Grinding	9 10	> 4
	Engraving	5	> 3
Rubber and plastics processing machinery	Injection molding	8	> 2
Woodworking and wood processing machines	Sawing, milling	5	> 3
Area of mounting/handling technology and industrial robots	Handling	5	> 3
Oil hydraulics and pneumatics	Lifting/lowering	6	> 4

### Static load safety factor S<sub>0</sub>

You must verify mathematically any structural design involving rolling contact with regard to the static load safety factor. The static load safety factor for a linear guide results from the following equation:

$$S_0 = \frac{C_0}{F_{0 \text{ max}}}$$

In this connection,  $F_{0 \text{ max}}$  represents the maximum load amplitude that can occur, which can affect the linear guide. It does not matter whether this load is exerted only for a short period. It may represent the peak amplitude of an overall dynamic loading. For dimensioning, the data shown in the table applies.

Static load safety factor S <sub>0</sub>	Conditions of use
Overhead hanging arrangements or applications with serious potential risks	≥ 12
High dynamic load when at standstill, contamination.	8 – 12
Normal dimensioning of machinery and plant without full knowledge of the load parameters or connection details.	5 – 8
Full knowledge of all the load data. Vibration-free operation is ensured.	3 – 5

### **Key to formulas**

Formula	Unit	Designation
a <sub>1</sub>	-	Life expectancy factor
С	N	Dynamic load capacity
C <sub>0</sub>	N	Static load capacity
F <sub>max</sub>	N	Maximum dynamic load
F <sub>0 max</sub>	N	Maximum static load
F <sub>comb</sub>	N	Combined equivalent bearing load
F <sub>0 comb</sub>	N	Equivalent static load on bearing
F <sub>eff</sub>	N	Effective equivalent load on bearing
F <sub>eff 1 - n</sub>	N	Uniform effective individual loads
F <sub>m</sub>	N	Dynamic equivalent load on bearing
F <sub>pr</sub>	N	Preload force
F <sub>y</sub>	N	External load due to a resulting force in the y-direction
F <sub>oy</sub>	N	External load due to a static force in the y-direction
F <sub>z</sub>	N	External load due to a resulting force in the z-direction
F <sub>0z</sub>	N	External load due to a static force in the z-direction
M <sub>t</sub>	Nm	Dynamic torsional moment load capacity <sup>1)</sup>
M <sub>tO</sub>	Nm	Static torsional moment load capacity <sup>1)</sup>
M <sub>L</sub>	Nm	Dynamic longitudinal moment load capacity <sup>1)</sup>
M <sub>LO</sub>	Nm	Static longitudinal moment load capacity <sup>1)</sup>
M <sub>x</sub>	Nm	Load due to the resultant moment around the x-axis

Formula	Unit	Designation
M <sub>Ox</sub>	Nm	Load due to the static moment around the x-axis
M <sub>y</sub>	Nm	Load due to the resultant moment around the y-axis
M <sub>Oy</sub>	Nm	Load due to the static moment around the y-axis
M <sub>z</sub>	Nm	Load due to the resultant moment around the z-axis
M <sub>Oz</sub>	Nm	Load due to the static moment around the z-axis
L <sub>10</sub>	m	Nominal life (travel range)
L <sub>h 10</sub>	h	Nominal life (time)
L <sub>na</sub>	m	Modified life expectancy (travel range)
L <sub>ha</sub>	h	Modified life expectancy (time)
n	min <sup>-1</sup>	Stroke repetition rate (full cycles)
S	m	Stroke length
S <sub>0</sub>	-	Static load safety factor
v <sub>m</sub>	m/min	Average linear speed
v <sub>1</sub> v <sub>n</sub>	m/min	Travel speeds of phases 1 n
q <sub>t1</sub> q <sub>tn</sub>	%	Discrete time steps for $v_1 \dots v_n$ of phases $1 \dots n$
Refer to the tak	ole for the	values

# Design and version

Ball runner bloc	:ks		Application area	Load-bearing capacity	Special feature
Standard ball runner block made of steel		FNS R1651 <sup>1)2)5)</sup> R2001 <sup>3)4)</sup>	For high rigidity requirements	High (H)	For mounting from above and below
		FLS R1653 <sup>1)2)5)</sup> R2002 <sup>3)</sup>	For the most demanding rigidity requirements	Very high	For mounting from above and below
		FKS R1665 R2000 <sup>3)</sup>	For restricted space in the longitudinal direction	Middle	For mounting from above and below Supplementary to DIN 645-1
			For restricted space in the transverse direction	High (H)	For mounting from above
		SLS R1623 <sup>1)2)5)</sup> R2012 <sup>3)</sup>	For restricted space in the transverse direction	Very high	For mounting from above
		R1666	For restricted space in longitudinal and transverse direction	Middle	For mounting from above
		SNH R1621 <sup>1)2)5)</sup>	For restricted space in the transverse direction and high rigidity requirements	High (H)	Higher rigidity than SNS
			For restricted space in the transverse direction and high rigidity requirements	Very high	Higher rigidity than SLS
Standard ball runner block made of steel and Resist CR		FNN R1693 <sup>2)</sup>	For restricted upward space	High (H)	Lower rigidity than FNS Not defined in DIN 645-1
			For cases of restricted space avialability in the upward and longitudinal direction	Middle	Lower rigidity than FKS Not defined in DIN 645-1
			For restricted upward and longitudinal space	High (H)	Lower rigidity than SNS Not defined in DIN 645-1
			For restricted space in the upward, longitudinal and transverse direction	Middle	Lower rigidity than SKS Not defined in DIN 645-1

- 1) Heavy-duty ball runner block
- 2) BSHP ball runner block
- 3) Resist NR
- 4) Resist NR II
- 5) Resist CR

For short product names of the design styles, see the product description

Ball runner blocks		Application area	Load-bearing capacity	Special feature
Super ball runner block made of steel and Resist CR		For compensating large tolerances in the adjoining structure	Middle	At least 2 ball runner blocks required per rail
		For compensating large tolerances in the adjoining structure	Middle	At least 2 ball runner blocks required per rail
Aluminum ball runner block		For light-weight construction type for compensating low tolerances with connected structures	High (H)	For mounting from above and below
		For light-weight construction type for compensating low tolerances with connected structures	High (H)	For mounting from above
High-speed ball runner block made of steel		For maximum travel speeds (up to 10 m/s)	High (H)	For mounting from above and below
		For maximum travel speeds (up to 10 m/s)	High (H)	For mounting from above
Wide Ball Runner Block made of steel and Resist CR	BNS R1671 <sup>2)</sup>	For high torsional moments on rails	Very high	For mounting from above and below
6		For high torsional moments on rails with restricted lateral space	Very high	For mounting from above

# Design and version

Ball guide rails		Application area	Fastening type	Special feature
Standard ball guide rail made of steel	SNS / SNO R1605 .3 R1605 .B R1645 .3 <sup>2)</sup> R2045 .3 <sup>1)</sup>	Standard version Very harsh environments Robust strip clamp	For mounting from above	With cover strip and strip clamp. A single cover for all holes. No end-face hole required for strip clamp.
	SNS / SNO R1605 .6 R1605 .D	Harsh environments Compact strip clamp	For mounting from above	With cover strip and protective cap. A single cover for all holes.
	SNS / SNO R1605 .0 R1605 .C R1645 .0 <sup>2)</sup> R2045 .0 <sup>1)</sup>	Inexpensive	For mounting from above	With plastic mounting hole plugs.  No extra space required at rail ends.
	SNS R1606 .5	More resistant to mechanical influences (e.g. shocks) Very harsh environments	For mounting from above	With steel mounting hole plugs. No extra space required at rail ends.
	SNS R1607 .0 R1647 .0 <sup>2)</sup> R2047 .0 <sup>1)</sup>	Easy access to the mounting base underside, best sealing action of end seals	For mounting from below	Use of larger screws than for mounting from above. Greater side loads permitted. No extra space required at rail ends.
Wide ball guide rails made of steel	BNS R1675 .0 R1673 .0 <sup>2)</sup>	High moment rigidity	For mounting from above	With plastic mounting hole plugs. No extra space required at rail ends.
	BNS R1676 .5	More moment rigidity, more resistant to mechanical influences (e.g. shocks) Very harsh environments	For mounting from above	With steel mounting hole plugs. No extra space required at rail ends.
<	BNS R1677 .0	High moment rigidity Best sealing action of end seals	For mounting from below	Use of larger screws than for mounting from above. Larger side loads are permitted than for the single-row series. No extra space required at rail ends.

<sup>1)</sup> Resist NR II

For short product names of the design styles, see the product description

<sup>2)</sup> Resist CR

# Accessories

Accessories Connection elements a options for the ball run	 Application area
Cover plate wiper	The cover plate wiper is an additional element for wiping off coarse particles or dealing with contamination that has been deposited on the ball guide rail.  When making your selection, please note whether the ball guide rail is used with or without cover strips.
Front seal Two-piece	The front seal effectively prevents dirt, liquid or small particles from entering the ball runner block. This means that the sealing effect is improved even more.  The two-part front seal can also be retrofitted via the ball guide rail.
FKM seal One and two-piece	Better sealing effect than front seal but higher friction. Used for very heavy contamination, cooling lubricants or aggressive media.  Chemical and temperature resistant.
Seal kit	When using cover plate wiper and front seal simultaneously, the seal kit is recommended.
Lubrication adapter	For oil and grease lubrication from above for SNH and SLH ball runner blocks (high versions).
Lubrication plate	Enables further variations for lubrication of ball runner blocks; Available for lube connection with metric thread or pipe thread.
Front lube unit	For applications requiring very long relubrication intervals. They allow travel distances of up to 25,000 km without relubrication under normal loads. The function is only assured where there is no exposure to liquids and little contamination. The maximum operating temperature is 60 °C.
Bellows	Bellows are available in various versions, with or without lubrication plate.  Bellows in heat-resistant design are metalized on one side and are therefore not flammable, resistant to sparks, welding spatter or hot chips. Temperature stability briefly up to 200 °C and operating temperature of 80 °C possible.
Clamping and braking units	Clamping elements can be used to secure the ball rail system against displacement in the static state. With braking units, the ball rail system can be braked in the dynamic state and secured against displacement in the resting state. The following versions are available:  Hydraulic, pneumatic and manual clamping units.

# System preload

### **Definition of preload**

Ball Runner Blocks can be preloaded to increase rigidity. The internal preload forces that occur in this connection must be considered in the life expectancy calculation. You can choose the preload class to match the area of application. Refer to the table for preload force  $F_{\rm pr}$ .

### **Example**

- ► Area of application: Precise guide systems with low external load and high overall rigidity requirements. This results in preload class C1.
- ▶ Selected ball runner block FNS R1651 314 20
- ► The selected ball runner block yields a preload force F<sub>pr</sub> according to the table.
- ► It is installed at 840 N internal preload force F<sub>pr</sub>.

Code	Preload	Application area				
C0 <sup>1)</sup>	Without preload (clearance)	For particularly smooth-running guide systems with the lowest possible friction for application with large installation tolerances. Clearance versions are available only in accuracy classes N and H.				
C1	Moderate preload	For precise guide systems with low external loads and high demands on overall rigidity.				
C2	Medium preload	For precise guide systems with both high external loading and high demands on overall rigidity; also recommended for single-rail systems. Above average moment loads can be absorbed without significant elastic deflection. Further improved overall rigidity with only medium moment loads.				
С3	High preload	For highly rigid guide systems, e.g. precision tooling machines etc.  Above-average loads and moments are caught with the lowest possible elastic deformation. Ball runner blocks with preload C3 only available in accuracy classes UP, SP and XP, heavy duty ball runner blocks only available in UP, SP and P.				

<sup>1)</sup> In the case of ball runner blocks without preload (preload class C0), there is a clearance between the ball runner block and the rail of 1 to 10  $\mu$ m. When using two rails and more than one ball runner block per guide rail, this clearance is usually equalized by parallelism tolerances.

### Preload force F<sub>pr</sub>

Ball runner blocks	Material nu	ımbers	Format	Preload	Size							
				class	15	20	25	30	35	45	55	65
					Preloa	d force	F <sub>pr</sub> (N)					
Standard ball runner	R1651 <sup>3)6)</sup>	R2001 <sup>4)</sup>	FNS	C1 <sup>1)</sup>	160	380	460	630	840	1 360	1 960	2 46
blocks	R1622 <sup>3)6)</sup>	R2011 <sup>4)</sup>	SNS	C1 <sup>2)</sup>	150	350	430	590	840	1 270		
Heavy-duty ball runner blocks	R1621 <sup>3)6)</sup>		SNH	C2 <sup>1)</sup>	620	1500	1 820	2 540	3 350	5 450	7 860	9 84
· Steel <sup>3)</sup>				C2 <sup>2)</sup>	580	1390	1700	2 340	3 350	5 060		
· Resist NR <sup>4)</sup>				C3 <sup>1)</sup>	1 010	2 440	2 960	4 120	5 450	8 850	12800	1600
· Resist CR <sup>6)</sup>				C3 <sup>2)</sup>	950	2 260	2 770	3 810	5 450	8 230		
	R1653 <sup>3)6)</sup>	R2002 <sup>4)</sup>	FLS	C1 <sup>1)</sup>	200	490	610	800	1110	1 810	2 480	3 26
	R1623 <sup>3)6)</sup>	R2012 <sup>4)</sup>	SLS	C1 <sup>2)</sup>	180	460	550	760	1060	1 640		
	R1624 <sup>3)6)</sup>		SLH	C2 <sup>1)</sup>	800	1 950	2 430	3 200	4 450	7 230	9940	1300
				C2 <sup>2)</sup>	720	1 850	2 200	3 040	4 240	6 550		
				C3 <sup>1)</sup>	1 300	3 170	3 950	5 200	7 230	11 800	16 100	21200
				C3 <sup>2)</sup>	1 170	3000	3 580	4 940	6 890	10 600		
Standard ball runner	R1665 <sup>3)6)</sup>	R2000 <sup>4)</sup>	FKS	C1 <sup>1)</sup>	110	250	320	440	590			
blocks	R1666 <sup>3)6)</sup>	R2010 <sup>4)</sup>	SKS	C1 <sup>2)</sup>	90	250	280	440	590			
- Steel <sup>3)</sup>	R1693 <sup>3)6)</sup>		FNN	C1 <sup>1)</sup>		290	460					
- Resist NR <sup>4)</sup> - Resist CR <sup>6)</sup>	R1694 <sup>3)6)</sup>		SNN									
· Resist CR <sup>9</sup> /	R1663 <sup>3)6)</sup>		FKN	C1 <sup>1)</sup>		190	320					
	R1664 <sup>3)6)</sup>		SKN									
Super Ball Runner Blocks	R1661 <sup>3)6)</sup>		FKS	C1 <sup>1)</sup>	80	200	230	320	420			
- Steel <sup>3)</sup>	R1662 <sup>3)6)</sup>		SKS									
- Resist CR <sup>6)</sup>												
Standard high speed ball	R20019.		FNS	C2 <sup>1)</sup>	420	1 020	1 240	1 720	2 280	3 710		
runner blocks	R20119.		SNS	02	720	1 020	1 240	1 720	2 200	0710		
- Steel	R20029.		FLS	C2 <sup>1)</sup>	700	1 330	1 660	2 180	3 020	4 930		
	R20129.		SLS	02	100	1 000	1 000	2 100	0 020	7 300		
Standard ball runner	R1631		FNS	C1 <sup>1)</sup>	160	380	460	630	840			
blocks	R1632		SNS	C1 <sup>2)</sup>	150	350	430	590	840			
- Aluminum	111002		0110		100	000	400		040			
Standard ball runner	R20010.		FNS	C1 <sup>1)</sup>	100	250	300	420	550			
blocks	R20110.		SNS	C1 <sup>2)</sup>	90	230	280	390	550			
- Resist NR II <sup>5)</sup>				C2 <sup>1)</sup>	410	980	1 200	1 660	2 210			
				C2 <sup>2)</sup>	380	910	1 120	1540	2 210			
	R20020.		FLS	C1 <sup>1)</sup>	170	320	400	530	730			
	R20120.		SLS	C1 <sup>2)</sup>	150	300	360	500	700			
				C2 <sup>1)</sup>	680	1 280	1 600	2 100	2 920			
				C2 <sup>2)</sup>	610	1 220	1 450	2 000	2 780			
	R20000.		FKS	C1 <sup>1)</sup>	90	160	210	290	390			
	R20100.		SKS	C1 <sup>2)</sup>	80	160	180	290	390			
	1		1	1 ==						l	1	L
Wide Ball Runner Blocks	R1671 <sup>3)6)</sup>		CNS	C1 <sup>1)</sup>		270	580		1160			
· Steel <sup>3)</sup>				C1 <sup>2)</sup>		260	550			-		
			1	1 -	1	200	, 555	I	l .	I .		1
- Resist CR <sup>6)</sup>	R1672 <sup>3)6)</sup>		BNS	C1 <sup>1)</sup>		270	580					

- 1) Ball runner block without ball chain.
- 2) Ball runner block with ball chain.
- 3) Steel: All steel parts made of carbon steel.
- 4) Resist NR size 15 35: Ball Runner Block body made of corrosion resistant steel as per DIN EN 10088.
- 5) Resist NR II: All steel components are made from corrosion resistant steel in accordance with DIN EN 10088.
- 6) Resist CR: Steel ball runner block body with corrosion resistant coating, matte-silver finish, hard chrome plated.

Rigidity ball runner block
Due to the large number of variants only one type is listed. Further rigidity diagrams are available on request.

### Rigidity of ball rail system with preloading

### **Example**

## **Ball runner blocks FNS** Flanged, normal, standard height

Size 35:

- a) Ball runner blocks R1651 31. 20 for preload C1
- b) Ball runner blocks R1651 32. 20 for preload C2
- c) Ball runner blocks R1651 33. 20 for preload C3

### **Example**

### **Ball runner blocks FLS** Flanged, long, standard height

Size 35:

- a) Ball runner blocks R1653 31. 20 for preload C1
- b) Ball runner blocks R1653 32. 20 for preload C2
- c) Ball runner blocks R1653 33. 20 for preload C3

### **Example**

### **Ball runner blocks SNS** Slimline, normal, standard height Size 35:

- a) Ball runner blocks R1622 31. 20 for preload C1
- b) Ball runner blocks R1622 32. 20 for preload C2
- c) Ball runner blocks R1622 33. 20 for preload C3

### **Example**

### **Ball runner blocks SLS** Slimline, long, standard height

Size 35:


- a) Ball runner blocks R1623 31. 20 for preload C1
- b) Ball runner blocks R1623 32. 20 for preload C2
- c) Ball runner blocks R1623 33.20 for preload C3

### **Preload**

C1/C2/C3 = in accordance with table for preload force Fpr

### Key


= Elastic deformation (µm) = Load

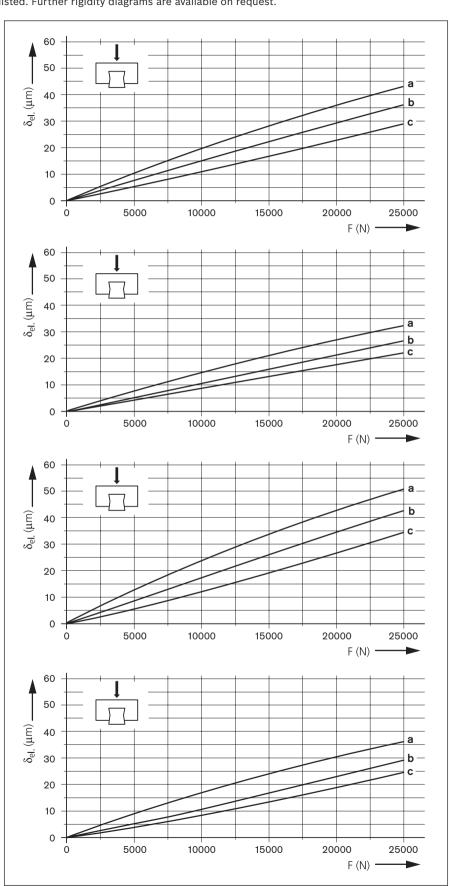

# Accuracy classes

### Accuracy classes and their tolerances

Ball rail systems are available in six accuracy classes for ball runner blocks and five for ball guide rails. For details of the available ball runner blocks and ball guide rails, see the "Material numbers" tables.

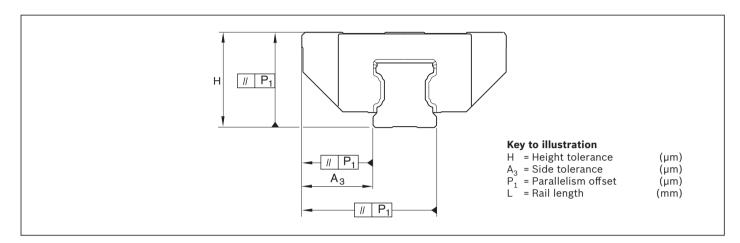

### Precision manufacturing process makes interchangeability easy

Rexroth manufactures its ball guide rails and ball runner blocks with such high precision, especially in the ball raceway zone, that each individual component element is fully interchangeable. For example, a ball runner block can be used without problems on various ball guide rails of the same size. Similarly, different ball runner blocks can also be used on one and the same ball guide rail.

	Н	$A_3$	Δ <b>H</b> , Δ <b>A</b> <sub>3</sub>
Measured in middle of runner block	For any ball runner block/ra position along the entire rai		For different ball runner blocks at same position on rail

### Ball rail system made of steel, aluminum, Resist NR and Resist NR II

Accuracy classes	Tolerances of the dimensi	ons (µm)	Max. differences of dimensions H and A <sub>3</sub> on one rail (µm)
	Н	A <sub>3</sub>	Δ <b>H</b> , Δ <b>A</b> <sub>3</sub>
N	±100	±40	30
Н	±40	±20	15
Р	±20	±10	7
XP <sup>1)</sup>	±11	±8	7
SP	±10	±7	5
UP	±5	±5	3

<sup>1)</sup> Ball runner block with accuracy class XP, ball guide rail with accuracy class SP

### Ball rail system, Resist CR, matte-silver, hard chrome plated


Accuracy classes	Tolerances of	the dimensions	(μm)		Max. differences of dimen		
		Н		$A_3$			$\Delta H$ , $\Delta A_3$
	Ball runner	Ball guide rail	Ball runner	Ball guide rail	Ball runner block/	Ball guide rail	
	block/ball		block/ball		Ball guide rail		
	guide rail		guide rail				
Н	+47	+44	± 23	+19	18		15
	-38	-39		-24			

# Accuracy classes

### Parallelism offset P<sub>1</sub> of the ball rail system in operation

Values measured at middle of runner block with ball rail systems without surface coating.

For hard chrome plated ball guide rails Resist CR, the values can increase up to 2  $\mu m$ .

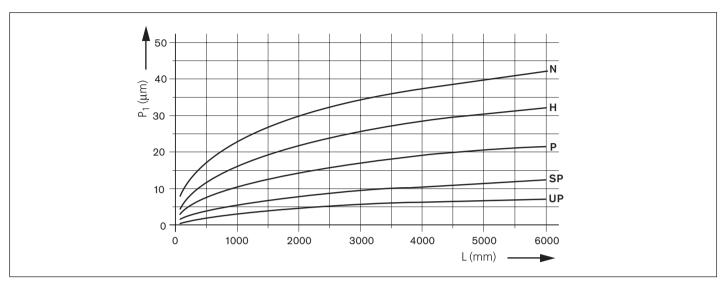

### Tolerances for combination of accuracy classes

Ball r	unner blocks		Ball guide rai	ls			
			N	Н	P	SP	UP
			(µm)	(µm)	(µm)	(µm)	(µm)
N	Tolerance of dimension H	(µm)	±100	±48	±32	± 23	±19
	Tolerance of dimension A <sub>3</sub>	(µm)	±40	±28	±22	±20	±19
	Max. diff. dimensions H and A <sub>3</sub> on one rail	(µm)	30	30	30	30	30
Н	Tolerance of dimension H	(µm)	±92	±40	±24	±15	±11
	Tolerance of dimension A <sub>3</sub>	(µm)	±32	±20	±14	±12	±11
	Max. diff. dimensions H and A <sub>3</sub> on one rail	(µm)	15	15	15	15	15
Р	Tolerance of dimension H	(µm)	±88	±36	±20	±11	±7
	Tolerance of dimension A <sub>3</sub>	(µm)	±28	±16	±10	±8	±7
	Max. diff. dimensions H and A <sub>3</sub> on one rail	(µm)	7	7	7	7	7
XP	Tolerance of dimension H	(µm)	±88	±36	±20	±11	±7
	Tolerance of dimension A <sub>3</sub>	(µm)	±28	±16	±10	±8	±7
	Max. diff. dimensions H and A <sub>3</sub> on one rail	(µm)	7	7	7	7	7
SP	Tolerance of dimension H	(µm)	±87	±35	±19	±10	±6
	Tolerance of dimension A <sub>3</sub>	(µm)	±27	±15	±9	±7	±6
	Max. diff. dimensions H and A <sub>3</sub> on one rail	(µm)	5	5	5	5	5
UP	Tolerance of dimension H	(µm)	±86	±34	±18	±9	±5
	Tolerance of dimension A <sub>3</sub>	(µm)	±26	±14	±8	±6	±5
	Max. diff. dimensions H and A <sub>3</sub> on one rail	(µm)	3	3	3	3	3

### Recommendations for combining accuracy classes

Recommended with **relatively large ball runner block distances** and long strokes:

Ball guide rail in higher accuracy class than ball runner blocks.

Recommended with **small ball runner block distances** and short strokes:

Ball runner blocks in higher accuracy class than ball guide rail.


### Sequence accuracy selection criterion

By means of perfected ball inlet and outlet zones in the ball runner blocks and the optimized pitch of the mounting holes in the ball guide rails, a very high sequence accuracy with lowest pulsation is achieved. Particularly suitable for highly precise, chipping processing, measuring technique, high-precision scanners, eroding technology etc. (See chapter Product Description High-precision Ball Runner Block BSHP made of steel, Application examples)

## Ball chain

Rexroth recommends the ball chain especially for applications where a low noise level is required.

Ball runner blocks including ball chain (1) are available as an option. The ball chain prevents the balls from colliding with each other and helps to achieve a calmer and smoother running. A lower noise level is achieved. Due to the smaller number of load-bearing balls in the ball runner block with ball chain, lower load ratings and load moments can result ("Product overview with load ratings and load moments").

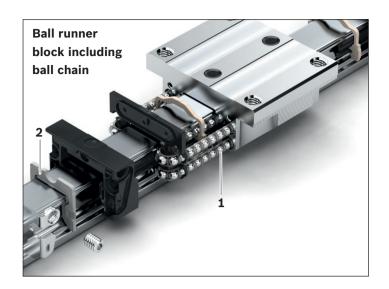

## Seals

The sealing plate on the front side (2) protects the interior of the ball runner block against dirt, chips and fluids. Additionally, it prevents the discharge of lubricant. Due to the optimized form of the sealing lips, the occurring friction is reduced to a minimum. Sealing plates are optionally available with black standard seals (SS), beige low-friction seals (LS) or green double-lip seals (DS).

### Low-friction seal (LS) (seal with very low friction)

For special requirements with regard to ease of movement and reduced lubricant application, the low-friction seal has been developed. It consists of an open-pored polyurethane foam and features only limited wiping action.

### **Standard seal (SS)** (universal sealing with good sealing effect)

For most application cases, the standard seal is suitable. It comprises of a good wiping action but also enables long relubrication intervals.


### **Double-lip seal (DS)** (sealing with very good sealing effect)


For applications in which the rail guide is heavily charged with chips, wood dust, cooling lubricants etc.,

Rexroth recommends the double-lip sealing. It comprises an excellent wiping action but a greater friction force and lower relubrication interval.

### Sealing effect and displacement resistance

The displacement resistance can be impacted by the geometry and the material. The diagram shows the effects of different sealing versions on the sealing effect and the displacement resistance.

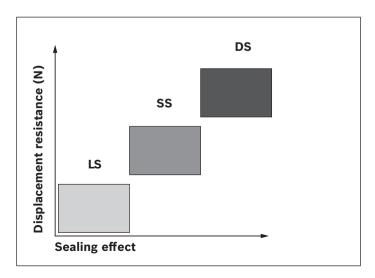



### Materials

Rexroth offers ball runner blocks made of different materials for the different requirements in the various applications.

### A Standard ball runner block made of steel

The most widely used carbon steel version.

Low-cost variant, but does not provide protection against corrosion. Is usually sufficient for general mechanical engineering.



### B High-speed ball runner block made of steel


In this variant, the steel balls are replaced by ceramic balls compared to the standard ball runner blocks made of steel. Since ceramic has a lower density than steel, the same forces result in the deflections of the ball circuits at the increased permissible travel speed. This means that even at travel speeds of up to 10 m/s, the expected service life is not limited. Load ratings and load moments are slightly reduced compared to the standard design.



### Limited corrosion resistant ball runner blocks

#### C Aluminum ball runner block

The ball runner block body consists of a wrought aluminum alloy. Balls, steel bearing plate and frontal fixing screws are made of carbon steel. The ball runner blocks have the same load rating as the standard version. As the yield point of aluminum is lower than that of steel, the maximum load capacity of the ball runner blocks is limited by  $F_{\text{max}}$  and  $M_{\text{max}}$  Most cost-effective alternative with limited corrosion protection.



### Corrosion resistant ball runner blocks

### **D** Resist NR

The ball runner block body is made of corrosion resistant material. Offers limited corrosion protection. Balls, steel bearing plate and frontal fixing screws are made of carbon steel. The ball runner blocks have the same basic load ratings and load moments as the standard version.

Rexroth recommends this version for applications requiring corrosion protection. Fast delivery.

### E Resist NR II


All parts of the ball runner block are made of corrosion resistant material. These ball runner blocks offer the greatest possible protection against corrosion with only slightly reduced load ratings and load moments.

### F Resist CR

The ball runner block body is coated with a corrosion-resistant coating, matte-silver, hard chrome plated. Balls, steel bearing plate and frontal fixing screws are made of carbon steel. The ball runner blocks have the same basic load ratings and load moments as the standard version.

Alternative if the NR version is not available.

# **Material specifications**

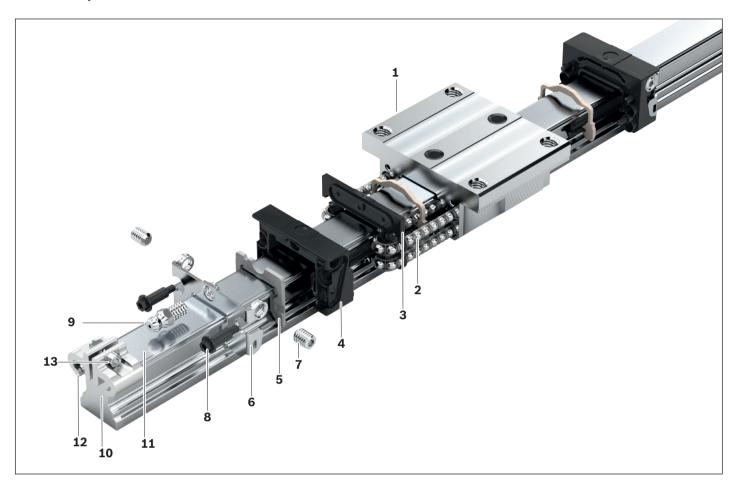

Item	Component	Ball runner blo	cks				
		Α	В	С	D	E	F
		Steel	Steel	Aluminum	Resist NR	Resist NR II	Resist CR
			(high-speed)				
1	Ball runner block body	Heat-treated	Heat-treated	Wrought	Corrosion resistant	Corrosion resistant	Heat-treated steel
		steel	steel	aluminum alloy	steel 1.4122	steel 1.4122	Chrome plated
2	Balls	Anti-friction	Si <sub>3</sub> N <sub>4</sub>	Anti-friction	Anti-friction	Corrosion resistant	Anti-friction
		bearing steel		bearing steel	bearing steel	steel 1.4112	bearing steel
3	Diversion plate	Plastic TEE-E					
4	Ball guide	Plastic strip PC	OM (PA6.6)				
5	Sealing plate	Plastic TEE-E					
6	Thread plate	Corrosion resis	tant steel 1.43	06			
7	Set screws	Corrosion resis	tant steel 1.43	01			
8	Flanged screws	Carbon steel				Corrosion resistant	Carbon steel
						steel 1.4303	
9	Lube nipple					Corrosion resistant	
						steel 1.4305	
Item	Component	Ball guide rail				·	
10	Ball guide rail	Heat-treated st	eel			Corrosion resistant	Heat-treated steel
						steel 1.4116	
11	Cover strip	Corrosion resis	tant steel 1.43	10			•
12	Strip clamp	Aluminum, ano	dized				
13	Clamping screw with nut	Corrosion resis	tant steel 1.43	01			

# Product description

#### **Characteristic features**

- ► The same high load ratings in all four main directions of loading
- Low noise level and outstanding travel behavior
- ► Excellent dynamic characteristics:

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ 

- ▶ Long-term lubrication is possible over several years
- ► Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- ▶ Lube fittings with metal threads on all sides¹)
- ► Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.
- Maximum system rigidity due to preloaded
   O-arrangement
- Optional integrated, inductive and wear-free measuring system
- ► First-class logistics unique worldwide thanks to universal interchangeability of the components within any accuracy class
- ► Attachments on the ball runner block can be mounted from above and below¹)
- Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block<sup>1)</sup>
- ▶ Wide range of accessories
- ▶ End-face fastening thread for all attachments

# **Further highlights**


- ► High rigidity in all load directions permits applications with just one runner block per rail
- ► Integrated all-round sealing
- ► High torque load capacity
- ► Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ▶ Different preload classes
- ▶ Ball runner block pre-lubricated at the factory¹)
- ► Optionally available with ball chain<sup>1)</sup>

# Corrosion protection (optional)1)

- Resist NR: Ball runner block body made of corrosion resistant steel as per DIN EN 10088
  - Resist NR II:

    Ball runner block body and ball guide rail as well as all steel parts made of corrosion resistant steel in accordance with DIN EN 10088
- Resist CR:
   Ball runner block body or ball guide rail made of steel with corrosion resistant coating, matte-silver finish, hard chrome plated

#### 1) Type-dependent

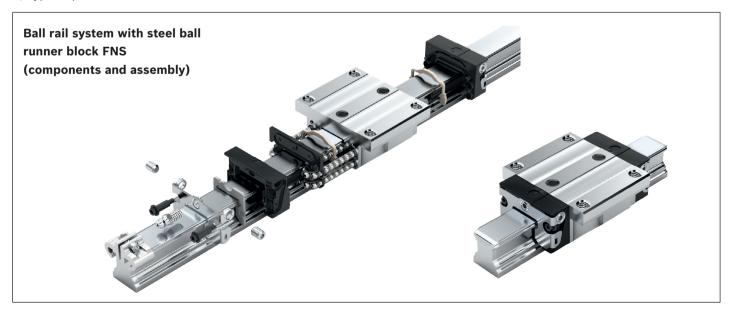

## Highlights of the ball runner blocks BSHP


- Further increased travel accuracy up to a factor of six
- Significantly reduced frictional oscillations and low friction force level, particularly under external load
- ► Maximum precision
- Selected qualities
- ► Minimum quantity preservation in the accuracy classes XP; SP; UP. (Impairment of the environment is reduced by the preserving agent)
- ▶ Patented entry zone increases the sequence accuracy
- ► All other advantages of Rexroth precision ball runner blocks integrated

# Comparison

#### Conventional ball runner blocks

If the ball runner block comprises of a conventional entry zone, this may only be designed for a specific load point.

## Entry-zone geometry for conventional ball runner blocks

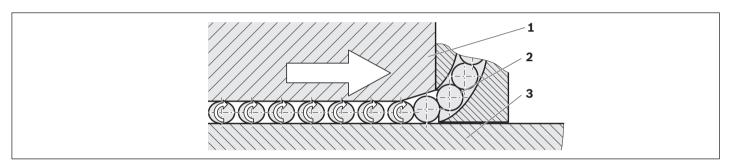

- 1) Ball runner blocks
- **2)** Ball
- 3) Ball guide rail

#### Ball entry

- ▶ The balls are guided up to the start of the entry zone via the roller deflection.
- ▶ If the distance between the ball runner block (1) and the ball guide rail (3) is smaller than the ball diameter, the ball (2) is put under load (preload) in pulses.
- ► The preload is increased in the entry zone and reaches its maximum in the load bearing zone. By doing so, the ball transmits its force from the ball runner block to the ball guide rail.
- ▶ Due to the kinematic and geometric relations, a distance between the individual balls is set.

## **Entry zone**

The conventional ball runner blocks comprise of a fix entry zone. The depth of the entry zone shall be suitable for a high load, since a fault-free ball entry is to be guaranteed under very high loads, as well.

- ▶ On the one hand, as many load-bearing balls as possible should be in the ball runner block in order to reach an ideal load-carrying capacity.
  - ⇒ Entry zone as short as possible
- ▶ On the other hand, the load during the entry of the balls should be increased as slowly as possible and thus in a harmonic manner in order to reach the maximum of the geometric travel accuracy.
  - ⇒ Entry zone which is as flat (long) as possible


There is a conflict of aims between short and long entry zones.

# Product description

# **High-precision Ball Runner Block BSHP**

#### New entry-zone geometry for ball runner block in high-precision version

The ball runner blocks in high-precision version comprise of an innovative entry zone. The steel bearing plates are not supported by the ball runner block in the end area and can therefore deform elastically. The entry zone adjusts itself individually to the current operating load of the ball runner block. I.e the balls run smoothly into the bearing zone without loading pulsations.

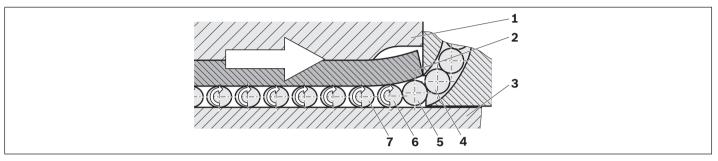

- 1) Ball runner blocks
- 2) Steel bearing plate
- 3) Ball guide rail
- 4) 7) Balls

#### **Ball entry**

- ▶ The balls (4) are guided up to the start of the entry zone via the roller deflection.
- ▶ The ball (5) can enter without load.
- ▶ The ball (6) elastically deforms the end of the steel bearing plate (2). This deformation results from the total yielding of the ball deformation and the deformation of the free ends of the steel bearing plates.
- ▶ If the distance between the steel bearing plate and the ball guide rail (3) is smaller than the ball diameter, the ball is put under load (preload) slowly and evenly.
- ▶ The preload is increased harmonically until the ball (7) has reached its maximum preload.

# Innovative solutions by Rexroth:

#### The load dependent entry zone

The functionality of the entry zone is decisive. The steel bearing plates are manufactured with such precision that they deflect by the ideal amount according to the load. Thus, the balls can enter particularly smoothly. Due to the precise manufacture of the steel bearing plates, they are only deformed by an entering ball to such an extent that the following ball can run in without load. The balls thus no longer enter the load-bearing zone through a fixed entry zone, rather transition smoothly on a tangential, ideally angled elastic line into the load-bearing zone. The smooth entry of the balls and the continuous adaptation of the entry zone to the load represent the most decisive benefits of the High-precision Ball Runner Blocks.

#### **Characteristic features**

- 1 Maximum travel accuracy
- 2 Reduced friction force oscillations
- 3 The conflict of aims is resolved

# Fluctuation of friction forces

#### **Definition**

The overall driving force of a ball runner block consist of the following components:


- 1 Ball friction
- 2 Sealing friction
- **3** Friction in the ball deflections and ball returns

In operation, the fluctuations of the friction force can be particularly disturbing.

# These fluctuations are essentially impacted by the following effect:

The balls need to be brought into the loaded load-bearing zone from the load-free zone. The harmonic entry zone and the innovative ball feed are used to reduce the fluctuations to a minimum, which means that the linear drive will also be easier to control.

#### Friction force comparison of ball runner block size 35 with an external load of 10,000 N

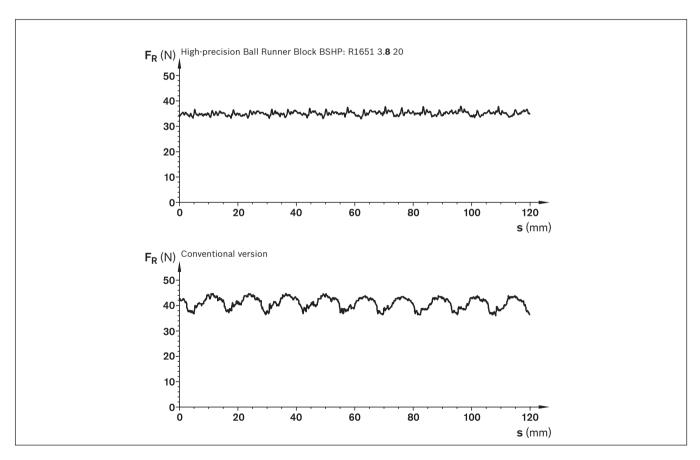

- ⇒ Reduced friction force value
- ⇒ Significantly reduced fluctuation of friction forces

# Product description

# **Travel accuracy**

#### **Definition**

42

In an ideal case, a ball runner block moves transitively in relation to the x-axis over the ball guide rail. In practice, however, deviations occur in all six degrees of freedom. The term travel accuracy describes the deviation from this ideal line.

# Six different degrees of freedom 1 Height deviation (linear deviation in Z) 2 Yaw (rotary motion around Z) 3 Side deviation (linear deviation in Y) 4 Pitching (rotary motion around Y) 5 Translation (linear movement in X) 6 Rollers (rotary motion around x)

# Causes of travel inaccuracy

The Travel inaccuracy is impacted by the following points.

- 1. Inaccurate mounting base on which the ball guide rail is mounted.
- 2. Parallelism error between the contact areas of the ball guide rail and the running tracks.
- 3. Elastic deformations of the ball guide rail by the mounting screws.
- 4. Accuracy fluctuations caused by the balls entering and exiting.

# **Potential for optimization**

With respect to 1: Contact surfaces of the ball guide rail should be produced as precisely as possible (outside of the scope of influence of Rexroth).

With respect to 2: Any deviation should be equalized by the selection of the accuracy class of the ball guide rail.

With respect to 3: Reduce the tightening torque. The tightening torque of the fastening screws has a proportional impact.

A reduction of the tightening torque decreases the compressive strain of the rail material.

⇒ Lower geometric process fluctuations

With respect to 4: The patented, innovative entry zone of Rexroth - High-precision Ball Runner Blocks reduces the speed fluctuations to a minimum.

**A** With this measure, the transferable forces and moments can be reduced.


Further potential for improvement:

- ► Use of long ball runner blocks
- ▶ Installation of additional ball runner blocks per ball guide rail.

#### The measured deviations have the following cause

A ball circulation contains a number n of supporting balls which are under load. If the ball runner block is moved into the direction of travel, via the entry zone, a new ball enters the load-bearing zone and n + 1 balls are supporting. This disturbs the internal balance of the four supporting rows of balls. The ball runner block enters a rotational movement since the balls can arbitrarily enter the supporting rows of balls. In order to restore the balance, the ball runner block is moving into a new balance position. If the ball runner block is moved further, a supporting ball exits the load-bearing zone at the ball exit. Thus, the internal balance of the four supporting rows of balls is disturbed again and the ball runner block enters a rotational movement. This effect can be clearly seen in the diagram on the next page.


As it has been verified in practical applications, the period of short-wave inaccuracies roughly corresponds to twice the ball diameter. The remaining long-wave deviation is caused by the described causes 1, 2 and 3 (inaccurate support, parallelism errors and elastic deformation of the ball guide rail due to the mounting screws).

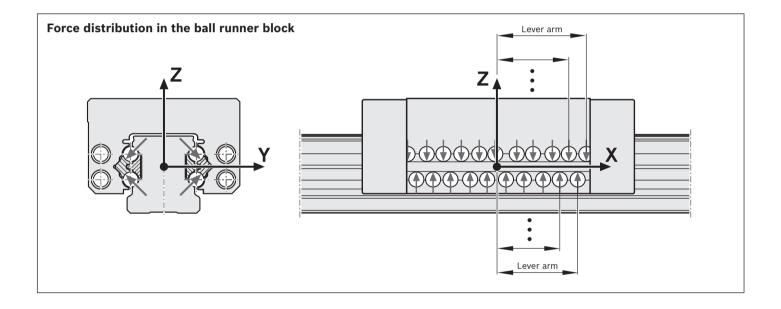

# Product description

# Direct comparison of the sequence accuracy of two ball runner blocks


It can be clearly seen that the short-wave inaccuracy (dashed) can be significantly reduced by the new innovative design of the entry zone (continuous line).

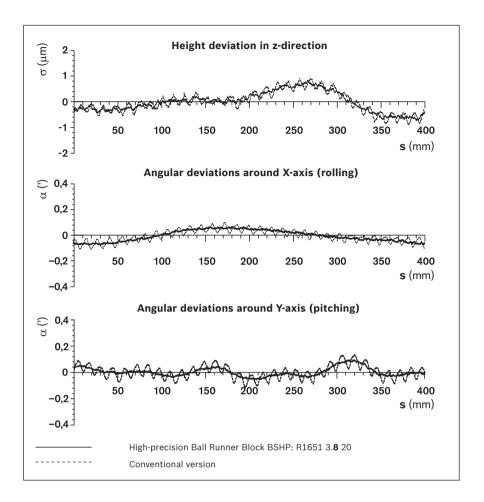

# Application examples


# Rexroth high-precision ball runner blocks are particularly suited for the following applications:

#### Measuring

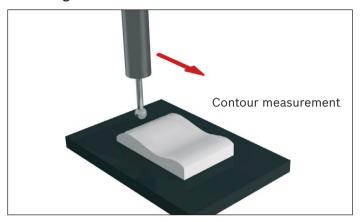


3D Coordinate Measuring Machine

# Milling

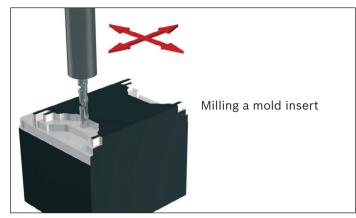


Hard milling

# Grinding

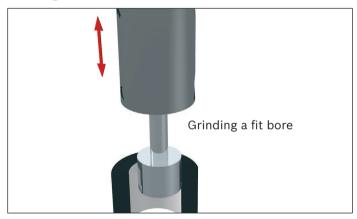


Internal cylindrical grinding

# **Turning**

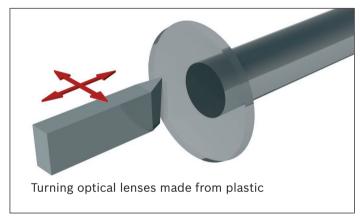


High-precision turning

# **Electrical discharge machining**

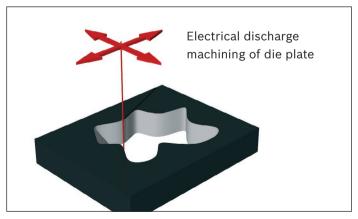

Wire electrical discharge machining


#### Microelectronics

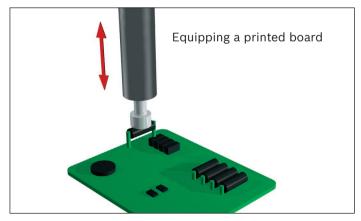

Printed board mounting machine

These are only a few examples. Naturally, other applications can be realized. Feel free to ask any questions that you may have. We have an appropriate solution.

# Overview of formats

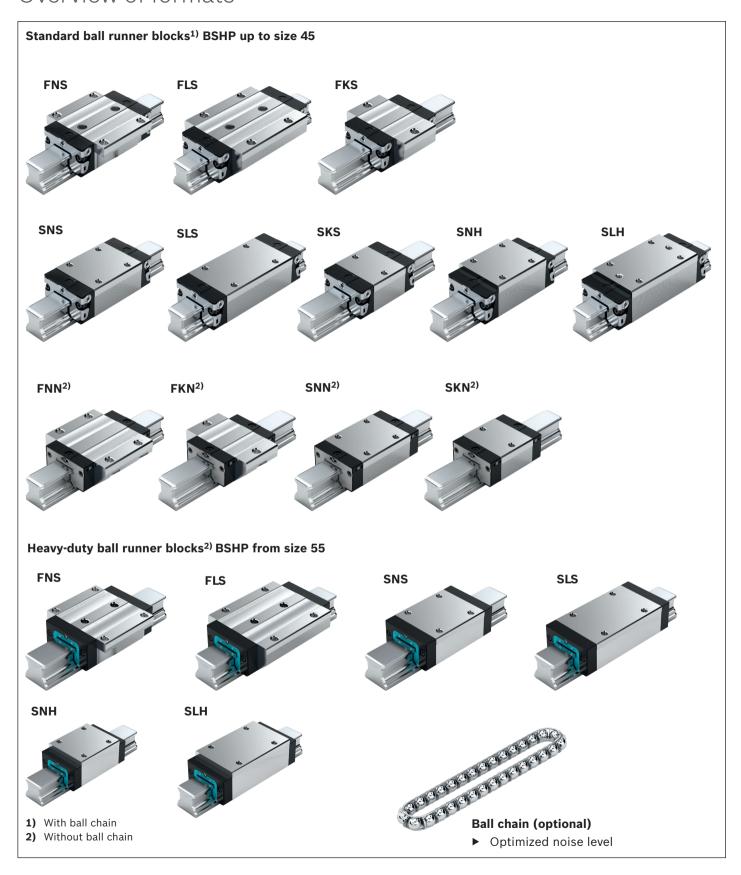

# Order example

# Ordering ball runner blocks

The material number is composed of the code numbers for the individual options. Each option (highlighted in gray) is coded in a material number digit (on a white background). The following ordering example applies to all ball runner blocks.

# Explanation of option "Ball runner blocks with size"

The design style of the ball runner block – in this example, a standard ball runner block FNS – is specified on the respective product page.

Coding in the part number:



# Order example

Options:

- Ball runner blocks FNS
- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number: R1651 713 20

Size	Ball runner	Preloa	d class			Accura	cy clas	SS				Seal w	ith ball	runne	r blocks		
	block with I											withou	t ball c	hain	with ba	ıll chair	1
	'	C0	C1	C2	C3	N	Н	P	ΧP	SP	UP	SS	LS1)	DS	SS	LS1)	DS
15	R1651 1	9				4	3		-	-	-	20	21	-	22	23	-
			1			4	3	- 1	8	1	9		21	_	22	23	-
				2		_	3	2	8	1	9		21	_	22	23	-
					3	-	-	-	8	1	9		21	_	22	23	-
20	R1651 8	9				4	3		-	-	_	20	21	_	22	23	_
			1			4	3	- 1	8	1	9		21	2Z		23	2Y
				2		_	3	2	8	1	9	20	21	2Z	22	23	2Y
					3		-	-	8	1	9	20	21	2Z	22	23	2Y
25	R1651 2	9				4	3	-	-	-	-	20	21	-	22	23	-
			1			4	3		8	1	9	20	21	2Z	22	23	2Y
				2		_	3	2	8	1	9		21	2Z	22	23	2Y
					3		_	-	8	1	9		21	2Z	22	23	2Y
30	R1651 7	9				4	3		-	-	-	.20	21	-	22	23	-
	ļ-		1			4	3		8	1	9	1 1	21	2Z	22	23	2Y
				2		_	3		8	1	9		21	2Z	22	23	2Y
					3	_	-	-	8	1	9		21	2Z		23	2Y
35	R1651 3	9				4	3		-	_	_	20	21	_	22	23	-
			1			4	3	-	8	1	9		21	2Z		23	2Y
				2		_	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	_	-	-	8	1	9		21	2Z	22	23	2Y
45	R1651 4	9				4	3	-	-	_	-	20	-	-	22	-	_
			1			4	3	2	8	1	9	1	_	2Z	22	-	2Y
				2		-	3	2	8	1	9	20	-	2Z	22	-	2Y
					3	_	-	-	8	1	9	20	-	2Z	22	-	2Y
e.g.	R1651 7		1				3					20					

## Preload classes

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload C3 = High preload

#### Seals

SS = Standard seal

LS = Low-friction seal

Options and part numbers

DS = Double-lip seal

#### Kev

gray numbers

No Preferred Variant / Combination

(partially longer delivery times)

#### Definition of the format of ball runner blocks

Criterion	Designation	Code (exa	mple)	
		F	N	S
Width	Flange <b>(F)</b>	F		
	Slimline (S)	S		
	Wide (B)	В		
	Compact (C)	С		
Length	Normal (N)		N	
	Long (L)		L	
	Short (K)		K	
Height	Standard height (S)			S
	High (H)			Н
	Low (N)			N

# FNS - Flanged, normal, standard height R1651 ... 2.



# **Dynamic characteristics**

$$\begin{split} &\text{Travel speed:} & \quad \text{$v_{max}$ = 5 m/s$} \\ &\text{Acceleration:} & \quad a_{max} = 500 \text{ m/s}^2 \\ &\text{(If $F_{comb}$ > 2.8 \cdot $F_{pr}$ : $a_{max}$ = 50 m/s}^2) \end{split}$$

## **Note on lubrication**

▶ Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

#### **Options and material numbers**

48

Size	Ball runner	Preload	class			Accura	cy clas	S				Seals o	n ball	runner	blocks		
	blocks with size											withou	t ball c	hain	with ba	ıll chain	1
		C0	C1	C2	C3	N	Н	Р	XP	SP	UP	SS	LS1)	DS	SS	LS <sup>1)</sup>	DS
15	R1651 1	9		İ		4	3	-	-	-	-	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
20	R1651 8	9		İ		4	3	-	-1	-	_	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
25	R1651 2	9				4	3	-	-	-	_	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	_	-	-	8	1	9	20	21	2Z	22	23	2Y
30	R1651 7	9				4	3	-	-1	-	-	20	21	_	22	23	-
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
35	R1651 3	9				4	3	-	-	-1	_	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
45	R1651 4	9				4	3	-	-	-	-	20	-	_	22	-	_
			1			4	3	2	8	1	9	20	-	2Z	22	-	2Y
				2		-	3	2	8	1	9	20	-	2Z	22	-	2Y
					3	-	-	-	8	1	9	20	_	2Z	22	_	2Y
E.g.:	R1651 7		1				3					20					

1) Only for accuracy classes N and H and for XP in preload class C1.

# Order example

#### Options:

▶ Ball runner blocks FNS

- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1651 713 20

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

SS = Standard seal

LS = Low-friction seal


DS = Double-lip seal

#### Key

gray numbers

= No preferred variant /

combination

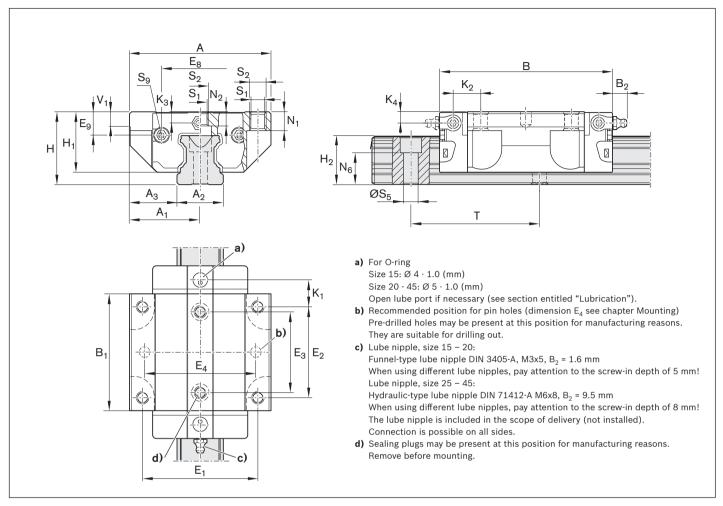


Size	Dimer	sions (	(mm)																
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	$\mathbf{E_2}$	$\mathbf{E_3}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{(2)}$	$K_1$	$K_2$	K <sub>3</sub>	$K_4$
15	47	23.5	15	16.0	58.2	39.2	38	30	26	24.55	6.70	24	19.90	16.30	16.20	8.00	9.6	3.20	3.20
20	63	31.5	20	21.5	75.0	49.6	53	40	35	32.50	7.30	30	25.35	20.75	20.55	11.80	11.8	3.35	3.35
25	70	35.0	23	23.5	86.2	57.8	57	45	40	38.30	11.50	36	29.90	24.45	24.25	12.45	13.6	5.50	5.50
30	90	45.0	28	31.0	97.7	67.4	72	52	44	48.40	14.60	42	35.35	28.55	28.35	14.00	15.7	6.05	6.05
35	100	50.0	34	33.0	110.5	77.0	82	62	52	58.00	17.35	48	40.40	32.15	31.85	14.50	16.0	6.90	6.90
45	120	60.0	45	37.5	137.6	97.0	100	80	60	69.80	20.90	60	50.30	40.15	39.85	17.30	19.3	8.20	8.20

Size	Dime	nsions	(mm)								Load capa	cities <sup>3)</sup>	Load mo	ments <sup>3)</sup>	(Nm)	
										(kg)	→ <u></u>	<u>†</u> }_←				
	N <sub>1</sub>	$N_2$	$N_6^{\pm 0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	Co	M <sub>t</sub>	$M_{t0}$	$M_L$	$M_{L0}$
15	5.2	4.40	10.3	4.3	M5	4.5	M2.5x3.5	60	5.0	0.20	9860	12700	95	120	68	87
20	7.7	5.20	13.2	5.3	M6	6.0	M3x5	60	6.0	0.45	23400	29800	300	380	200	260
25	9.3	7.00	15.2	6.7	M8	7.0	M3x5	60	7.5	0.65	28600	35900	410	510	290	360
30	11.0	7.90	17.0	8.5	M10	9.0	М3х5	80	7.0	1.10	36500	48100	630	830	440	580
35	12.0	10.15	20.5	8.5	M10	9.0	М3х5	80	8.0	1.60	51800	80900	1110	1740	720	1130
45	15.0	12.40	23.5	10.4	M12	14.0	M4x7	105	10.0	3.00	86400	132000	2330	3560	1540	2350

- $\textbf{1)} \ \ \mathsf{Dimension} \ \mathsf{H}_2 \ \mathsf{with} \ \mathsf{cover} \ \mathsf{strip}$
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🕫 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_1$  and  $\mathbf{M}_1$  by 1.26 according to the table.

# FLS - Flanged, long, standard height R1653 ... 2.

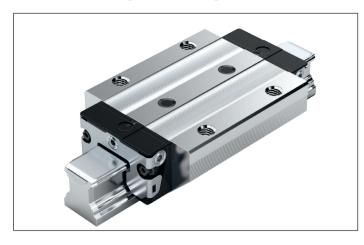

# **Dynamic characteristics**

$$\begin{split} &\text{Travel speed:} & \quad \text{$v_{max}$ = 5 m/s$} \\ &\text{Acceleration:} & \quad a_{max} = 500 \text{ m/s}^2 \\ &\text{(If $F_{comb}$ > 2.8 \cdot $F_{pr}$ : $a_{max}$ = 50 m/s}^2) \end{split}$$

## Note on lubrication

Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

#### **Options and material numbers**

Size	Ball runner	Preload	class			Accura	cy class					Seals o	n ball r	unner	blocks		
	blocks with size											withou	t ball c	hain	with ba	II chain	
		C0	C1	C2	C3	N	Н	P	XP	SP	UP	SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS
15	R1653 1	9				4	3	-1	-1	-	-	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
20	R1653 8	9				4	3	-1	-1	-	-	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
25	R1653 2	9				4	3	-	-	-	-	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
30	R1653 7	9				4	3	-	-	-	-	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
35	R1653 3	9				4	3	-	-	-	-	20	21	_	22	23	_
			1			4	3	2	8	1	9	20	21	2Z	22	23	2Y
				2		-	3	2	8	1	9	20	21	2Z	22	23	2Y
					3	-	-	-	8	1	9	20	21	2Z	22	23	2Y
45	R1653 4	9				4	3	-	-	-	-	20	-	_	22	-	_
			1			4	3	2	8	1	9		_	2Z	22	-	2Y
				2		-	3	2	8	1	9	20	-	2Z	22	-	2Y
					3	-	-	-	8	1	9	20	_	2Z	22	-	2Y
E.g.:	R1653 7		1				3					20					

1) Only for accuracy classes N and H and for XP in preload class C1.

#### Order example

# Options:

► Ball runner blocks FLS

- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1653 713 20

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

SS = Standard seal


LS = Low-friction seal

DS = Double-lip seal

#### Key

gray numbers

No preferred variant / combination

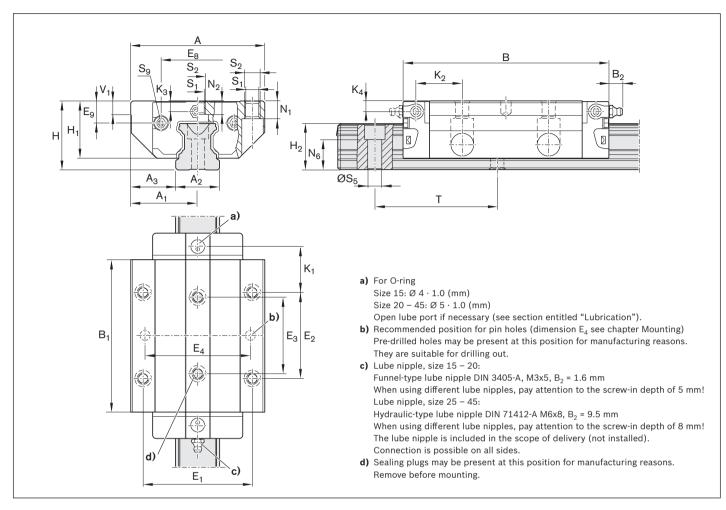


Size	Dimer	nsions	(mm	1)															
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$E_2$	$E_3$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
15	47	23.5	15	16.0	72.6	53.6	38	30	26	24.55	6.70	24	19.90	16.30	16.20	15.20	16.80	3.20	3.20
20	63	31.5	20	21.5	91.0	65.6	53	40	35	32.50	7.30	30	25.35	20.75	20.55	19.80	19.80	3.35	3.35
25	70	35.0	23	23.5	107.9	79.5	57	45	40	38.30	11.50	36	29.90	24.45	24.25	23.30	24.45	5.50	5.50
30	90	45.0	28	31.0	119.7	89.4	72	52	44	48.40	14.60	42	35.35	28.55	28.35	25.00	26.70	6.05	6.05
35	100	50.0	34	33.0	139.0	105.5	82	62	52	58.00	17.35	48	40.40	32.15	31.85	28.75	30.25	6.90	6.90
45	120	60.0	45	37.5	174.1	133.5	100	80	60	69.80	20.90	60	50.30	40.15	39.85	35.50	37.50	8.20	8.20

Size	Dimen	sions (r	mm)							Mass	Load capa	cities <sup>3)</sup>	Load mo	ments <sup>3)</sup>	(Nm)	
										(kg)	(N) →	<u>†</u> }_←	<u> </u>			
	N <sub>1</sub>	$N_2$	N <sub>6</sub> <sup>±0.5</sup>	S <sub>1</sub>	$S_2$	S <sub>5</sub>	S <sub>9</sub>	Т	$V_1$	m	С	C <sub>0</sub>	M <sub>t</sub>	M <sub>to</sub>	ML	M <sub>LO</sub>
15	5.2	4.40	10.3	4.3	M5	4.5	M2.5x3.5	60	5.0	0.30	12800	18400	120	180	120	180
20	7.7	5.20	13.2	5.3	M6	6.0	M3x5	60	6.0	0.55	29600	41800	380	540	340	490
25	9.3	7.00	15.2	6.7	M8	7.0	M3x5	60	7.5	0.90	37300	52500	530	750	530	740
30	11.0	7.90	17.0	8.5	M10	9.0	M3x5	80	7.0	1.50	46000	66900	800	1160	740	1080
35	12.0	10.15	20.5	8.5	M10	9.0	M3x5	80	8.0	2.25	66700	116000	1440	2500	1290	2240
45	15.0	12.40	23.5	10.4	M12	14.0	M4x7	105	10.0	4.30	111000	190000	3010	5120	2730	4660

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🕫 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_1$  and  $\mathbf{M}_1$  by 1.26 according to the table.

# FKS - flange, short, standard height R1665 ... 2.

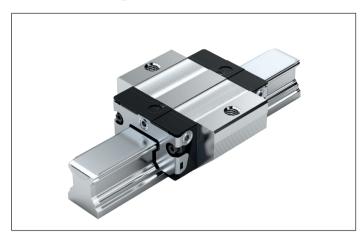

# **Dynamic characteristics**

$$\begin{split} & \text{Travel speed:} & \quad \text{$v_{max}$ = 5 m/s$} \\ & \text{Acceleration:} & \quad a_{max} = 500 \text{ m/s}^2 \\ & (\text{If $F_{comb}$} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2) \end{split}$$

## Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks	Preload class		Accuracy cla	ISS	Seals o	n ball rı	ınner b	locks	'	
	with size					withou	t ball ch	ain	with bal	chain	
		CO	C1	N	Н	SS	LS	DS	SS	LS	DS
15	R1665 1	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
20	R1665 8	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
25	R1665 2	9		4	3	20	21	_	22	23	
			1	4	3	20	21	2Z	22	23	2Y
30	R1665 7	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
35	R1665 3	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
E.g.:	R1665 7		1		3	20				·	

# Order example

Options:

- ▶ Ball runner blocks FKS
- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1665 713 20

## **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

## Seals

SS = Standard seal


LS = Low-friction seal

DS = Double-lip seal

## Key

gray numbers

No preferred variant / combination

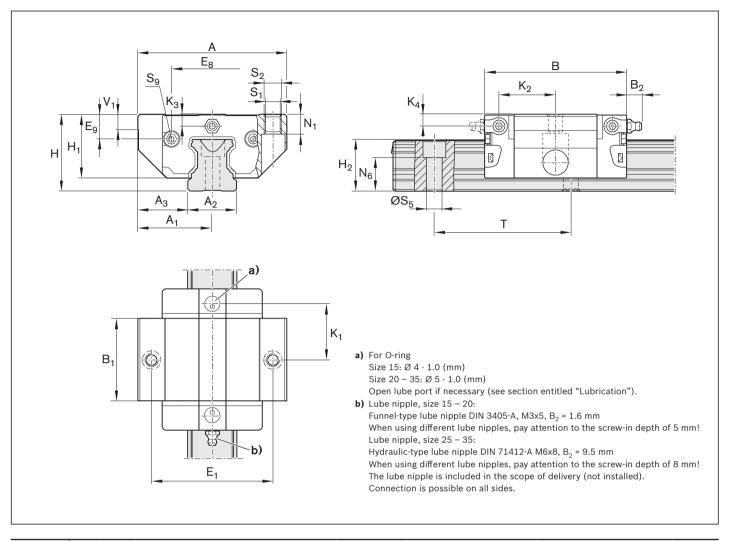


Size	Dimen	sions (r	nm)														
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{2)}$	K <sub>1</sub>	K <sub>2</sub>	K <sub>3</sub>	K <sub>4</sub>
15	47	23.5	15	16.0	44.7	25.7	38	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	63	31.5	20	21.5	57.3	31.9	53	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	70	35.0	23	23.5	67.0	38.6	57	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	90	45.0	28	31.0	75.3	45.0	72	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	100	50.0	34	33.0	84.9	51.4	82	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimensi	ions (mm	1)						Mass	Load capac	ities <sup>3)</sup>	Load mo	ments <sup>3)</sup>	(Nm)	
									(kg)	(N)				_	_
										. ↓ 1					
										→└□					
	N <sub>1</sub>	$N_6^{\pm 0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	Co	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	$M_{L0}$
15	5.2	10.3	4.3	M5	4.5	M2.5x3.5	60	5.0	0.15	6720	7340	65	71	29	32
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.30	15400	16500	200	210	83	89
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.50	19800	21200	280	300	130	140
30	11.0	17.0	8.5	M10	9.0	M3x5	80	7.0	0.80	25600	28900	440	500	200	230
35	12.0	20.5	8.5	M10	9.0	M3x5	80	8.0	1.20	36600	49300	790	1060	340	460

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain. Each in @ 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_{\mathrm{t}}$  and  $\mathbf{M}_{\mathrm{L}}$  by 1.26 according to the table.

# SNS - Slimline, normal, standard height R1622 ... 2.

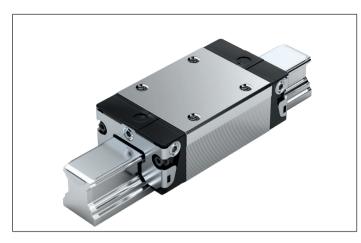

# **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

## Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

#### **Options and material numbers**

Size	Ball runner	Preload o	class			Accuracy	class			Seals on	ball runi	ner bl	ocks		
	blocks with size									without	ball chair	n	with ball	chain	
		CO	C1	C2	C3	N	н	P	XP	SS	LS <sup>1)</sup>	DS	SS	LS1)	DS
15	R1622 1	9				4	3	-1	_	20	21	-	22	23	
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
20	R1622 8	9				4	3	-	_	20	21	-	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
25	R1622 2	9				4	3	-	_	20	21	-	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
30	R1622 7	9				4	3	-	_	20	21	-	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
35	R1622 3	9				4	3	-	-	20	21	-	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
45	R1622 4	9				4	3	-	-	20	-	_	22	-	_
			1			4	3	2	8	20	-	2Z	22	-	2Y
				2		-	3	2	8	20	-	2Z	22	-	2Y
					3	-	-	-	8	20	-	2Z	22	-	2Y
E.g.:	R1622 7		1				3			20					

1) Only for accuracy classes N and H and for XP in preload class C1.

#### Order example

#### Options:

- ► Ball runner blocks SNS
- ► Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1622 713 20

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

SS = Standard seal


LS = Low-friction seal

DS = Double-lip seal

#### Key

gray numbers

= No preferred variant / combination

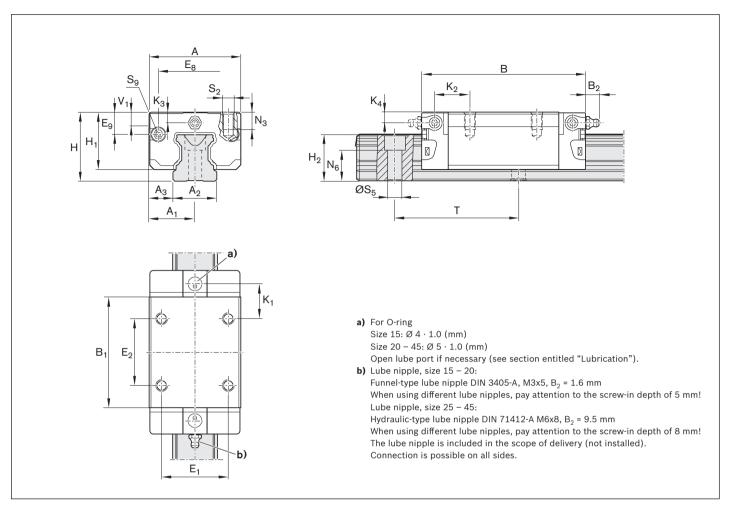


Size	Dimer	nsion	s (mr	n)														
	Α	$A_1$	$\mathbf{A_2}$	$A_3$	B <sup>+0.5</sup>	$B_1$	E,	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
15	34	17	15	9.5	58.2	39.2	26	26	24.55	6.70	24	19.90	16.30	16.20	10.00	11.60	3.20	3.20
20	44	22	20	12.0	75.0	49.6	32	36	32.50	7.30	30	25.35	20.75	20.55	13.80	13.80	3.35	3.35
25	48	24	23	12.5	86.2	57.8	35	35	38.30	11.50	36	29.90	24.45	24.25	17.45	18.60	5.50	5.50
30	60	30	28	16.0	97.7	67.4	40	40	48.40	14.60	42	35.35	28.55	28.35	20.00	21.70	6.05	6.05
35	70	35	34	18.0	110.5	77.0	50	50	58.00	17.35	48	40.40	32.15	31.85	20.50	22.00	6.90	6.90
45	86	43	45	20.5	137.6	97.0	60	60	69.80	20.90	60	50.30	40.15	39.85	27.30	29.30	8.20	8.20

Size	Dimensi	ons (mm	1)					Mass (kg)	Load capac	ities <sup>3)</sup>	Load mo	ments <sup>3)</sup>	(Nm)	
								(Kg)	→ <u></u>	<u>†</u> }_←		]		
	N <sub>3</sub>	$N_6^{\pm 0.5}$	$S_2$	S <sub>5</sub>	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	C <sub>0</sub>	M <sub>t</sub>	$M_{to}$	ML	M <sub>LO</sub>
15	6.0	10.3	M4	4.5	M2.5x3.5	60	5.0	0.15	9860	12700	95	120	68	87
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.35	23400	29800	300	380	200	260
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.50	28600	35900	410	510	290	360
30	12.0	17.0	M8	9.0	М3х5	80	7.0	0.85	36500	48100	630	830	440	580
35	13.0	20.5	M8	9.0	M3x5	80	8.0	1.25	51800	80900	1110	1740	720	1130
45	18.0	23.5	M10	14.0	M4x7	105	10.0	2.40	86400	132000	2330	3560	1540	2350

- 1) Dimension  $H_2$  with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain # 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_{\mathrm{t}}$  and  $\mathbf{M}_{\mathrm{L}}$  by 1.26 according to the table.

# SLS - Slimline, long, standard height R1623 ... 2.

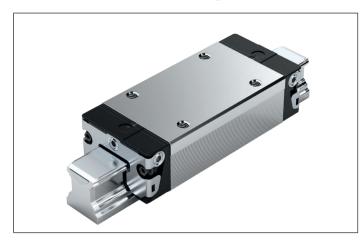

# **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 and size 65 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

#### **Options and material numbers**

Size	Ball runner	Preload	class			Accurac	y class			Seals o	n ball ru	nner bl	ocks		
	blocks with size									without	ball cha	ain	with bal	l chain	
		C0	C1	C2	C3	N	H	Р	XP	SS	LS1)	DS	SS	LS1)	DS
15	R1623 1	9		Ì		4	3	_	_	20	21	_	22	23	
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
20	R1623 8	9				4	3	_	_	20	21	_	22	23	_
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		_	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
25	R1623 2	9				4	3	-	-	20	21	_	22	23	_
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8		21	2Z	22	23	2Y
30	R1623 7	9				4	3	-	_	20	21	_	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
35	R1623 3	9				4	3	-	_	20	21	_	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
45	R1623 4	9				4	3	-	_	20	-	_	22	-	-
			1			4	3	2	8		-	2Z	22	-	2Y
				2		_	3	2	8		-	2Z	22	-	2Y
					3	_	-	_	8	20	_	2Z	22	-	2Y
E.g.:	R1623 7		1				3			20	·				

1) Only for accuracy classes N and H and for XP in preload class C1.

# Order example

#### Options:

▶ Ball runner blocks SLS

- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number: R1623 713 20

**Preload classes** 

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload C3 = High preload Seals

SS = Standard seal


LS = Low-friction seal

DS = Double-lip seal

#### Key

gray numbers

No preferred variant / combination

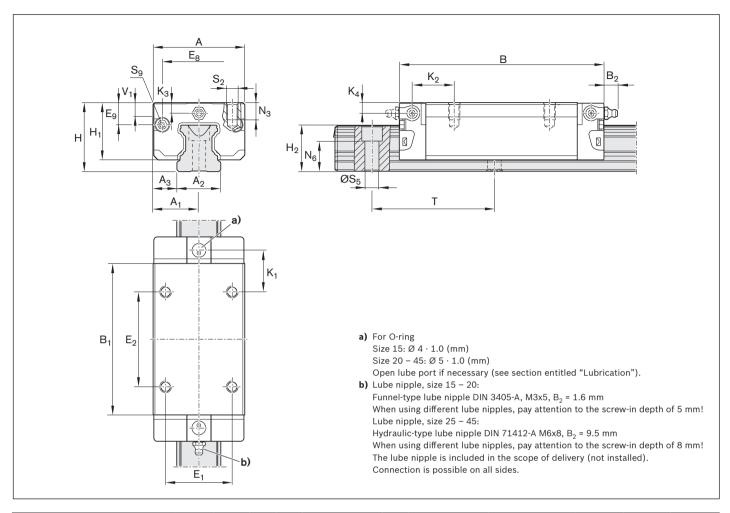

Size	Dime	nsion	s (mm	1)												'		
	Α	$A_1$	$\mathbf{A}_{2}$	$A_3$	B <sup>+0.5</sup>	$B_1$	E,	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
15	34	17	15	9.5	72.6	53.6	26	26	24.55	6.70	24	19.90	16.30	16.20	17.20	18.80	3.20	3.20
20	44	22	20	12.0	91.0	65.6	32	50	32.50	7.30	30	25.35	20.75	20.55	14.80	14.80	3.35	3.35
25	48	24	23	12.5	107.9	79.5	35	50	38.30	11.50	36	29.90	24.45	24.25	20.80	21.95	5.50	5.50
30	60	30	28	16.0	119.7	89.4	40	60	48.40	14.60	42	35.35	28.55	28.35	21.00	22.70	6.05	6.05
35	70	35	34	18.0	139.0	105.5	50	72	58.00	17.35	48	40.40	32.15	31.85	23.75	25.25	6.90	6.90
45	86	43	45	20.5	174.1	133.5	60	80	69.80	20.90	60	50.30	40.15	39.85	35.50	37.50	8.20	8.20

Size	Dimensio	ns (mm)						Mass (kg)	Load capaci	ties <sup>3)</sup> (N)	Load mo	ments <sup>3)</sup>	(Nm)	
									→	<u>†</u> -				
	N <sub>3</sub>	$N_6^{\pm 0.5}$	$S_2$	S <sub>5</sub>	S <sub>9</sub>	Т	$V_1$	m	С	$C_0$	M <sub>t</sub>	$M_{to}$	ML	M <sub>LO</sub>
15	6.0	10.3	M4	4.5	M2.5x3.5	60	5.0	0.20	12800	18400	120	180	120	180
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.45	29600	41800	380	540	340	490
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.65	37300	52500	530	750	530	740
30	12.0	17.0	M8	9.0	M3x5	80	7.0	1.10	46000	66900	800	1160	740	1080
35	13.0	20.5	M8	9.0	M3x5	80	8.0	1.70	66700	116000	1440	2500	1290	2240
45	18.0	23.5	M10	14.0	M4x7	105	10.0	3.20	111000	190000	3010	5120	2730	4660

- 1) Dimension  $H_2$  with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🕫 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_1$  and  $\mathbf{M}_1$  by 1.26 according to the table.

# SKS - Slimline, short, standard height R1666 ... 2.



# **Dynamic characteristics**

$$\begin{split} & \text{Travel speed:} & \quad \text{$v_{max}$ = 5 m/s$} \\ & \text{Acceleration:} & \quad a_{max} = 500 \text{ m/s}^2 \\ & (\text{If $F_{comb}$} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2) \end{split}$$

#### Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks	Preload class	s	Accuracy cla	ass	Seals or	n ball rui	nner blo	cks		
	with size					without	ball cha	in	with bal	l chain	
		C0	C1	N	н	SS	LS	DS	SS	LS	DS
15	R1666 1	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
20	R1666 8	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
25	R1666 2	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
30	R1666 7	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
35	R1666 3	9		4	3	20	21	_	22	23	_
			1	4	3	20	21	2Z	22	23	2Y
E.g.:	R1666 7		1		3	20					

# Order example

Options:

- ▶ Ball runner block SKS
- ▶ Size 30
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1666 713 20

#### **Preload classes**

C0 = Without preload (clearance) C1 = Moderate preload


#### Seals

SS = Standard seal LS = Low-friction seal DS = Double-lip seal

#### Key

gray numbers

 No preferred variant / combination
 (partially longer delivery times)

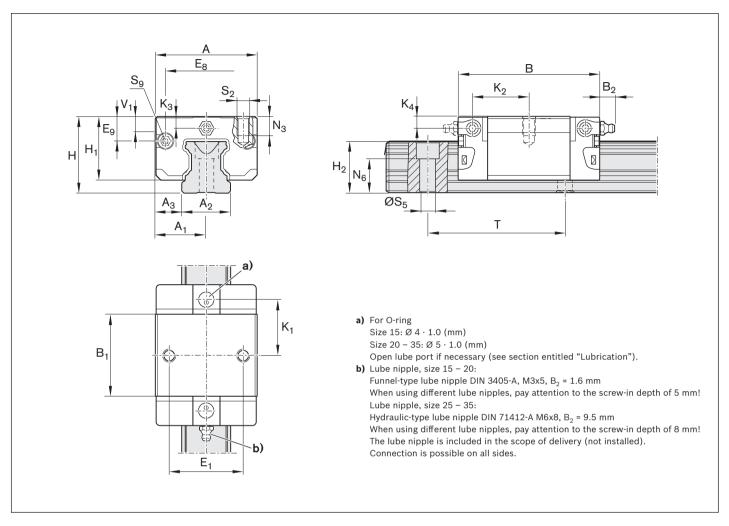

Size	Dimens	ions (r	nm)														
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	$H_2^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
15	34	17	15	9.5	44.7	25.7	26	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	44	22	20	12.0	57.3	31.9	32	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	48	24	23	12.5	67.0	38.6	35	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	60	30	28	16.0	75.3	45.0	40	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	70	35	34	18.0	84.9	51.4	50	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimensio	ns (mm)						Mass (kg)	Load capaci	ties <sup>3)</sup> (N)	Load mo	ments <sup>3)</sup>	(Nm)	
									<b>↓ 1</b>					
	N <sub>3</sub>	$N_6^{\pm 0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	$V_1$	m	С	Co	$M_t$	$M_{t0}$	ML	$M_{L0}$
15	6.0	10.3	M4	4.5	M2.5x3.5	60	5.0	0.10	6720	7340	65	71	29	32
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.25	15400	16500	200	210	83	89
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.35	19800	21200	280	300	130	140
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.60	25600	28900	440	500	200	230
35	13.0	20.5	M8	9.0	M3x5	80	8.0	0.90	36600	49300	790	1060	340	460

- 1) Dimension  $H_2$  with cover strip
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain # 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_{\mathrm{t}}$  and  $\mathbf{M}_{\mathrm{L}}$  by 1.26 according to the table.

# SNH - Slimline, normal, high R1621 ... 2.



# **Dynamic characteristics**

 $v_{max} = 5 \text{ m/s}$ Travel speed:  $a_{max} = 500 \text{ m/s}^2$ Acceleration: (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

#### Options and material numbers

Size	Ball runner	Prelo	ad cla	ISS		Accuracy	/ class			Seals on	ball run	ner blo	cks		
	blocks with size									without	ball chai	in	with ball	chain	
		C0	C1	C2	C3	N	н	Р	XP	SS	LS1)	DS	SS	LS <sup>1)</sup>	DS
15	R1621 1	9				4	3	-	_	20	21	_	22	23	_
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	_	8	20	21	2Z	22	23	2Y
25	R1621 2	9				4	3	-	_	20	21	_	22	23	_
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
30	R1621 7	9				4	3	-	_	20	21	_	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
35	R1621 3	9				4	3	-	_	20	21	_	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	-	8	20	21	2Z	22	23	2Y
45	R1621 4	9				4	3	-	_	20	_	_	22	-	_
			1			4	3	2	8	20	_	2Z	22	-	2Y
				2		-	3	2	8	20	-	2Z	22	-	2Y
					3	-	-	-	8	20	-	2Z	22	-	2Y
E.g.:	R1621 7		1				3			20					

<sup>1)</sup> Only for accuracy classes N and H and for XP in preload class C1.

#### Order example

Options:

- ► Ball runner blocks SNH
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1621 713 20

#### Preload classes

C0 = Without preload (clearance) C1 = Moderate preload

C2 = Average preload

C3 = High preload


#### Seals

SS = Standard seal LS = Low-friction seal

DS = Double-lip seal

# Key

No preferred variant / combination

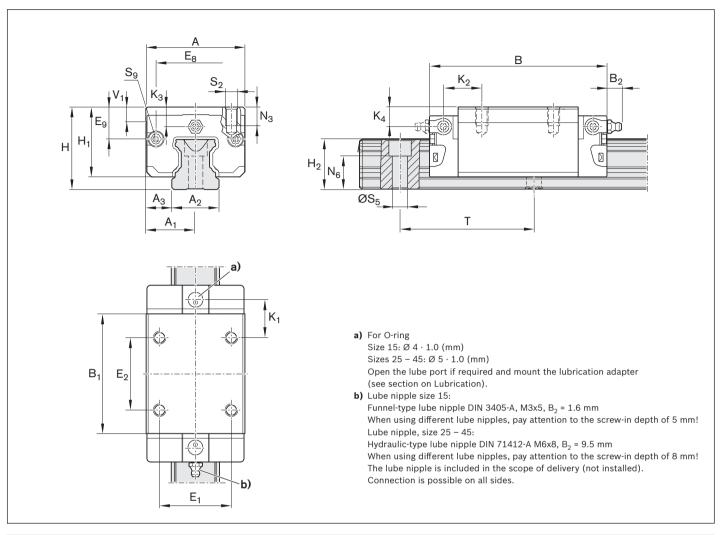


Size	Dimer	sion	s (mm	1)														
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{2)}$	$K_1$	$K_2$	K <sub>3</sub>	$K_4$
15	34	17	15	9.5	58.2	39.2	26	26	24.55	10.70	28	23.90	16.30	16.20	10.00	11.60	7.20	7.20
25	48	24	23	12.5	86.2	57.8	35	35	38.30	15.50	40	33.90	24.45	24.25	17.45	18.60	9.50	9.50
30	60	30	28	16.0	97.7	67.4	40	40	48.40	17.60	45	38.35	28.55	28.35	20.00	21.70	9.05	9.05
35	70	35	34	18.0	110.5	77.0	50	50	58.00	24.35	55	47.40	32.15	31.85	20.50	22.00	13.90	13.90
45	86	43	45	20.5	137.6	97.0	60	60	69.80	30.90	70	60.30	40.15	39.85	27.30	29.30	18.20	18.20

Size	Dimens	ions (mn	n)				Ì	Mass	Load capa	cities <sup>3)</sup> (N)	Load mo	ments <sup>3)</sup>	(Nm)	
								(kg)					ı	
										<u>†</u>				
									<b>→</b> _[	<b>∵</b>		Ţ		
	N <sub>3</sub>	$N_6^{\pm0.5}$	$S_2$	S <sub>5</sub>	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	C <sub>0</sub>	$M_t$	$M_{t0}$	$M_L$	$M_{L0}$
15	6.0	10.3	M4	4.5	M2.5x3.5	60	5.0	0.20	9860	12700	95	120	68	87
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.60	28600	35900	410	510	290	360
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.95	36500	48100	630	830	440	580
35	13.0	20.5	M8	9.0	M3x5	80	8.0	1.55	51800	80900	1110	1740	720	1130
45	18.0	23.5	M10	14.0	M4x7	105	10.0	3.00	86400	132000	2330	3560	1540	2350

- 1) Dimension H<sub>2</sub> with cover strip
- **2)** Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🖘 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_{\mathrm{I}}$  and  $\mathbf{M}_{\mathrm{I}}$  by 1.26 according to the table.

# SLH - Slimline, long, high R1624 ... 2.

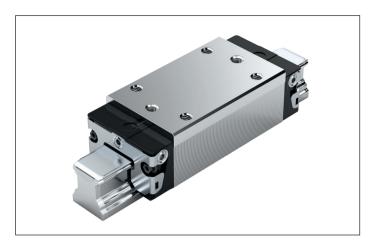

# **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

## Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS/SNO ball guide rails. Ball runner blocks of size 55 can be found in chapter "Heavy-duty ball runner block BSHP made of steel" after this chapter.

#### **Options and material numbers**

62

Size	Ball runner	Preload	class			Accura	cy class	;		Seals o	n ball r	unner b	locks		
	blocks with size									withou	t ball cl	nain	with ba	ll chain	
		C0	C1	C2	C3	N	Н	P	XP	SS	LS1)	DS	SS	LS <sup>1)</sup>	DS
25	R1624 2	9				4	3	-	_	20	21	_	22	23	_
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	_	_	8	20	21	2Z	22	23	2Y
30	R1624 7	9				4	3	_	-	20	21	_	22	23	-
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	_	8	20	21	2Z	22	23	2Y
35	R1624 3	9				4	3	_	-	20	21	_	22	23	_
			1			4	3	2	8	20	21	2Z	22	23	2Y
				2		-	3	2	8	20	21	2Z	22	23	2Y
					3	-	-	_	8	20	21	2Z	22	23	2Y
45	R1624 4	9				4	3	-	_	20	_	_	22	-	_
			1			4	3	2	8	20	_	2Z	22	-	2Y
				2		-	3	2	8	20	_	2Z	22	-	2Y
					3	-	_	-	8	20	_	2Z	22	-	2Y
E.g.:	R16247		1				3			20					

<sup>1)</sup> Only for accuracy classes N and H and for XP in preload class C1.

#### Order example

Options:

► Ball runner blocks SLH

▶ Size 30

▶ Preload class C1

► Accuracy class H

With standard seal, without ball chain

Material number:

R1624 713 20

# Preload classes

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

SS = Standard seal

LS = Low-friction seal


DS = Double-lip seal

#### Key

gray numbers

No preferred variant /

combination

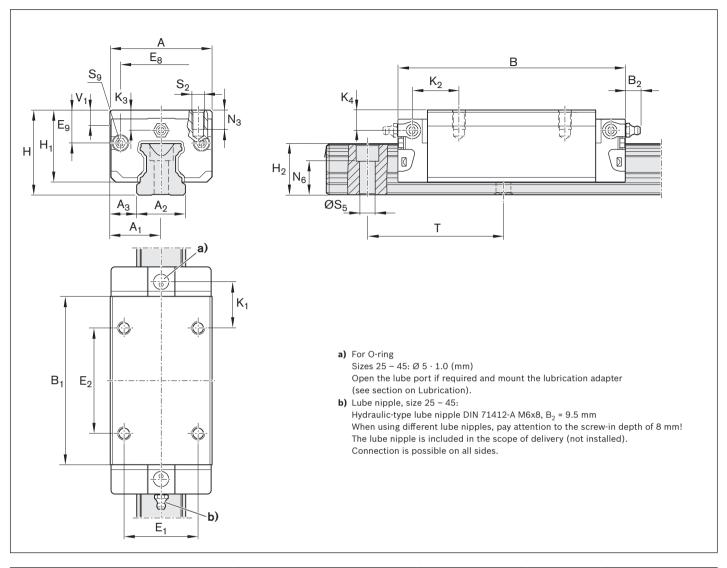

Size	Dimensio	ns (mm	1)															
	A	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	$E_2$	E <sub>8</sub>	E <sub>9</sub>	Н	$H_1$	$H_{2}^{1)}$	$H_{2}^{2)}$	K <sub>1</sub>	$K_2$	K <sub>3</sub>	$K_4$
25	48	24	23	12.5	107.9	79.5	35	50	38.30	15.50	40	33.90	24.45	24.25	20.80	21.95	9.50	9.50
30	60	30	28	16.0	119.7	89.4	40	60	48.40	17.60	45	38.35	28.55	28.35	21.00	22.70	9.05	9.05
35	70	35	34	18.0	139.0	105.5	50	72	58.00	24.35	55	47.40	32.15	31.85	23.75	25.25	13.90	13.90
45	86	43	45	20.5	174.1	133.5	60	80	69.80	30.90	70	60.30	40.15	39.85	35.50	37.50	18.20	18.20

Size	Dimension	s (mm)				-		Mass (kg)	Load capa	acities³)	Load mo	_	(Nm)	
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	S <sub>2</sub>	<b>S</b> <sub>5</sub>	S <sub>9</sub>	т	$V_1$	m	c	C <sub>o</sub>	M <sub>t</sub>	M <sub>to</sub>	M <sub>L</sub>	Щ. "Н М <sub>LO</sub>
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.80	37300	52500	530	750	530	740
30	12.0	17.0	M8	9.0	M3x5	80	7.0	1.20	46000	66900	800	1160	740	1080
35	13.0	20.5	M8	9.0	М3х5	80	8.0	2.10	66700	116000	1440	2500	1290	2240
45	18.0	23.5	M10	14.0	M4x7	105	10.0	4.10	111000	190000	3010	5120	2730	4660

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🕫 12

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_1$  and  $\mathbf{M}_1$  by 1.26 according to the table.

# FNN - flange, normal, low R1693 ... 1.



# **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$  $a_{max} = 250 \text{ m/s}^2$ Acceleration:  $(If F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2)$ 

## Note on lubrication

No initial lubrication

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks	Preload class		Accuracy class		Seals on ball run	ner blocks
	with size					without ball chai	n
		CO	C1	N	H	SS	LS
20	R1693 8	9	1	4	3	10	11
25 <sup>1)</sup>	R1693 2	9	1	4	3	10	11
E.g.:	R1693 8		1		3	10	

1) BSHP ball runner block

#### Order example

Options:

64

- Ball runner block FNN
- Size 20
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1693 813 10

#### **Preload classes**


C0 = Without preload (clearance)

C1 = Moderate preload

SS = Standard seal LS = Low-friction seal

gray numbers

No preferred variant / combination (partially longer delivery times)

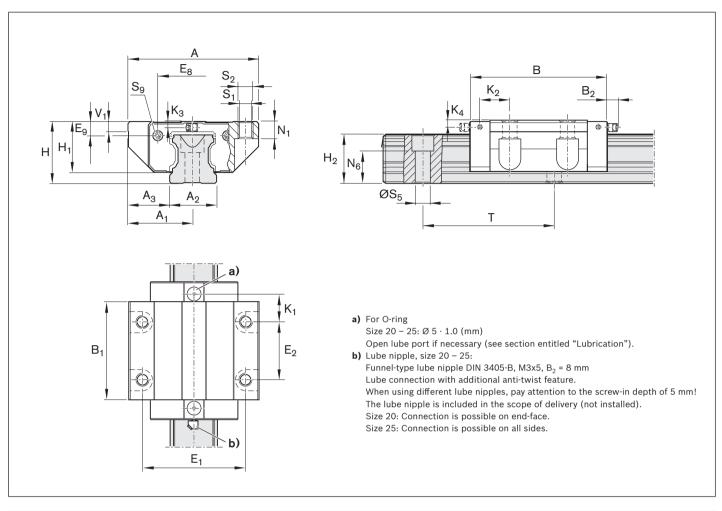

Size	Dimension	ns (mr	n)														
	A A <sub>1</sub>	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{(2)}$	$K_1$	$K_2$	$K_3$	$K_4$
20	59 29.5	20	19.5	72.5	49.6	49	32	30.5	5.6	28	23.0	20.75	20.55	13.0	_	3.6	
25	73 36.5	23	25.0	81.0	57.8	60	35	38.3	8.5	33	26.5	24.45	24.25	16.6	17.0	4.1	4.1

Size	Dimen	sions (	mm)							Load capa	cities <sup>3)</sup>	Load moi	ments <sup>3)</sup>	(Nm)	
									(kg)	(IN)	•				
										<b>→</b> □	<u> </u>				
	N <sub>1</sub>	N <sub>6</sub> ±0.5	S <sub>1</sub>	$S_2$	$S_5$	$S_9$	Т	V <sub>1</sub>	m	С	C <sub>0</sub>	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	M <sub>LO</sub>
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.40	14500	24400	190	310	100	165
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.60	28600	35900	410	510	290	360

- $\textbf{1)} \ \ \mathsf{Dimension} \ \mathsf{H}_2 \ \mathsf{with} \ \mathsf{cover} \ \mathsf{strip}$
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.

  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

  Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M**<sub>1</sub> and **M**<sub>1</sub> by 1.26 according to the table.

# FKN - flange, short, low R1663 ... 1.



# **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

## Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with	Preload class		Accuracy class		Seals on ball rui	nner blocks
	size					without ball cha	in
		CO	C1	N	Н	SS	LS
20	R1663 8	9	1	4	3	10	11
25 <sup>1)</sup>	R1663 2	9	1	4	3	10	11
E.g.:	R1663 8		1		3	10	_

1) BSHP ball runner block

# Order example

Options:

- ► Ball runner block FKN
- ▶ Size 20
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1663 813 10

## Preload classes

C0 = Without preload (clearance) C1 = Moderate preload


#### Seals

SS = Standard seal LS = Low-friction seal

#### Key

gray numbers

 No preferred variant / combination
 (partially longer delivery times)

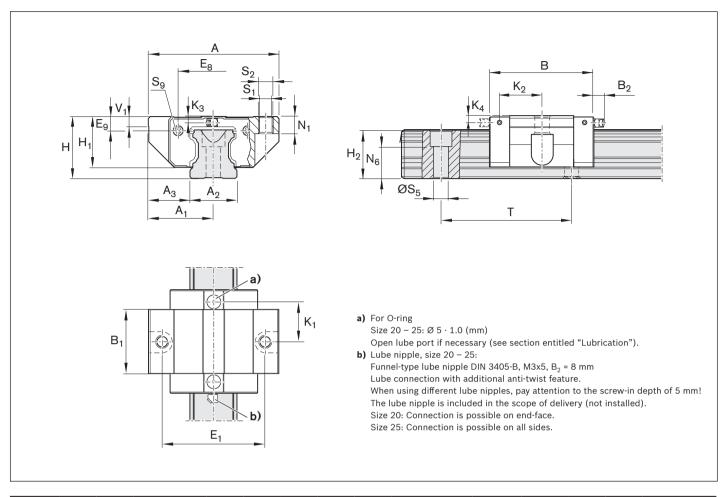


Size	Dimensi	ions (mn	n)														
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	E <sub>8</sub>	$E_9$	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
20	59	29.5	20	19.5	55	31.9	49	30.5	5.6	28	23.0	20.75	20.55	20.1	_	3.6	
25	73	36.5	23	25.0	62	38.6	60	38.3	8.5	33	26.5	24.45	24.25	24.5	25.0	4.1	4.1

Size	Dimen	sions (r	nm)						Mass	Load capa	cities <sup>3)</sup>	Load mome	ents <sup>3)</sup> (Nm	)	
									(kg)	(N)				_	
										<b>↓</b>	<u>†</u>				<b>П</b>
									m	'	Δ,		_		الل. ال
	N <sub>1</sub>	$N_6^{\pm 0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	$V_1$		С	C <sub>0</sub>	M <sub>t</sub>	$M_{t0}$	$M_L$	M <sub>L0</sub>
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.25	9600	13600	120	170	40	58
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.45	19800	21200	280	300	130	140

- $\textbf{1)} \ \ \mathsf{Dimension} \ \mathsf{H}_2 \ \mathsf{with} \ \mathsf{cover} \ \mathsf{strip}$
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.
  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.
  Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M<sub>t</sub> and M<sub>L</sub> by 1.26 according to the table.

# SNN - Slimline, normal, low R1694 ... 1.

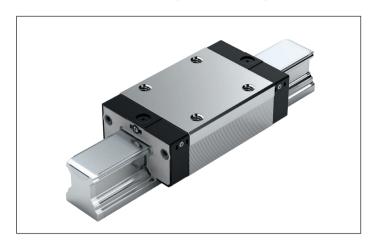

# **Dynamic characteristics**

$$\begin{split} & \text{Travel speed:} & \quad \text{$v_{max}$ = 3 m/s$} \\ & \text{Acceleration:} & \quad a_{max} = 250 \text{ m/s}^2 \\ & (\text{If $F_{comb}$} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2) \end{split}$$

## Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Options and material numbers**

Size	Ball runner	Preload class		Accuracy class		Seals on ball run	ner blocks
	blocks with size					without ball chai	n
		CO	C1	N	н	SS	LS
20	R1694 8	9	1	4	3	10	11
25 <sup>1)</sup>	R1694 2	9	1	4	3	10	11
E.g.:	R1694 8		1		3	10	

1) BSHP ball runner block

# Order example

Options:

- ► Ball runner block SNN
- ▶ Size 20
- ▶ Preload class C1
- Accuracy class H
- ► With standard seal, without ball chain

Material number:

R1694 813 10

#### Preload classes

C0 = Without preload (clearance)

C1 = Moderate preload

#### Seals


SS = Standard seal

LS = Low-friction seal

#### Key

gray numbers

 No preferred variant / combination
 (partially longer delivery times)

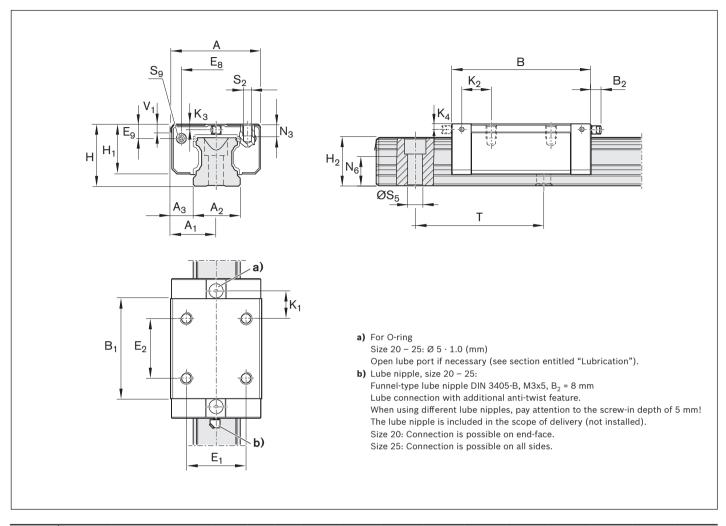


Size	Dime	nsion	s (mm	1)														
	Α	$A_1$	$\mathbf{A_2}$	$A_3$	B <sup>+0.5</sup>	$B_1$	E,	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
20	42	21	20	11.0	72.5	49.6	32	32	30.5	5.6	28	23.0	20.75	20.55	13.0	-	3.6	
25	48	24	23	12.5	81.0	57.8	35	35	38.3	8.5	33	26.5	24.45	24.25	16.6	17.0	4.1	4.1

Size	Dimension	ons (mm)	1						Load capac	ities <sup>3)</sup>	Load mome	ents <sup>3)</sup> (Nm	)	
								(kg)	(N)					
									→				ر شک	
	N <sub>3</sub>	$N_6^{\pm 0.5}$	$S_2$	<b>S</b> <sub>5</sub>	S <sub>9</sub>	T	V <sub>1</sub>	m	С	$C_0$	M <sub>t</sub>	$M_{t0}$	$M_{L}$	$M_{L0}$
20	6.3	13.2	M5	6.0	M3x5	60	6.0	0.30	14500	24400	190	310	100	165
25	7.0	15.2	M6	7.0	M3x5	60	7.5	0.45	28600	35900	410	510	290	360

- Dimension H<sub>2</sub> with cover strip
   Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C,  $M_1$  and  $M_1$  by 1.26 according to the table.

# SKN - Slimline, short, low R1664 ... 1.

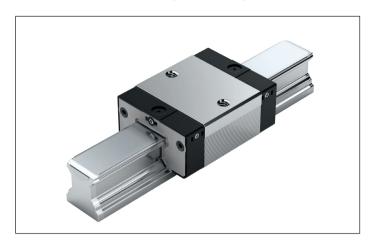

# **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

## Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload class		Accuracy class		Seals on ball runner blocks without ball chain		
		CO	C1	N	Н	SS	LS	
20	R1664 8	9	1	4	3	10	11	
25 <sup>1)</sup>	R1664 2	9	1	4	3	10	11	
E.g.:	R1664 8		1		3	10		

1) BSHP ball runner block

# Order example

Options:

- ► Ball runner block SKN
- ▶ Size 20
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1664 813 10

#### Preload classes

C0 = Without preload (clearance) C1 = Moderate preload


#### Seals

SS = Standard seal LS = Low-friction seal

#### Key

gray numbers

No preferred variant / combination

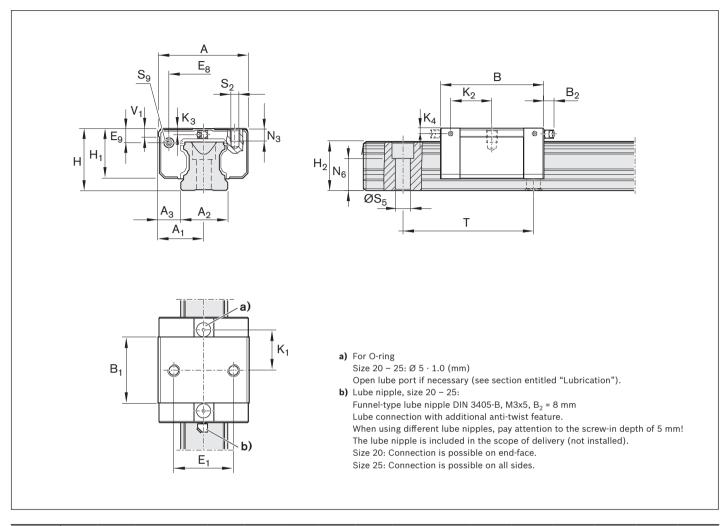


Size	Dimensions (mm)																
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$	K <sub>1</sub>	K <sub>2</sub>	$K_3$	K <sub>4</sub>
20	42	21	20	11.0	55	31.9	32	30.5	5.6	28	23.0	20.75	20.55	20.1		3.6	
25	48	24	23	12.5	62	38.6	35	38.3	8.5	33	26.5	24.45	24.25	24.5	25.0	4.1	4.1

Size	Dimens	sions (m	m)					Mass (kg)	Load capacit	ties <sup>3)</sup> (N)	Load moments	<sup>3)</sup> (Nm)		
									<b>↓ 1</b> →	` <b>_</b> ←				
	N <sub>3</sub>	$N_6^{\pm 0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	C <sub>o</sub>	M <sub>t</sub>	M <sub>t0</sub>	$M_L$	M <sub>LO</sub>
20	6.3	13.2	M5	6.0	М3х5	60	6.0	0.20	9600	13600	120	170	40	58
25	7.0	15.2	M6	7.0	М3х5	60	7.5	0.30	19800	21200	280	300	130	140

- $\textbf{1)} \ \ \mathsf{Dimension} \ \mathsf{H}_2 \ \mathsf{with} \ \mathsf{cover} \ \mathsf{strip}$
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain. Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M<sub>t</sub> and M<sub>L</sub> by 1.26 according to the table.

# FNS - flanged, normal, standard height, R1651 ... 1.

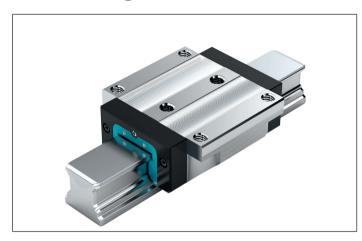

# Dynamic characteristics

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

# **Note on lubrication**

▶ No initial lubrication

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload	Accur	acy cl	ass			Seals on ball runner blocks without ball chain			
		CO	C1	C2	С3	N	н	Р	SP	UP	ss
55	R1651 5	9				4	3	-	_	_	10
			1			4	3	2	1	9	10
				2		-	3	2	1	9	10
					3	-	-	2	1	9	10
65	R1651 6	9				4	3	-	_	-	10
			1			4	3	2	1	9	10
				2		-	3	2	1	9	10
					3	-	-	2	1	9	10
E.g.:	R1651 5		1				3				10

# Order example

Options:

- ▶ Ball runner blocks FNS
- ▶ Size 55
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:


R1651 513 10

#### Preload classes

- C0 = Without preload (clearance)
- C1 = Moderate preload
- C2 = Average preload
- C3 = High preload

#### Seals

SS = Standard seal

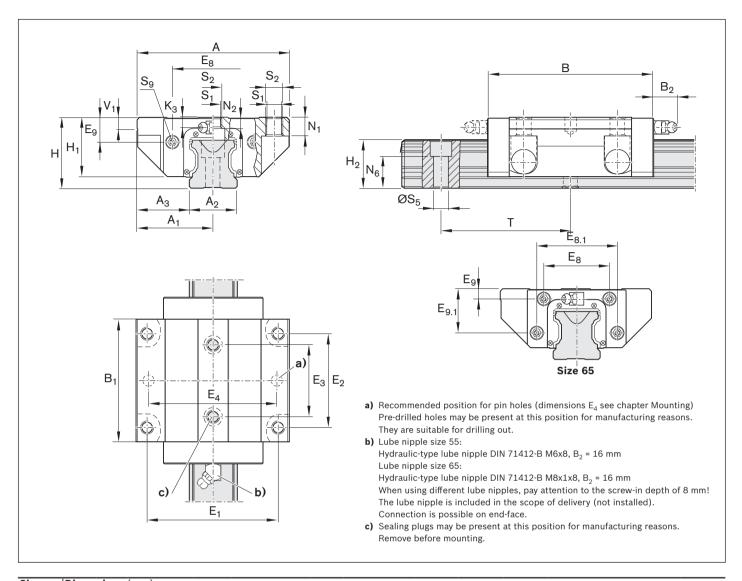


Size	Dimens	ions (	mm)														
	Α	$A_1$	$\mathbf{A_2}$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$E_2$	E <sub>3</sub>	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	Н	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	H <sub>2</sub> <sup>2)</sup>
55	140	70	53	43.5	159	115.5	116	95	70	80	_	22.3	-	70	57	48.15	47.85
65	170	85	63	53.5	188	139.6	142	110	82	76	100	11.0	53.5	90	76	60.15	59.85

Size	Dime	nsio	ns (mr	n)			-					Load capa	cities <sup>3)</sup> (N)	Load mo	ments <sup>3)</sup>	(Nm)	
											(kg)		ı <b>A</b>				
											<b>→</b> □	<u> </u>		_ 			
	K <sub>3</sub>	$N_1$	$N_2$	$N_6^{\pm0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	$V_1$	m	С	C <sub>0</sub>	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	$M_{L0}$
55	9	18	13.5	29.0	12.4	M14	16	M5x8	120	12	5.20	109000	174000	3480	5550	2320	3690
65	16	23	14.0	38.5	14.6	M16	18	M4x7	150	15	10.25	172000	280000	6810	11100	4560	7400

- 1) Dimension H<sub>2</sub> with cover strip.
- 2) Dimension  $H_2$  without cover strip.
- 3) Load ratings and load moments for ball runner block without ball chain. Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M₁ and M₁ by 1.26 according to the table.

# FLS - flanged, long, standard height, R1653 ... 1.

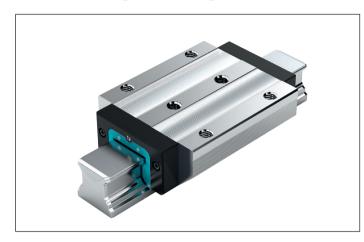

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### **Note on lubrication**

▶ No initial lubrication

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload cla	ass			Accura	icy clas	s			Seals on ball runner blocks without ball chain
		CO	C1	C2	СЗ	N	н	P	SP	UP	SS
55	R1653 5	9				4	3	-	_	-	10
			1			4	3	2	1	9	10
				2		-	3	2	1	9	10
					3	-	_	2	1	9	10
65	R1653 6	9				4	3	-	-	-	10
			1			4	3	2	1	9	10
				2		-	3	2	1	9	10
					3	-	_	2	1	9	10
E.g.:	R1653 5		1		•		3				10

#### Order example

Options:

- ▶ Ball runner blocks FLS
- ▶ Size 55
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain


Material number:

R1653 513 10

#### Preload classes

- C0 = Without preload (clearance)
- C1 = Moderate preload
- C2 = Average preload
- C3 = High preload

#### Seals

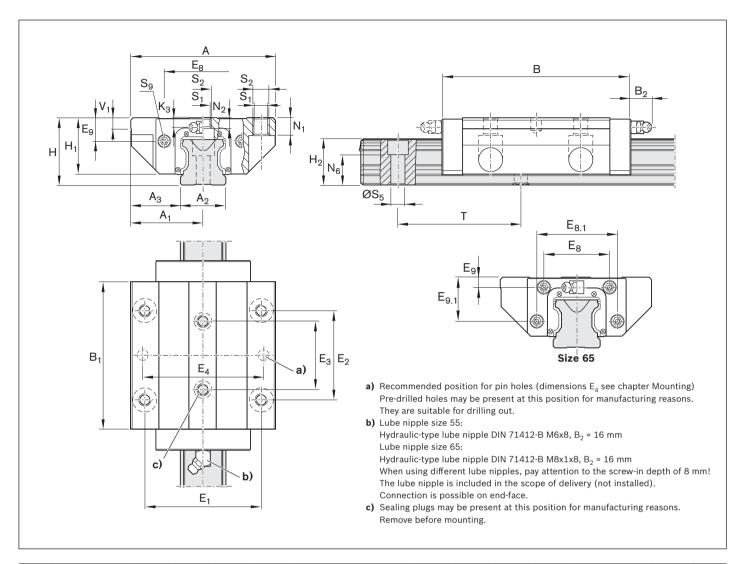


Size	Dimension	ns (mm)															
	Α	$\mathbf{A_1}$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	$E_2$	$E_3$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{2)}$
55	140	70	53	43.5	199	155.5	116	95	70	80	_	22.3	-	70	57	48.15	47.85
65	170	85	63	53.5	243	194.6	142	110	82	76	100	11.0	53.5	90	76	60.15	59.85

Size	Dime	nsio	ns (m	m)							Mass	Load capa	rcities <sup>3)</sup> (N)	Load mom	<b>ents<sup>3)</sup></b> (Nr	n)	
											(kg)				_		
												<b>→</b> [	<u>↓ †</u> ←				
	K <sub>3</sub>	$N_1$	$N_2$	$N_6^{\pm 0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	C <sub>0</sub>	M <sub>t</sub>	$M_{t0}$	$M_L$	M <sub>L0</sub>
55	9	18	13.5	29.0	12.4	M14	16	M5x8	120	12	7.50	139000	245000	4410	7780	3960	6990
65	16	23	14.0	38.5	14.6	M16	18	M4x7	150	15	14.15	223000	404000	8810	16000	8160	14800

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.
  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.
  Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M<sub>t</sub> and M<sub>1</sub> by 1.26 according to the table.

# SNS - Slimline, normal, standard height, R1622...1.

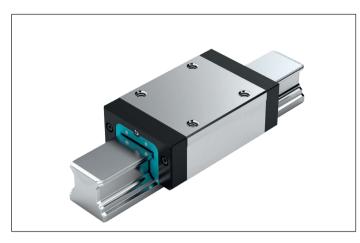

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload class				Accuracy c	lass		Seals on ball runner blocks without ball chain
		CO	C1	C2	C3	N	Н	Р	SS
55	R1622 5	9				4	3	_	10
			1			4	3	2	10
				2		-	3	2	10
					3	_	_	2	10
65	R1622 6	9				4	3	-	10
			1			4	3	2	10
				2		_	3	2	10
					3	-	-	2	10
E.g.:	R1622 5		1				3		10

#### Order example

#### Options:

- ► Ball runner blocks SNS
- ▶ Size 55
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain


Material number:

R1622 513 10

#### Preload classes

- C0 = Without preload (clearance)
- C1 = Moderate preload
- C2 = Average preload
- C3 = High preload

#### Seals

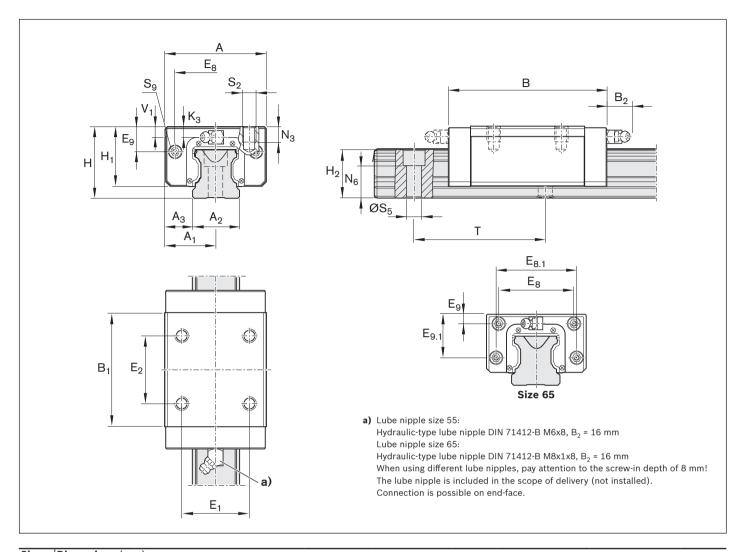

Size	Dimension	<b>ns</b> (mm)	)													
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	$E_2$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$
55	100	50	53	23.5	159	115.5	75	75	80	_	22.3		70	57	48.15	47.85
65	126	63	63	31.5	188	139.6	76	70	76	100	11.0	53.5	90	76	60.15	59.85


Size	Dimensi	ions (	mm)						Mass (kg)	Load capa	cities <sup>3)</sup> (N)	Load mo	ments <sup>3)</sup>	(Nm)	
										<b>→</b> □	<u>}</u> ↑				
	K <sub>3</sub>	$N_3$	$N_6^{\pm0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	C <sub>0</sub>	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	$M_{LO}$
55	9	19	29.0	M12	16	M5x8	120	12	3.80	109000	174000	3480	5550	2320	3690
65	16	21	38.5	M16	18	M4x7	150	15	6.90	172000	280000	6810	11100	4560	7400

- $\textbf{1)} \quad \text{Dimension H}_2 \text{ with cover strip}$
- 2) Dimension  $H_2$  without cover strip
- 3) Load ratings and load moments for ball runner block **without** ball chain.

  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

  Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M**, and **M**<sub>1</sub> by 1.26 according to the table.

# SLS - Slimline, long, standard height, R1623...1.

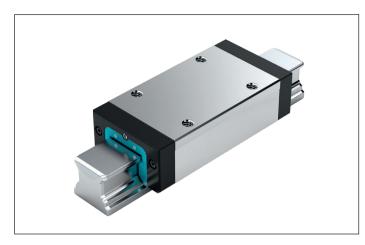

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload c	ass			Accuracy	class		Seals on ball runner blocks without ball chain
		C0	C1	C2	C3	N	Н	P	SS
55	R1623 5	9				4	3	-	10
			1			4	3	2	10
				2		_	3	2	10
					3	_	_	2	10
65	R1623 6	9				4	3	_	10
			1			4	3	2	10
				2		-	3	2	10
					3	-	-	2	10
E.g.:	R1623 5		1				3		10

#### Order example

#### Options:

▶ Ball runner blocks SLS

- ▶ Size 55
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1623 513 10

#### Preload classes


C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

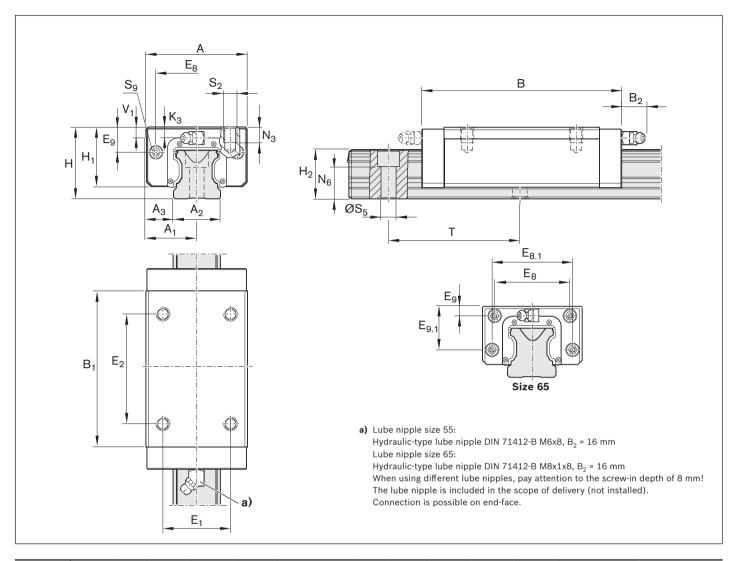

Size	Dimension	ns (mm)	)													
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$E_2$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_{2}^{2)}$
55	100	50	53	23.5	199	155.5	75	95	80		22.3	_	70	57	48.15	47.85
65	126	63	63	31.5	243	194.6	76	120	76	100	11.0	53.5	90	76	60.15	59.85


Size	Dimen	sions	(mm)				1			Load capa	cities <sup>3)</sup> (N)	Load mor	nents <sup>3)</sup> (	Nm)	
									(kg)	<b>→</b> [2	<u>†</u>		]		
	K <sub>3</sub>	$N_3$	$N_6^{\pm 0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	C <sub>0</sub>	M <sub>t</sub>	$M_{t0}$	$M_L$	M <sub>LO</sub>
55	9	19	29.0	M12	16	M5x8	120	12	4.8	139000	245000	4410	7780	3960	6990
65	16	21	38.5	M16	18	M4x7	150	15	9.8	223000	404000	8810	16000	8160	14800

- $\textbf{1)} \ \ \mathsf{Dimension} \ \mathsf{H}_2 \ \mathsf{with} \ \mathsf{cover} \ \mathsf{strip}$
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.

  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

  Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M**<sub>1</sub> and **M**<sub>1</sub> by 1.26 according to the table.

# SNH - Slimline, normal, high, R1621 ... 1.

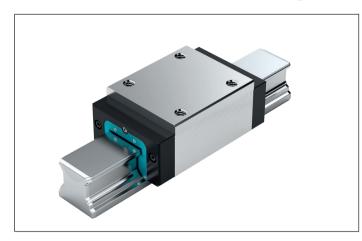

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload o	class			Accuracy	/ class		Seals on ball runner blocks without ball chain
		C0	C1	C2	C3	N	H	P	SS
55	R1621 5	9				4	3	-	10
			1			4	3	2	10
				2		_	3	2	10
					3	-	_	2	10
E.g.:	R1621 5		1				3		10

#### Order example

#### Options:

- ► Ball runner blocks SNH
- ▶ Size 55
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1621 513 10

#### **Preload classes**


C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

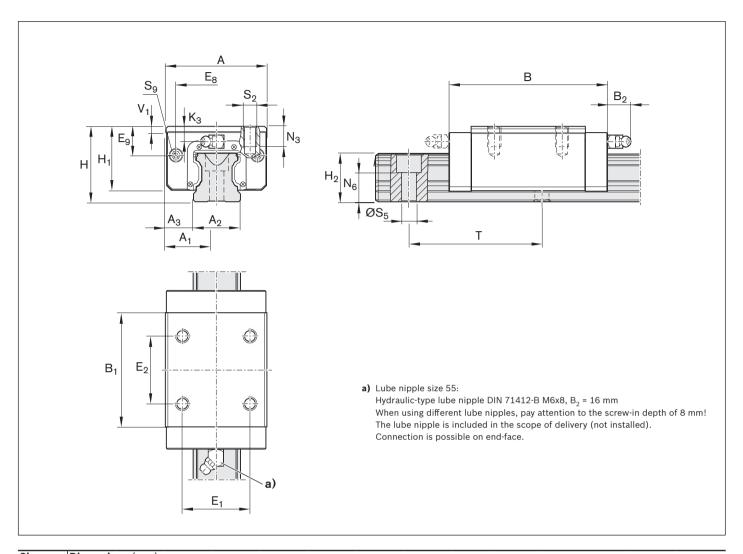

Size	Dimensions	(mm)												
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{(2)}$
55	100	50	53	23.5	159	115.5	75	75	80	32.3	80	67	48.15	47.85

Size	Dimens	ions (	mm)							Load capa	cities <sup>3)</sup> (N)	Load mon	nents³) (N	lm)	
									(kg)	١.			_		
									<b>→</b> □	- <b>1</b>					
	K <sub>3</sub>	$N_3$	$N_6^{\pm0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	$V_1$	m	С	$C_0$	M <sub>t</sub>	$M_{t0}$	ML	M <sub>LO</sub>
55	19	19	29	M12	16	M5x8	120	12	4.70	109000	174000	3480	5550	2320	3690

- $\textbf{1)} \ \ \mathsf{Dimension} \ \mathsf{H}_2 \ \mathsf{with} \ \mathsf{cover} \ \mathsf{strip}$
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.
  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.
  Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M<sub>1</sub> and M<sub>1</sub> by 1.26 according to the table.

# SLH - Slimline, long, high, R1624 ... 1.



#### **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ No initial lubrication

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload cl					class		Seals on ball runner blocks without ball chain
		C0	C1	C2	C3	N	Н	P	SS
55	R1624 5	9				4	3	-	10
			1			4	3	2	10
				2		-	3	2	10
					3	-	-	2	10
E.g.:	R1624 5		1				3		10

#### Order example

#### Options:

- ► Ball runner blocks SLH
- ▶ Size 55
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1624 513 10

#### **Preload classes**


C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

C3 = High preload

#### Seals

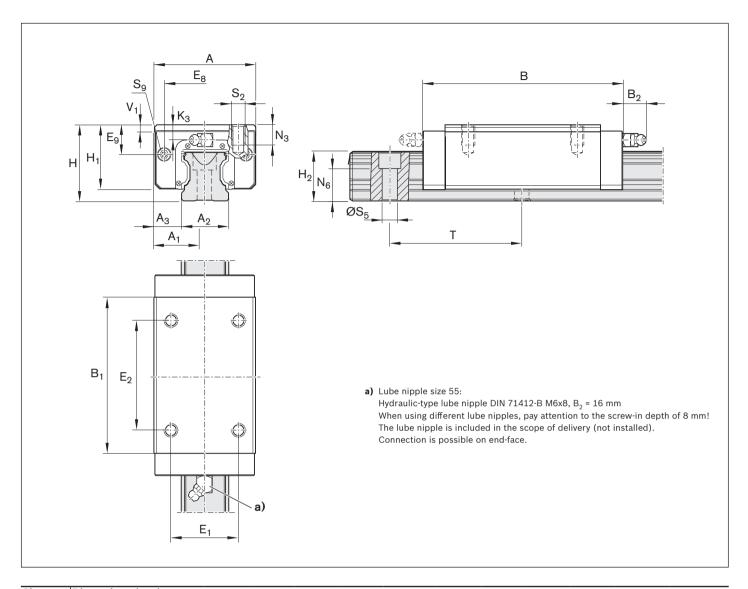

Size	Dimensions	s (mm)												
	Α	$A_1$	$\mathbf{A_2}$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	$E_2$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	H <sub>2</sub> <sup>1)</sup>	$H_2^{(2)}$
55	100	50	53	23.5	199	155.5	75	95	80	32.3	80	67	48.15	47.85

Size	Dimen	sions	(mm)						Mass (kg)	Load capad	cities <sup>3)</sup> (N)	Load mom	ents <sup>3)</sup> (N	lm)	
								( 0)	→ <u>\</u>	<u>†</u>					
	K <sub>3</sub>	$N_3$	$N_6^{\pm 0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>	m	С	Co	M <sub>t</sub>	$M_{t0}$	$M_L$	$M_{L0}$
55	19	19	29	M12	16	M5x8	120	12	6.00	139000	245000	4410	7780	3960	6990

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.

  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.

  Often only 50,000 m are actually stipulated. For comparison: Multiply the values **C**, **M**, and **M**<sub>1</sub> by 1.26 according to the table.

#### **Characteristic features**

► Excellent dynamic characteristics:


Travel speed:  $v_{max} = 10 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ 

- ► The same high load ratings in all four main directions of loading
- ► Long-term lubrication is possible over several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication
- ▶ Lube fittings with metal threads on all sides
- ► Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.
- Maximum system rigidity due to preloaded O-arrangement
- ▶ Electrically insulating due to use of ceramic balls
- ► Existing range of accessories fully usable
- ► Globally unique, premium logistics

#### **Further highlights:**

- ▶ High speed thanks to the low weight of ceramic balls
- Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- ► Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block
- ▶ End-face fastening thread for all attachments
- ► High rigidity in all load directions permits applications with just one runner block per rail
- ► Integrated all-round sealing
- ► High torque load capacity
- Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ► Smooth, quiet running thanks to optimally designed ball return and guideway
- ► Available in six common sizes
- ▶ Ball runner block pre-lubricated at the factory

#### 1) Type-dependent

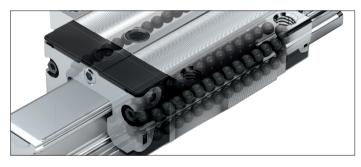

#### Ceramic balls

Enable maximum travel speeds

#### Definition of the format of ball runner blocks

Criterion	Designation	Code (ex	ample)	
		F	N	S
Width	Flange <b>(F)</b>	F		
	Slimline (S)	S		
	Wide (B)	В		
	Compact (C)	С		
Length	Normal (N)		N	,
	Long (L)		L	
	Short (K)		K	
Height	Standard height (S)			S
	High (H)			Н
	Low (N)		·	Ν

#### Note

Can be used on all SNS/SNO ball guide rails.

#### **Overview of formats**



FLS R2002 ... 9.



SNS R2011 ... 9.



SLS R2012 ... 9.



## FNS, FLS, SNS, SLS

Format	Size	Ball runner	Preload	Accu	racy	Seal ball	Load capac	ities <sup>1)</sup>	Load mom	ents <sup>1)</sup> (Ni	m)		Mass
		blocks with size	class	class	<b>i</b>	runner block, without ball chain	<b>↓ ↑</b> → □ ←			<b>&gt;</b>			(kg)
			C2	н	Р	ss	С	Co	M <sub>t</sub>	M <sub>t0</sub>	ML	M <sub>Lo</sub>	m
FNS	15	R2001 1	2	3	2	90	6880	8860	66	85	47	61	0.20
	20	R2001 8	2	3	2	90	16300	20800	210	270	140	180	0.45
	25	R2001 2	2	3	2	90	20000	25100	280	360	200	250	0.60
	30	R2001 7	2	3	2	90	25500	33500	440	580	310	400	1.05
	35	R2001 3	2	3	2	90	36200	56500	780	1210	510	790	1.50
	45	R2001 4	2	3	2	90	60400	92400	1630	2490	1070	1640	2.85
	E.g.:	R2001 7	2	3		90							
FLS	15	R2002 1	2	3	2	90	8930	12800	86	120	85	120	0.30
	20	R2002 8	2	3	2	90	20700	29200	260	370	240	340	0.55
	25	R2002 2	2	3	2	90	26000	36600	370	520	370	520	0.80
	30	R2002 7	2	3	2	90	32100	46700	560	810	520	750	1.45
	35	R2002 3	2	3	2	90	46600	81100	1000	1740	900	1560	2.15
	45	R2002 4	2	3	2	90	77700	133000	2100	3580	1910	3260	4.10
SNS	15	R2011 1	2	3	2	90	6880	8860	66	85	47	61	0.15
	20	R2011 8	2	3	2	90	16300	20800	210	270	140	180	0.35
	25	R2011 2	2	3	2	90	20000	25100	280	360	200	250	0.45
	30	R2011 7	2	3	2	90	25500	33500	440	580	310	400	0.80
	35	R2011 3	2	3	2	90	36200	56500	780	1210	510	790	1.15
	45	R2011 4	2	3	2	90	60400	92400	1630	2490	1070	1640	2.25
SLS	15	R2012 1	2	3	2	90	8930	12800	86	120	85	120	0.20
	20	R2012 8	2	3	2	90	20700	29200	260	370	240	340	0.45
	25	R2012 2	2	3	2	90	26000	36600	370	520	370	520	0.60
	30	R2012 7	2	3	2	90	32100	46700	560	810	520	750	1.05
	35	R2012 3	2	3	2	90	46600	81100	1000	1740	900	1560	1.60
	45	R2012 4	2	3	2	90	77700	133000	2100	3580	1910	3260	3.00

Load ratings and load moments for ball runner block without ball chain.
 Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.
 Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M, and M, by 1.26 according to the table.

#### Note

Dimensions, dimensional drawing, load ratings, rigidity and moments see standard ball runner block BSHP

#### Order example FNS

**Preload classes** C2 = Average preload Seals

Options:

▶ Ball runner blocks FNS

- ▶ Size 30
- ▶ Preload class C2
- Accuracy class H
- ► With standard seal, without ball chain

Material number:

R2001 723 90

#### Characteristic features

- Compensates own misalignments (for deviations up to 10' in 2 levels)
- ► Extra-compact design
- ► The same high load ratings in all four main directions of loading
- Enables greater parallelism and height offsets of mounting bases
- Accuracy classes H and N
- Preload classes:C0 (without preload, clearance)

C1 (moderate preload)

- Smooth operation due to optimal return and ball pick-up and entry design
- ► Low noise level and outstanding travel behavior
- ► Excellent dynamic characteristics:

Travel speed:  $v_{max} = 5 \text{ m/s}$ 

Acceleration:  $a_{max} = 500 \text{ m/s}^2$ 

- Minimum quantity lubrication system with integrated reservoir for oil lubrication
- ► Lube fittings with metal threads on all sides
- ▶ Ball runner block pre-lubricated at the factory
- ► Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.

#### **Self-aligning**

Rexroth Super ball runner blocks with self-aligning feature automatically compensate misalignments up to 10 ft.

No reduction in load capacity occurs as a result of angular pressure.

The centers of the matching surfaces supporting the steel bearing plates serve as a rocking fulcrum.


Misalignments between ball runner blocks and ball guide rails are therefore not problematic since machining inaccuracies, mounting errors or rail deflections are automatically compensated.

The self-aligning feature ensures that the balls enter the load-bearing zone smoothly and that the load is distributed evenly across the entire row of balls. This results in extra-smooth running and considerably


This results in extra-smooth running and considerably longer service life.

Using two Super Ball Runner Blocks on one ball guide rail, a system of high-load bearing and stabilized ball rail systems can be created that is particularly suitable for the handling sector.

Two runner blocks must always be mounted on one rail.

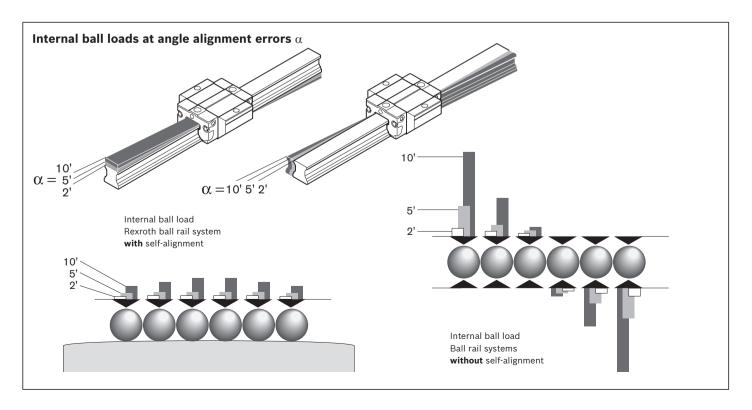


#### **Overview of formats**

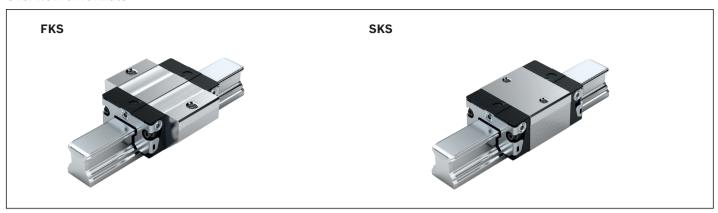

#### **Definition of the format of ball runner blocks**

Criterion	Designation	Code (e	example)	
		F	K	s
Width	Flange <b>(F)</b>	F	'	
	Slimline (S)	S		
	Wide (B)	В		
	Compact (C)	С		
Length	Normal (N)		N	,
	Long (L)		L	
	Short (K)		K	
Height	Standard height (S)			S
	High (H)			Н
	Low (N)			N

# FKS - flange, short, standard height

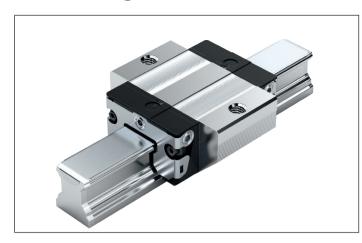

#### R1661 ... 2.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$  $a_{max} = 500 \text{ m/s}^2$ Acceleration: (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

Pre-lubricated

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks	Preload class		Accuracy class		Seals on ball run	ner blocks
	with size					without ball chai	n
		C0	C1	N	н	SS	LS
15	R1661 1	9	1	4	3	20	21
20	R1661 8	9	1	4	3	20	21
25	R1661 2	9	1	4	3	20	21
30	R1661 7	9	1	4	3	20	21
35	R1661 3	9	1	4	3	20	21
E.g.:	R1661 7		1		3	20	

#### Order example

#### Options:

- Ball runner blocks FKS
- Size 30
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1661 713 20

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

SS = Standard seal


LS = Low-friction seal

#### Key

gray numbers

No preferred variant / combination

(partially longer delivery times)

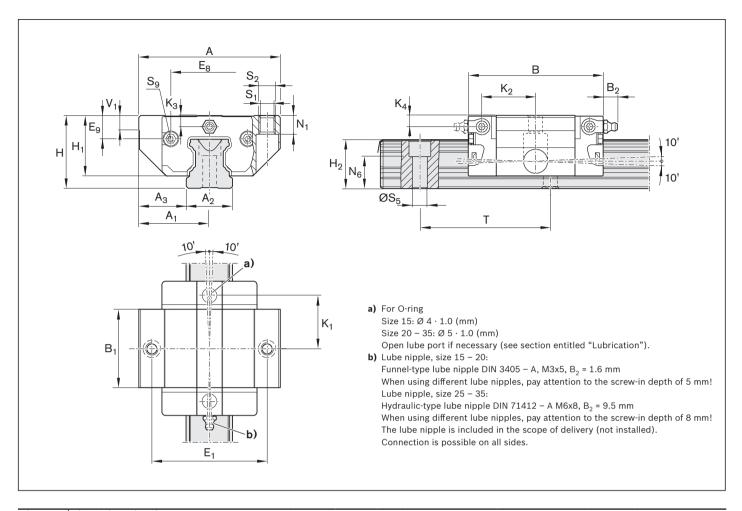

Size	Dimen	Dimensions (mm)															
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	E <sub>1</sub>	E <sub>8</sub>	E <sub>9</sub>	Н	$H_1$	$H_{2}^{1)}$	$H_2^{2)}$	$K_1$	$K_2$	$K_3$	$K_4$
15	47	23.5	15	16.0	44.7	25.7	38	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	63	31.5	20	21.5	57.3	31.9	53	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	70	35.0	23	23.5	67.0	38.6	57	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	90	45.0	28	31.0	75.3	45.0	72	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	100	50.0	34	33.0	84.9	51.4	82	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90
	_																

Size	Dimens	sions (mi	m)						Weight (kg)	Load ratings <sup>3)</sup> (N)	Permissible load (N)	Load mome	nts <sup>3)</sup> (Nm)
										<b>↓↑</b>			
	N <sub>1</sub>	$N_6^{\pm0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>		С	F <sub>max</sub>	$M_t$	$M_{t max}$
15	5.2	10.3	4.3	M5	4.5	M2.5x3.5	60	5.0	0.15	3900	1500	39	15
20	7.7	13.2	5.3	M6	6.0	M3x5	60	6.0	0.30	10100	3900	130	50
25	9.3	15.2	6.7	M8	7.0	M3x5	60	7.5	0.50	11400	4400	170	65
30	11.0	17.0	8.5	M10	9.0	M3x5	80	7.0	0.80	15800	6100	270	105
35	12.0	20.5	8.5	M10	9.0	M3x5	80	8.0	1.20	21100	8100	450	175

- 1) Dimension  $H_2$  with cover strip
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.
  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.
  Often only 50,000 m are actually stipulated. For comparison: Multiply the values C and M<sub>t</sub> by 1.26 according to the table.

# SKS - Slimline, short, standard height



#### R1662 ... 2.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS ball guide rails.

#### **Options and material numbers**

Size	Ball runner blocks	d class	Accura	cy class	Seals on ball runner blocks				
	with size					without ball chain			
		C0	C1	N	н	SS	LS		
15	R1662 1	9	1	4	3	20	21		
20	R1662 8	9	1	4	3	20	21		
25	R1662 2	9	1	4	3	20	21		
30	R1662 7	9	1	4	3	20	21		
35	R1662 3	9	1	4	3	20	21		
E.g.:	R1662 7		1		3	20			

#### Order example

Options:

- ► Ball runner block SKS
- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1662 713 20

#### Preload classes

C0 = Without preload (clearance)

C1 = Moderate preload

#### Seals

SS = Standard seal


LS = Low-friction seal

#### Kον

gray numbers

= No preferred variant / combination

(partially longer delivery times)

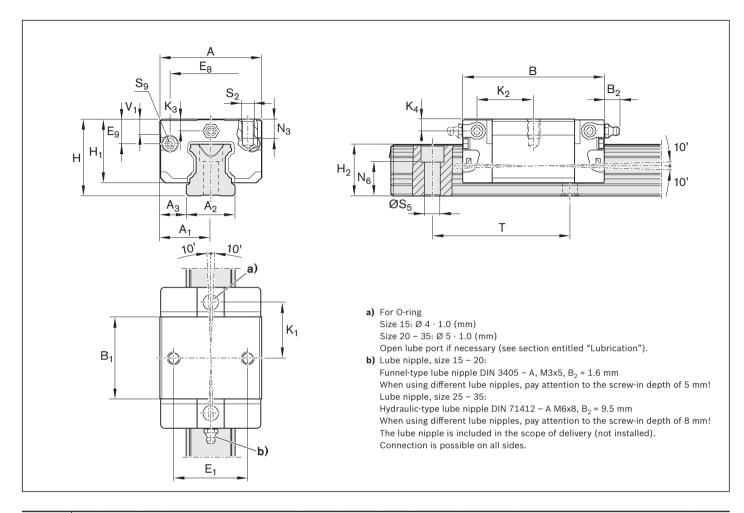

Size	Dimens	<b>ions</b> (r	nm)														
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{(2)}$	$K_1$	$K_2$	K <sub>3</sub>	$K_4$
15	34	17	15	9.5	44.7	25.7	26	24.55	6.70	24	19.90	16.30	16.20	16.25	17.85	3.20	3.20
20	44	22	20	12.0	57.3	31.9	32	32.50	7.30	30	25.35	20.75	20.55	22.95	22.95	3.35	3.35
25	48	24	23	12.5	67.0	38.6	35	38.30	11.50	36	29.90	24.45	24.25	25.35	26.50	5.50	5.50
30	60	30	28	16.0	75.3	45.0	40	48.40	14.60	42	35.35	28.55	28.35	28.80	30.50	6.05	6.05
35	70	35	34	18.0	84.9	51.4	50	58.00	17.35	48	40.40	32.15	31.85	32.70	34.20	6.90	6.90

Size	Dimens	ions (mm	1)		'			Mass	Load ratings <sup>3)</sup>	Permissible		Load moments <sup>3)</sup>
								(kg)	(N)	load (N)		(Nm)
									<b>↓ ↑</b> <b>→</b>		-	
	N <sub>3</sub>	$N_6^{\pm 0.5}$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>		С	$F_{max}$	$M_t$	$M_{t max}$
15	6.0	10.3	M4	4.5	M2.5x3.5	60	5.0	0.10	3,900	1500	39	15
20	7.5	13.2	M5	6.0	M3x5	60	6.0	0.25	10,100	3,900	130	50
25	9.0	15.2	M6	7.0	M3x5	60	7.5	0.35	11,400	4,400	170	65
30	12.0	17.0	M8	9.0	M3x5	80	7.0	0.60	15,800	6,100	270	105
35	13.0	20.5	M8	9.0	M3x5	80	8.0	0.90	21,100	8,100	450	175

- $\textbf{1)} \quad \text{Dimension H}_2 \text{ with cover strip}$
- 2) Dimension H<sub>2</sub> without cover strip
- 3) Load ratings and load moments for ball runner block without ball chain.
  Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1.
  Often only 50,000 m are actually stipulated. For comparison: Multiply the values C and M<sub>t</sub> by 1.26 according to the table.

#### Characteristic features

Rexroth ball rail systems with aluminum ball runner blocks have been developed specially for industrial robots and general machine building requiring compact, ball bearing-mounted longitudinal guides in various accuracy classes with very high load capacity and low gravity. The extremely small and lightweight guide units in five common sizes have the same high load ratings in all four main directions of loading.


#### **Highlights**

- ► High torque load capacity
- ► Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- Extra-compact lightweight design 60% less gravity due to aluminum compared to the ball runner blocks made of steel
- ► Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.

#### **Further highlights**

- ► Low noise level and outstanding travel behavior
- Excellent dynamic characteristics:
   Travel speed: v<sub>max</sub> = 5 m/s
   Acceleration: a<sub>max</sub> = 500 m/s²
- ▶ Long-term lubrication is possible over several years
- Minimum quantity lubrication with integrated reservoir for oil lubrication
- Enables greater parallelism and height offsets of mounting bases
- ► Accuracy classes H and N are combinable with all rails in each accuracy class
- ▶ Lube connection with metal thread on all sides
- ▶ End-face fastening thread for all attachments
- ► Ball guide rails of accuracy class H are also available with coated Resist CR (matt silver finish, hard chrome plated)
- Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- ► Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block<sup>1)</sup>
- ► Attachments on the ball runner block can be mounted from above and below¹)
- ► Predrilled holes on the ball runner block for pinned fitting
- ► Optionally available with ball chain
- ▶ Ball runner block pre-lubricated at the factory
- 1) Type-dependent

#### Overview

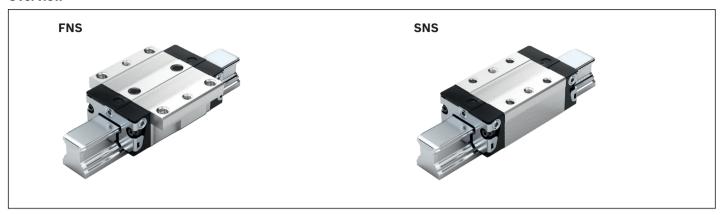

#### Definition of the format of ball runner blocks


Criterion	Designation	Code (e	xample)	
		F	N	s
Width	Flange <b>(F)</b>	F		
	Slimline (S)	S		
	Wide (B)	В		
	Compact (C)	С		
Length	Normal (N)		N	
	Long (L)		L	
	Short (K)		K	
Height	Standard height (S)			S
	High (H)			Н
	Low (N)			N



## Ball chain (optional)

▶ Optimized noise level

## FNS - flanged, normal, standard height, R1631 ... 2.

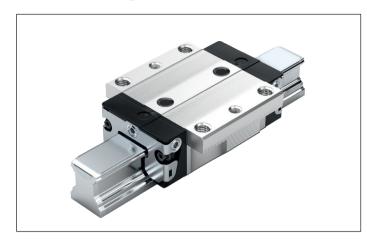

#### R1631 ... 2.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS ball guide rails.

#### Options/material numbers/technical data

Size	Ball runner blocks	Preload class		Accuracy clas	S	Seals on	ball runn	er blocks	
	with size					without I	oall	with ball	chain
						chain			
		C0	C1	N	Н	SS	LS	SS	LS
15	R1631 1	9	1	4	3	20	21	22	23
20	R1631 8	9	1	4	3	20	21	22	23
25	R1631 2	9	1	4	3	20	21	22	23
30	R1631 7	9	1	4	3	20	21	22	23
35	R1631 3	9	1	4	3	20	21	22	23
E.g.:	R1631 7		1		3	20			

Size	Load capacities¹) (N)  ↓ ↑  → □ ←	Permissible load (N)	Load moments <sup>1)</sup> (	(Nm)		
	С	F <sub>max</sub>	M <sub>t</sub>	M <sub>t max</sub>	M <sub>L</sub>	$M_{L max}$
15	9860	3000	95	29	68	16
20	23400	7200	300	92	200	50
25	28600	8800	410	125	290	70
30	36500	12200	630	210	440	110
35	51800	16200	1110	345	720	170

1) Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain along the load ratings and load moments for ball runner block with ball chain along the load ratings and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M, and M, by 1.26 according to the table.

#### Order example

#### Options:

- ▶ Ball runner blocks FNS
- ▶ Size 30
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1631 713 20

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

#### Seals

SS = Standard seal


LS = Low-friction seal

#### Key

gray numbers

= No preferred variant / combination

(partially longer delivery times)

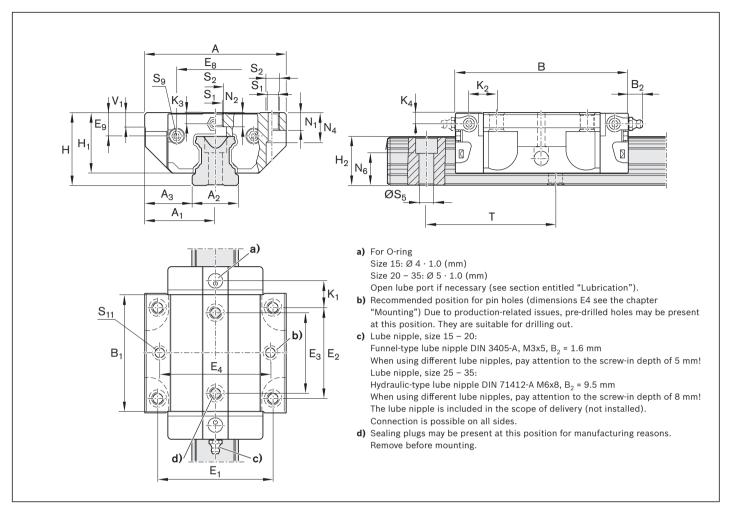


Size	Dimer	sions	(mm)																
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	$E_2$	E <sub>3</sub>	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{(2)}$	$K_1$	$K_2$	$K_3$	$K_4$
15	47	23.5	15	16.0	58.2	39.2	38	30	26	24.55	6.70	24	19.90	16.30	16.20	8.00	9.6	3.20	3.20
20	63	31.5	20	21.5	75.0	49.6	53	40	35	32.50	7.30	30	25.35	20.75	20.55	11.80	11.8	3.35	3.35
25	70	35.0	23	23.5	86.2	57.8	57	45	40	38.30	11.50	36	29.90	24.45	24.25	12.45	13.6	5.50	5.50
30	90	45.0	28	31.0	97.7	67.4	72	52	44	48.40	14.60	42	35.35	28.55	28.35	14.00	15.7	6.05	6.05
35	100	50.0	34	33.0	110.5	77.0	82	62	52	58.00	17.35	48	40.40	32.15	31.85	14.50	16.0	6.90	6.90

Size	Dimension	s (mm)		ı	1		1	,		1		Mass
	N <sub>1</sub>	$N_2$	$N_4$	$N_6^{\pm 0.5}$	$S_1$	$S_2$	S <sub>5</sub>	S <sub>9</sub>	S <sub>11</sub>	T	V <sub>1</sub>	(kg)
15	5.2	4.40	10.3	10.3	4.3	M5	4.5	M2.5x3.5	3.7	60	5.0	0.10
20	7.7	5.20	13.5	13.2	5.3	M6	6.0	M3x5	4.7	60	6.0	0.24
25	9.3	7.00	17.8	15.2	6.7	M8	7.0	M3x5	5.7	60	7.5	0.30
30	11.0	7.90	20.5	17.0	8.5	M10	9.0	M3x5	7.7	80	7.0	0.55
35	12.0	10.15	24.0	20.5	8.5	M10	9.0	M3x5	7.7	80	8.0	0.75

- 1) Dimension H<sub>2</sub> with cover strip
- 2) Dimension  $H_2$  without cover strip

## SNS - Slimline, normal, standard height, R1632 ... 2.

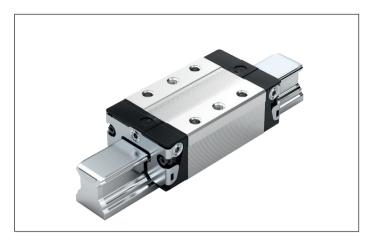

#### R1632 ... 2.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication

▶ Pre-lubricated

#### Note

Can be used on all SNS ball guide rails.

#### Options/material numbers/technical data

Size	Ball runner blocks	Preload class		Accuracy clas	is	Seals on	ball runn	er blocks	
	with size					without l	oall	with ball	chain
		CO	C1	N	н	SS	LS	SS	LS
15	R1632 1	9	1	4	3	20	21	22	23
20	R1632 8	9	1	4	3	20	21	22	23
25	R1632 2	9	1	4	3	20	21	22	23
30	R1632 7	9	1	4	3	20	21	22	23
35	R1632 3	9	1	4	3	20	21	22	23
E.g.:	R1632 7		1		3	20			

Size	Load capacities <sup>1)</sup> (N)	Permissible load (N)	Load moments <sup>1)</sup> (	Nm)		
	<b>↓ ↑</b> → □ ←					
	С	F <sub>max</sub>	M <sub>t</sub>	M <sub>t max</sub>	M <sub>L</sub>	M <sub>L max</sub>
15	9860		95	29	68	16
20	23400	7200	300	92	200	50
25	28600	8800	410	125	290	70
30	36500	12200	630	210	440	110
35	51800	16200	1110	345	720	170

#### Order example

#### Options:

- ▶ Ball runner blocks SNS
- ▶ Size 30
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1632 713 20

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

#### Seals

SS = Standard seal


LS = Low-friction seal

#### Key

gray numbers

No preferred variant / combination

(partially longer delivery times)

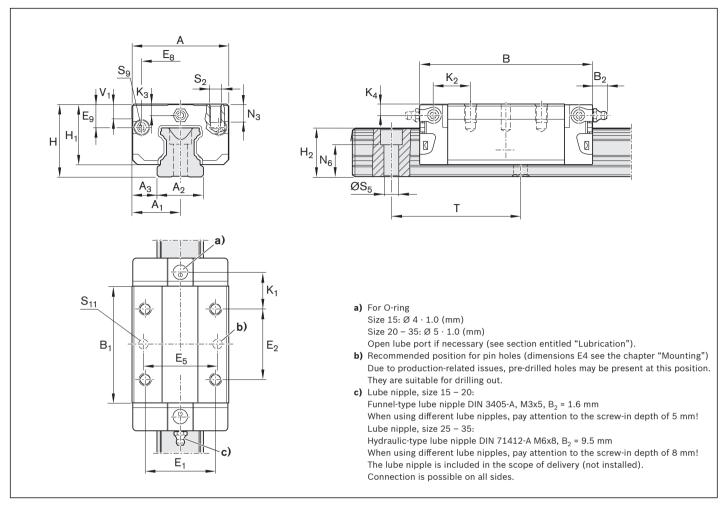

Size	Dimer	nsions	s (mm	າ)													'	
	Α	$A_1$	$A_2$	$A_3$	B <sup>+0.5</sup>	$B_1$	$E_1$	$\mathbf{E_2}$	E <sub>8</sub>	E <sub>9</sub>	Н	H <sub>1</sub>	$H_{2}^{1)}$	$H_2^{(2)}$	K <sub>1</sub>	$K_2$	$K_3$	$K_4$
15	34	17	15	9.5	58.2	39.2	26	26	24.55	6.70	24	19.90	16.30	16.20	10.00	11.60	3.20	3.20
20	44	22	20	12.0	75.0	49.6	32	36	32.50	7.30	30	25.35	20.75	20.55	13.80	13.80	3.35	3.35
25	48	24	23	12.5	86.2	57.8	35	35	38.30	11.50	36	29.90	24.45	24.25	17.45	18.60	5.50	5.50
30	60	30	28	16.0	97.7	67.4	40	40	48.40	14.60	42	35.35	28.55	28.35	20.00	21.70	6.05	6.05
35	70	35	34	18.0	110.5	77.0	50	50	58.00	17.35	48	40.40	32.15	31.85	20.50	22.00	6.90	6.90


Size	Dimensions (mm)	1							Mass
	N <sub>3</sub>	N <sub>6</sub> <sup>±0.5</sup>	$S_2$	S <sub>5</sub>	S <sub>9</sub>	S <sub>11</sub>	Т	V <sub>1</sub>	(kg)
15	6.0	10.3	M4	4.5	M2.5x3.5	3.7	60	5.0	0.10
20	7.5	13.2	M5	6.0	M3x5	4.7	60	6.0	0.20
25	9.0	15.2	M6	7.0	M3x5	5.7	60	7.5	0.35
30	12.0	17.0	M8	9.0	M3x5	7.7	80	7.0	0.45
35	13.0	20.5	M8	9.0	M3x5	7.7	80	8.0	0.65

- 1) Dimension  $H_2$  with cover strip
- $\textbf{2)} \quad \text{Dimension H}_2 \text{ without cover strip}$

# General notes on corrosion resistant ball runner block, Resist NR

- ▶ As Resist NR is not a coating, all dimensions and tolerances, dynamic characteristics, load capacities, rigidity and moments are identical to the standard steel version.
  - For material numbers, please refer to the following page.
- ► Can be used on all SNS/SNO ball guide rails.
- ► Ball runner block body made of corrosion resistant steel as per DIN EN 10088 Version recommended by Rexroth if corrosion protection is required. Fast delivery.
- Pre-lubricated

#### **Overview of formats**

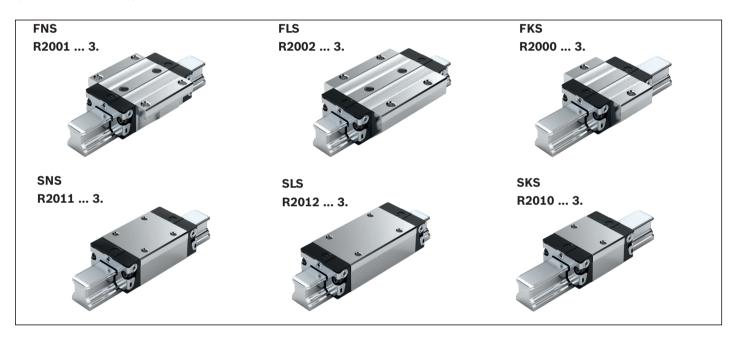

#### **Definition of the format of ball runner blocks**

Criterion	Designation	Code (exa	ample)	
		F	N	S
Width	Flange <b>(F)</b>	F		
	Slimline (S)	S		
	Wide (B)	В		
	Compact (C)	С		
Length	Normal (N)		N	
	Long (L)		L	
	Short (K)		K	
Height	Standard height <b>(S)</b>			S
	High (H)			Н
	Low (N)			N



#### **Ball chain (optional)**

▶ Optimized noise level

# FNS, FLS, FKS, SNS, SLS, SKS

Format	Size	Ball runner	Preload clas	s	Accuracy class	Seals o	n ball runi	ner blo	cks		
		blocks with					t ball chair		with bal		
		size	C0	C1	F	i ss	i LS	DS	SS	LS	DS
FNS	15	R2001 1	9	_		3 30	31	_	32	33	_
	20	R2001 8	9	_	3	3 30	31	_	32	33	_
	25	R2001 2	9	_		3 30	31	_	32	33	
	30	R2001 7	9			3 30		_	32	33	
	30	11/2001 /		1		3 30		3Z	32	33	3Y
	05	D0001.0									
	35	R2001 3	9			30		_	32	33	_
				1		3 30		3Z	32	33	3Y
	E.g.:	R2001 7		1	3	30					
FLS	15	R2002 1	9	_		3 30	31	_	32	33	_
	20	R2002 8	9	_	3	3 30	31	_	32	33	
	25	R2002 2	9	_		3 30		_	32	33	
	30	R2002 7	9			3 30		_	32	33	
	30	N2002 /	9	1		3 30			32	33	
	35	R2002 3	9			3 30		- 52	32	33	
		1120020		1		3 30		3Z	32	33	3Y
FKS	15	R2000 1	9	_		3 30	31	_	32	33	_
	20	R2000 8	9	_	:	3 30	31	_	32	33	_
	25	R2000 2	9	_		3 30		_	32	33	
	30	R2000 7	9			3 30		_	32	33	_
				1		30		3Z	32	33	3Y
	35	R2000 3	9			3 30		_	32	33	
				1		3 30	31	3Z	32	33	3Y
SNS	15	R2011 1	9	_	1	3 30	31		32	33	
3143	20	R2011 1	9			3 30			32	33	
	25	R2011 8	9			3 30		_	32	33	
	30	R2011 7	9			3 30		_	32	33	_
		1120117		1		3 30		3Z	32	33	3Y
	35	R2011 3	9			3 30		_	32	33	_
				1	;	3 30	31	3Z	32	33	3Y
	1	laas:			1	-1 :					
SLS	15	R2012 1	9			3 30			32	33	
	20	R2012 8	9			3 30			32	33	_
	25 30	R2012 2 R2012 7	9			3 30			32	33	
	30	R2012 /	9	1		3 30		3Z	32	33	
	35	R2012 3	9			3 30		- 32	32	33	
	33	112012 5	3	1		3 30		3Z	32	33	3Y
SKS	15	R2010 1	9		;	3 30		_	32	33	
	20	R2010 8	9			3 30		_	32	33	_
	25	R2010 2	9	_		3 30	31	_	32	33	_
	30	R2010 7	9		3	3 30		_	32	33	_
				1		3 30		3Z	32	33	3Y
	35	R2010 3	9			3 30			32	33	-
				1	1 3	30	31	3Z	32	33	3Y

#### **Order example FNS**

Options:

- ▶ Ball runner block BSHP Resist NR, FNS
- Size 30
- Preload class C1
- ► Accuracy class H
- ▶ With standard seal, without ball chain

Material number: R2001 713 30

#### Note

Dimensions, dimensional drawing, load ratings, rigidity and moments see standard ball runner block BSHP

#### **Preload classes**

C0 = Without preload (clearance) C1 = Moderate preload

#### Seals

SS = Standard seal LS = Low-friction seal DS = Double-lip seal

#### Key

= No preferred variant / combination (partially longer delivery times)

gray numbers

#### Characteristic features

Ball rail systems Resist NR II made of corrosion resistant steel<sup>1)</sup> are used specifically in conjunction with water-based media, heavily diluted acidic materials, alkali or saline solutions. These guideways are also ideally suitable for use at relative humidities above 70 % and temperatures exceeding 30 °C.

Such conditions are found mainly in cleaning plants, electroplating and pickling lines, vapor degreasing plants and refrigeration systems.

Since no additional corrosion protection is required, ball rail systems Resist NR II are ideally suited for use in clean rooms and general printed circuit board manufacturing. They are also suitable for other applications in the general packaging industry.

#### General notes on ball runner blocks Resist NR II

- ► Can be used on all SNS ball guide rails, not initially lubricated, not preserved
- ► For dimensions see corresponding ball runner blocks made of steel

#### **Highlights**

- ▶ All metal parts are made of corrosion resistant steel
- Available in five common sizes
- ► Excellent dynamic characteristics:

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ 

- ▶ The same high load ratings in all four main directions of loading
- ▶ Available in accuracy classes N, H and P, up to preload class C2
- ▶ Long-term lubrication is possible over several years
- ▶ Minimum quantity lubrication system with integrated reservoir for oil lubrication
- ▶ Lube fittings with metal threads on all sides
- Optionally available with ball chain

#### 1) Resist NR II:

Ball runner block body and ball guide rail as well as all steel parts made of corrosion resistant steel in accordance with DIN EN 10088

#### **General notes**

- ▶ Ball rail systems for sectors of the food industry, see the ball rail systems NRFG catalog R310DE2226 (2011.04).
- Combinations of different accuracy classes Combining ball guide rails and ball runner blocks of different accuracy classes results in different tolerances for the dimensions H and A3. See "Accuracy classes and their tolerances."
- ► Combinations of different materials


Combining ball guide rails and ball runner blocks made of different materials will change the load ratings, permitted loads and load moments. The lower value must be used in each case.

#### **Further highlights**

- ▶ Limitless interchangeability as all ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class (also made of steel, aluminum, Resist NR or Resist CR).
- Maximum system rigidity due to preloaded O-arrangement
- ► Existing range of accessories fully usable
- ▶ Attachments on the ball runner block can be mounted from above and below<sup>2)</sup>
- ▶ Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block2)
- ► End-face fastening thread for all attachments
- ▶ High rigidity in all load directions permits applications with just one runner block per rail
- ► Integrated all-round sealing
- ▶ Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway
- Ball guide rail Resist NR II, with or without cover strip, available for mounting from above and below
- Ball runner block also available with chrome-plated ball guide rails

#### 2) Type-dependent

#### **Overview of formats**

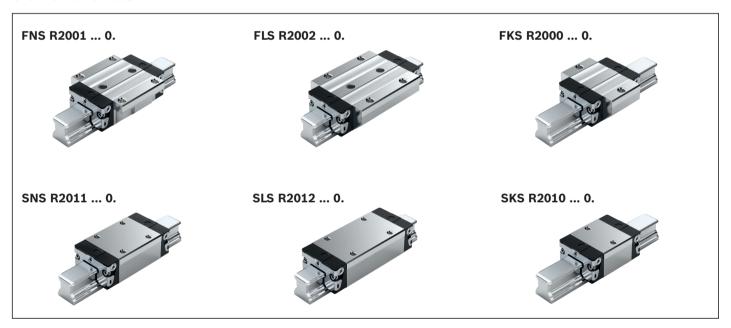

#### Definition of the format of ball runner blocks

Criterion	Designation	Code	(example)		
		F	N	S	
Width	Flange <b>(F)</b>	F			
	Slimline (S)	S			
	Wide (B)	В			
	Compact (C)	С			
Length	Normal (N)		N		
	Long (L)		L		
	Short (K)		K		
Height	Standard height (S)			S	
	High (H)			Н	
	Low (N)			N	



#### **Ball chain (optional)**

▶ Optimized noise level

## FNS, FLS, FKS, SNS, SLS, SKS

Size	Ball	Prel	oad		Accı	uracy	,	Seals	on ba	ll runr	er blo	cks			Load ra	tings <sup>2)</sup>	Load n	noment	<b>s<sup>2)</sup></b> (Nm)	
	runner	clas	S		clas	S		witho	ut ball		with b	oall cha	nin	(kg)		<u>†</u>				
	with size	CO	C1	C2	N I	н	Р	chain SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS	m	С	C <sub>o</sub>	M.	M <sub>to</sub>	$M_L$	M <sub>L0</sub>
FNS			-				·	- 00									···t	···to	L	L0
15	R2001 1	9			4	3	_	04	05	_	06	07	-	0.20	5100	9300	63	90	34	49
			1		4	3	2	04	05	OX	06	07	OW							
				2	-	3	2	04	_	ΟX	06	_	OW							
20	R2001 8	9			4	3	_	04	05	_	06	07	-	0.45	12300	16900	205	215	110	115
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	_	0X	06	_	OW							
25	R2001 2	9			4	3	_	04	05	_	06	07	-	0.65	15000	21000	270	295	150	165
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	_	0X	06	_	OW							
30	R2001 7	9			4	3	_	04	05	_	06	07	-	1.10	20800	28700	460	500	245	265
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	-	0X	06	_	OW							
35	R2001 3	9			4	3	_	04	05	_	06	07	-	1.60	27600	37500	760	805	375	390
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	-	0X	06	_	OW							
FLS																				
15	R2002 1	9			4	3	_	04	05	_	06	07	-	0.30	8500	14000	82	132	64	104
			1		4	3	2	04	05	ΟX	06	07	OW							
				2	-	3	2	04	-	0X	06	_	OW							
20	R2002 8	9			4	3	_	04	05	_	06	07	_	0.55	16000	24400	265	310	190	230
			1		4	3	2	04	05	ΟX	06	07	OW							
				2	-	3	2	04	_	ΟX	06	_	OW							
25	R2002 2	9			4	3	_	04	05	_	06	07	-	0.90	20000	31600	365	450	290	350
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	_	0X	06	_	OW							
30	R2002 7	9			4	3	_	04	05	_	06	07	-	1.50	26300	40100	590	695	420	495
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	_	0X	06	_	OW							
35	R2002 3	9			4	3	_	04	05	_	06	07	-	2.25	36500	56200	1 025	1210	710	840
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	_	0X	06	_	OW							
FKS																,				
15	R2000 1	9			4	3	_	04	05	_	06	07	-1	0.15	4500	5600	44	55	16	19
			1		4	3	_	04	05	0X	06	07	OW							
				_	-	-	_	_	_	_	_	_	_							
20	R2000 8	9			4	3	_	04	05	_	06	07	-	0.30	8200	9400	125	115	45	40
			1		4	3	_	04	05	0X	06	07	OW							
				-	-	-	_	-	-	_	_	_								
25	R2000 2	9			4	3	_	04	05	_	06	07	-	0.50	10500	12600	195	180	70	65
			1		4	3	_	04	05	0X	06	07	OW							
				_	-	-	_	_	-	_	_	_	_							
30	R2000 7	9			4	3	_	04	05	_	06	07	_	0.80	14500	17200	320	295	110	105
			1		4	3	_	04	05	OX	06	07	OW							
				_	-	-	-	-	_	_	-	-	_							
35	R2000 3	9			4	3	_	04	05	_	06	07	-	1.20	19300	22400	545	485	170	150
			1		4	3	-	04	05	OX	06	07	OW							
	1	$\vdash$													I	1	1			

#### Order example

Options:

- ▶ Ball runner block BSHP Resist NR II, SKS
- ▶ Size 30
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number: R2010 713 04

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload

#### Key

gray numbers

= No preferred variant / combination

(partially longer delivery times)

#### Seals

SS = Standard seal

LS = Low-friction seal

DS = Double-lip seal

Size	Ball runner	Preload class			Accu	-	′	Seals	on bal	l runr	er blo	cks		Mass (kg)	Load ra	_	Load n	nomen	ts <sup>2)</sup> (Nm)	
	blocks with size	o.us	•		Olubo			witho	ut ball		with b	all ch	ain	(116)	\(\(\)\ → \[\]	<u></u>	Ĺ			
		CO	C1	C2	N	Н	Р	SS	LS <sup>1)</sup>	DS	SS	LS <sup>1)</sup>	DS	m	С	C <sub>o</sub>	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	$M_{L0}$
SNS																				
15	R2011 1	9			4	3	-	04	05	-	06	07	-	0.15	5100	9300	63	90	34	49
			1		4	3	2		05	0X	06	07	OW							
				2	-	3	2	04	-	OX	06	-	OW							
20	R2011 8	9			4	3	-	04	05	-	06	07	_	0.35	12300	16900	205	215	110	115
			1		4	3	2	04	05	OX	06	07	OW							
				2	-	3	2	04	_	0X	06	-	OW							
25	R2011 2	9			4	3	_	04	05	_	06	07	_	0.50	15000	21000	270	295	150	165
			1		4	3	2		05	OX	06	07	OW							
				2	-	3	2	04	-	0X	06	-	OW							
30	R2011 7	9			4	3	-	04	05	_	06	07	_	0.85	20800	28700	460	500	245	265
			1		4	3	2	04	05	OX	06	07	OW							
				2	-	3	2	04	-	OX	06	-	OW							
35	R2011 3	9			4	3	_	04	05	_	06	07	-	1.25	27600	37500	760	805	375	390
			1		4	3	2	04	05	OX	06	07	OW							
				2	-	3	2	04	-	OX	06	-	OW							
SLS																				
15	R2012 1	9			4	3	_	04	05	-	06	07	-1	0.20	8500	14000	82	132	64	104
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	_	0X	06	-	OW							
20	R2012 8	9			4	3	-	04	05	_	06	07	-	0.45	16000	24400	265	310	190	230
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	-	0X	06	-	OW							
25	R2012 2	9			4	3	_	04	05	_	06	07	-	0.65	20000	31600	365	450	290	350
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	-	0X	06	-	OW							
30	R2012 7	9			4	3	-	04	05	-	06	07	-	1.10	26300	40100	590	695	420	495
			1		4	3	2	04	05	OX	06	07	OW							
				2	-	3	2	04	-	0X	06	-	OW							
35	R2012 3	9			4	3	_	04	05	_	06	07	-	1.70	36500	56200	1 025	1210	710	840
			1		4	3	2	04	05	0X	06	07	OW							
				2	-	3	2	04	-	0X	06	-	OW							
SKS															•					
15	R2010 1	9			4	3	-	04	05	-	06	07	-	0.10	4500	5600	44	55	16	19
			1		4	3	_	04	05	0X	06	07	OW							
				_	-	-	-	_	_	_	_	-	_							
20	R2010 8	9			4	3	_	04	05	-	06	07	-	0.25	8200	9400	125	115	45	40
			1		4	3	_	04	05	OX	06	07	OW							
				_	-	-	_	_	_	_	_	-	-							
25	R2010 2	9			4	3	_	04	05	_	06	07	_	0.35	10500	12600	195	180	70	65
			1		4	3	_	04	05	OX	06	07	OW							
				_	-		_	_	_	_	_	-	_							
30	R2010 7	9			4	3	_	04	05	_	06	07	-	0.60	14500	17200	320	295	110	105
			1		4	3	_	04	05	0X	06	07	OW							
				_	-	-[	_	_	-	_	_	-	_							
35	R2010 3	9			4	3	_	04	05	_	06	07	-	0.90	19300	22400	545	485	170	150
			1		4	3	-	04	05	0X	06	07	0W							
				_	-	-	_	_	-	_	_	-	-							
E.g.:	R2010 7		1			3		04												

<sup>1)</sup> Only for accuracy classes N and H

#### Note

Dimensions, dimensional drawing see standard ball runner block BSHP

<sup>2)</sup> Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🔊 🖹 14

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_{\mathrm{t}}$  and  $\mathbf{M}_{\mathrm{L}}$  by 1.26 according to the table.

#### General notes on the Resist CR ball runner block

- ► For material numbers, please refer to the following pages.
- ▶ Dimensions, dimensional drawing, dynamic characteristics, load ratings, rigidity and moments see corresponding standard ball runner blocks made of steel
- ▶ Steel ball runner block body with corrosion resistant coating, matte-silver finish, hard chrome plated.
- ▶ Pre-lubricated

For ball runner blocks and ball guide rails Resist CR, matte-silver, hard chrome plated, deviating tolerances of the dimensions H and A<sub>3</sub> are to be observed (see "Accuracy classes and their tolerances").

Recommended ball runner blocks for Resist CR ball guide rails of accuracy class H and preload class C0 and C1

Recommended ball runner blocks

Sizes 15 - 65

- ► Accuracy class H
- ► Preload class C0

Recommended ball runner blocks

Sizes 30 - 65

- Accuracy class H
- ▶ Preload class C1


#### Definition of the format of ball runner blocks

Criterion	Designation	Code (exa	ample)	
		F	N	S
Width	Flange <b>(F)</b>	F		
	Slimline (S)	S		
	Wide (B)	В		
	Compact (C)	С		
Length	Normal (N)		N	
	Long (L)		L	
	Short (K)		K	
Height	Standard height (S)			S
	High (H)			Н
	Low (N)			N



#### Ball chain (optional)

▶ Optimized noise level

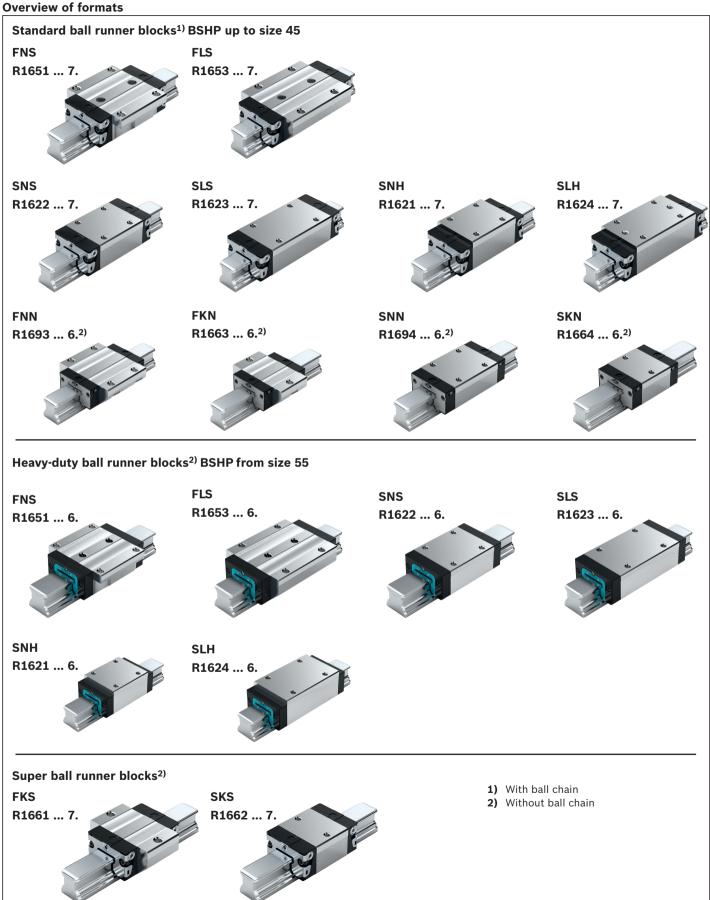

## FNS, FLS, SNS, SLS, SNH, SLH, FNN, FKN, SNN, SKN, FKS, SKS

#### Standard ball runner blocks BSHP

Format	Size	Ball runner blocks with	Preload c	lass	Accuracy class	Seals on	ball runn	er block	S		
		size				without	ball chain	1	with ball	chain	
			CO	C1	н	1	LS	DS		LS	DS
FNS	45	R1651 4	9		3	70	_	_	72	-	_
				1	3	70	_	7Z	72	-	7Y
	E.g.:	R1651 4		1	3	70					
FLS	45	R1653 4	9		3	70	_	_	72	-	_
				1	3		_	7Z		_	7Y
SNS	45	R1622 4	9		3	70	_	_	72	-	
				1	3	70	_	7Z	72	_	7Y
SLS	45	R1623 4	9		3	70	_	_	72	-	_
				1	3	70	_	7Z	72	-	7Y
SNH	15	R1621 1	9	_	3	70	71	_	72	73	_
	25	R1621 2	9	_	3	70	71	_	72	73	_
	30	R1621 7	9		3	70	71	_	72	73	_
				1		70	71	7Z	72	73	7Y -
	35	R1621 3	9		3	1	71	_	72	73	
	45	R1621 4	9	1	3	70 70	71	7Z	72 72	73	7Y
	45	K1021 4		1	3	70	_	7Z		_	7Y
SLH	25	R1624 2	9	_	3	70	71	_	72	73	_
	30	R1624 7	9		3	1	71	_	72	73	_
				1		70	71	7Z	1	73	7Y
	35	R1624 3	9		3	70	71	_	72	73	_
				1		70	71	7Z		73	7Y
	45	R1624 4	9		3	70	_	_	72	_	_
				1		70	_	7Z	72	-	7Y
FNN	20	R1693 8	9	_	3		_	_	_	-	_
	25	R1693 2	9	_	3	60	_	_	_	_	_
FKN	20	R1663 8	9	_	3	60	_	_	_	-	_
	25	R1663 2	9	_	3	60	_	_	_	-	_
SNN	20	R1694 8	9	_	3		_	_	_	-	_
	25	R1694 2	9	_	3	60	_	-	-	_	-
SKN	20	R1664 8	9	_	3	60	_	_	_	-	_
	25	R1664 2	9	-	3	60	-	_	-	-	_

## Order example

Options:

- Ball runner block BSHP Resist CR, FNS
- Size 45
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number: R1651 413 70

#### Preload classes

C0 = Without preload (clearance) C1 = Moderate preload

#### Seals

SS = Standard seal LS = Low-friction seal

DS = Double-lip seal

gray numbers

No preferred variant / combination (partially longer delivery times)

## **Heavy-duty BSHP ball runner blocks**

Format	Size	Ball runner blocks with size	Preload class		Accuracy class	Seals on ball runner blocks without ball chain
			CO	C1	Н	SS
FNS	55	R1651 5	9	1	3	60
	65	R1651 6	9	1	3	60
FLS	55	R1653 5	9	1	3	60
	65	R1653 6	9	1	3	60
	·					
SNS	55	R1622 5	9	1	3	60
	65	R1622 6	9	1	3	60
SLS	55	R1623 5	9	1	3	60
	65	R1623 6	9	1	3	60
SNH	55	R1621 5	9	1	3	60
01.11	lee.	D1004.5				1 00
SLH	55	R1624 5	9	1	3	60

#### Super ball runner blocks

Format Size		Ball runner blocks with size	Preload class		Accuracy class	Seals on blocks v ball chai	vithout	
			CO	C1	н	SS	LS	DS
FKS	15	R1661 1	9	-	3	70	71	
	20	R1661 8	9	_	3	70	71	_
	25	R1661 2	9	_	3	70	71	
	30	R1661 7	9		3	70	71	
				1	3	70	71	7Z
	35	R1661 3	9		3	70	71	
				1	3	70	71	7Z
SKS	15	R1662 1	9	_	3	70	71	
	20	R1662 8	9	_	3	70	71	
	25	R1662 2	9	_	3	70	71	
	30	R1662 7	9		3	70	71	
				1	3	70	71	7Z
	35	R1662 3	9		3	70	71	_
				1	3	70	71	7Z

#### Note

Dimensions, dimensional drawing, load ratings, rigidity and moments see standard/heavy-duty ball runner block BSHP and super ball runner block.

#### **Characteristic features**

- ► Maximum rigidity in all load directions
- ► High torque load capacity

#### Proven cover strip for the ball guide rail mounting holes

- ▶ One cover for all bore holes saves time and costs
- Made of corrosion resistant spring steel as per DIN EN 10088
- Easy and safe during mounting
- ▶ Clip and secure





Ball guide rails with cover strip and strip clamps made of aluminum

Without end-face threaded holes (not required)



Ball guide rails with cover strip and screwed plastic protective caps


► With threaded holes at the end faces



Ball guide rails with plastic mounting hole plugs



Ball guide rails with steel mounting hole plugs



Ball guide rails for mounting from below

#### Definition of the format of ball guide rails

Criterion	Designation	Designation Code (example)						
		S	N	S				
Width	Slimline (S)	S						
	Wide (B)	В						
Length	Normal (N)		N					
Height	Standard height (S)		,	S				
	Without groove (O)			0				

## Ordering guide rails in the recommended rail lengths

## Ordering ball guide rails in the recommended rail lengths

The procedure shown in the following ordering examples applies to all ball guide rails. Recommended rail lengths are more cost effective.

Size	Ball guide rail with size			Number of s rail length L		Pitch T (mm)	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4 mm			
		N	н	Р	SP	UP	One-piece	Composite		Maximum number of holes n <sub>B</sub>
15	R1605 13	4	3	2	1	9	31,	3.,	60	64
20	R1605 83	4	3	2	1	9	31,	3.,	60	64
25	R1605 23	4	3	2	1	9	31,	3.,	60	64
30	R1605 73	4	3	2	1	9	31,	3.,	80	48
35	R1605 33	4	3	2	1	9	61,	6.,	80	48
45	R1605 43	4	3	2	1	9	61,	6.,	105	36
55	R1605 53	4	3	2	1	9	61,	6.,	120	32
65	R1605 63	4	3	2	1	9	61,	6.,	150	25
e.g.	R1605 73		3				31, 1676			

Excerpt from table with part numbers and recommended rail lengths for ordering example

## From the desired rail length to the recommended length

$$L = \left(\frac{L_W}{T}\right)^* \cdot T - 4$$


\* Round up quotient L<sub>W</sub>/T to the nearest whole number!

#### **Calculation example**

$$L = \left(\frac{1660}{80 \text{ mm}}\right) \cdot 80 \text{ mm} - 4 \text{ mm}$$

 $L = 21 \cdot 80 \text{ mm} - 4 \text{ mm}$ 

 $L = 1676 \, \text{mm}$ 

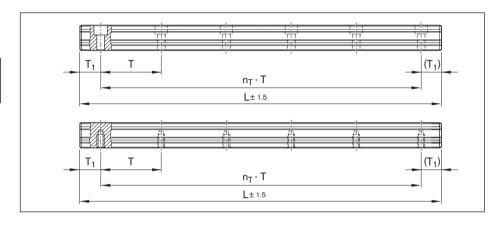

Basis: Number of holes

$$L = n_B \cdot T - 4 \text{ mm}$$

Basis: Number of spaces

$$L = n_{T} \cdot T + 2 \cdot T_{1S}$$

- L = Recommended rail length (mm)
  - , = Desired rail length (mm)
- $\Gamma$  = Pitch (mm)
- $T_{1S}$  = Preferred dimension (mm)
- $n_{\rm B}$  = Number of holes (-)
- $I_{T}$  = Number of spaces (-)

#### Notes on ordering examples

If preferred dimension  $T_{\rm 1S}$  is not used, it is possible to choose between:

- Select end spacing T<sub>1</sub> between T<sub>1S</sub> and T<sub>1 min</sub>
- ▶ As an alternative, it is possible to choose end spacings T<sub>1</sub> to T<sub>1 max</sub>

#### Ordering example 1 (to $L_{max}$ )

- Ball guide rail SNS size 30 with cover strip and strip clamps
- ► Accuracy class H
- Calculated rail length 1676 mm, (20 · T, preferred dimension T<sub>1S</sub> = 38 mm; number of holes n<sub>B</sub> = 21)

#### Ordering data

Part number; rail length (mm)  $T_1 / n_T \cdot T / T_1$  (mm)

R1605 733 31, 1676 mm 38 / 20 · 80 / 38 mm

#### Ordering example 2 (above $L_{max}$ )

- Ball guide rail SNS size 30 with cover strip and strip clamps
- ► Accuracy class H
- Calculated rail length 5116 mm, 2 partial sections (63 · T, preferred dimension T<sub>1S</sub> = 38 mm; number of holes n<sub>B</sub> = 64)

#### **Ordering data**

Material number with number of partial sections, rail length (mm)  $T_1 / n_T \cdot T / T_1$  (mm)

R1605 733 32, 5116 mm 38 / 63 · 80 / 38 mm

In the case of rail lengths above  $L_{max}$ , partial sections approved by Rexroth are joined together.

## SNS/SNO with cover strip and strip clamps



R1605 .3. ../ R1605 .B. ..

For mounting from above, with cover strip made of corrosion-resistant spring steel as per DIN EN 10088 and aluminium strip clamps (without threaded holes on end faces)

#### **Notes**

- ► Secure the cover strip!
- ▶ Strip clamps included in scope of delivery.
- ▶ Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".
- ► Composite ball guide rail also available.

#### Further ball guide rails SNS/SNO and accessories available.

► Cover strip, protective caps (see accessories for ball guide rails)

Ball guide rails SNO R1605 .B. .. with smooth base area for mounting surfaces from cast mineral parts In sizes 25-45 and available in accuracy class P and SP.

#### **Options and material numbers**

Size	Ball guide rail with size	Accu	racy o	lass			Number of par Rail length L (	rtial sections ., mm),	Spacing T (mm)	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4 mm
		N	н	Р	SP	UP	One-piece	Composite		Maximum number of holes n <sub>B</sub>
15	R1605 13	4	3	2	1	9	31,	3.,	60	64
20	R1605 83	4	3	2	1	9	31,	3.,	60	64
25	R1605 23	4	3	2	1	9	31,	3.,	60	64
30	R1605 73	4	3	2	1	9	31,	3.,	80	48
35	R1605 33	4	3	2	1	9	61,	6.,	80	48
45	R1605 43	4	3	2	1	9	61,	6.,	105	36
55	R1605 53	4	3	2	1	9	61,	6.,	120	32
65	R1605 63	4	3	2	1	9	61,	6.,	150	25
E.g.:	R1605 73		3				31, 1676			

#### Ordering example 1 (to $L_{max}$ )

#### Options:

- ► Ball guide rail SNS
- ▶ Size 30
- Accuracy class H
- One-piece
- ► Rail length

L = 1676 mm

Material number:

R1605 733 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

Options:

- ► Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ 2 partial sections
- ► Rail length

L = 5116 mm

Material number:

R1605 733 32, 5116 mm

#### Ordering example 3

(up to  $L_{\text{max}}$ , with smooth surface)


Options:

- ► Ball guide rail SNO
- ▶ Size 30
- ► Accuracy class H
- ▶ One-piece
- ▶ Rail length

L = 1676 mm

Material number:

R1605 7B3 31, 1676 mm

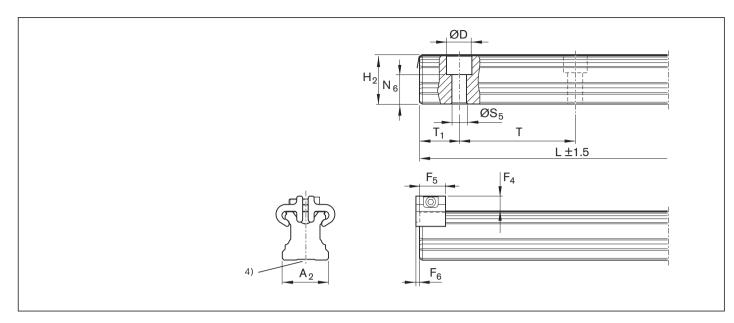

Size	Dimension	ns (mm)						-			-			Mass m
	A <sub>2</sub>	D	$F_4^{2)}$	$F_5$	$F_6$	$H_{2}^{1)}$	$L_{max}$	$N_6^{\pm0.5}$	$S_5$	Т	T <sub>1 min</sub>	T <sub>1S</sub> 3)	T <sub>1 max</sub>	(kg/m)
15	15	7.4	7.3	12	2.0	16.30	3 836	10.3	4.5	60	12	28.0	50	1.4
20	20	9.4	7.1	12	2.0	20.75	5 816	13.2	6.0	60	13	28.0	50	2.4
25	23	11.0	8.2	13	2.0	24.45	5 816	15.2	7.0	60	13	28.0	50	3.2
30	28	15.0	8.7	13	2.0	28.55	5 836	17.0	9.0	80	16	38.0	68	5.0
35	34	15.0	11.7	16	2.2	32.15	5 836	20.5	9.0	80	16	38.0	68	6.8
45	45	20.0	12.5	18	2.2	40.15	5 771	23.5	14.0	105	18	50.5	89	10.5
55	53	24.0	14.0	17	3.2	48.15	3 836	29.0	16.0	120	20	58.0	102	16.2
65	63	26.0	15.0	17	3.2	60.15	3 746	38.5	18.0	150	21	73.0	130	22.4

- 1) Dimension H<sub>2</sub> with cover strip Size 15 with cover strip 0.1 mm Size 20 - 30 with cover strip 0.2 mmSize 35-65 with cover strip 0.3 mm
- 2) Dimension H<sub>4</sub> with cover strip
- 3) Preferred dimension T<sub>1S</sub> with tolerances ± 0.75 recommended.
   4) Ball guide rails SNO with smooth base surface (without base groove).

## SNS/SNO with cover strip and protective caps



R1605 .6. ../ R1605 .D. ..

For mounting from above, with cover strip made of corrosion-resistant spring steel as per DIN EN 10088 and screw-down plastic protective caps (with threaded mounting holes on end faces)

#### **Notes**

- Secure the cover strip!
- Protective caps with screws and washers are included in the scope of delivery.
- ▶ Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".
- ► Composite ball guide rail also available.

#### Further ball guide rails SNS/SNO and accessories

► Cover strip, protective caps (see accessories for ball guide rails)

Ball guide rails SNO R1605 .D. .. with smooth base area for mounting surfaces from cast mineral parts In sizes 25-45 and available in accuracy class P and SP.

#### **Options and material numbers**

Size	Ball guide rail with size		racy	class			Number of par Rail length L (I		Spacing T (mm)	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4 mm
		N	н	Р	SP	UP	One-piece	Composite		Maximum number of holes n <sub>B</sub>
15	R1605 16	4	3	2	1	9	31,	3.,	60	64
20	R1605 86	4	3	2	1	9	31,	3.,	60	64
25	R1605 26	4	3	2	1	9	31,	3.,	60	64
30	R1605 76	4	3	2	1	9	31,	3.,	80	48
35	R1605 36	4	3	2	1	9	61,	6.,	80	48
45	R1605 46	4	3	2	1	9	61,	6.,	105	36
55	R1605 56	4	3	2	1	9	61,	6.,	120	32
65	R1605 66	4	3	2	1	9	61,	6.,	150	25
E.g.:	R1605.76		3				31 1676			

#### Ordering example 1 (to L<sub>max</sub>)

#### Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- Accuracy class H
- One-piece
- Rail length

 $I = 1676 \, \text{mm}$ Material number:

R1605 763 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

Options:

- ► Ball guide rail SNS
- ▶ Size 30
- Accuracy class H
- ▶ 2 partial sections
- ► Rail length

L = 5116 mm

Material number:

R1605 763 32, 5116 mm

#### Ordering example 3

#### (up to $L_{max}$ , with smooth surface)


Options:

- ► Ball guide rail SNO
- ▶ Size 30
- Accuracy class H
- One-piece
- ▶ Rail length

I = 1676 mm

Material number:

R1605 7**D**3 31, 1676 mm

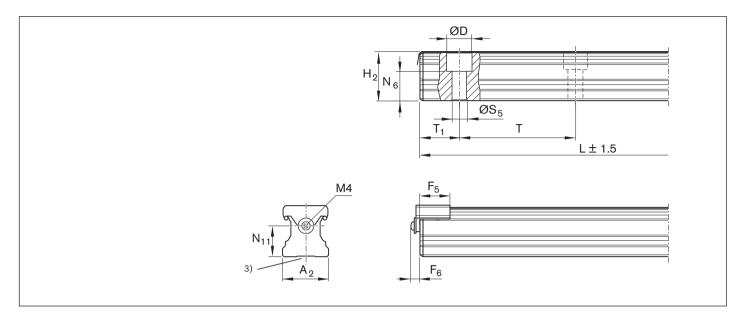

Size	Dimensio	ns (mm)												Mass m
	A <sub>2</sub>	D	F <sub>5</sub>	$F_6$	$H_2^{1)}$	$\mathbf{L}_{max}$	$N_6^{\pm0.5}$	N <sub>11</sub>	S <sub>5</sub>	Т	T <sub>1 min</sub> <sup>2)</sup>	T <sub>1S</sub> 4)	T <sub>1 max</sub>	(kg/m)
15	15	7.4	14.0	6.5	16.30	3 836	10.3	9.8	4.5	60	12	28.0	50	1.4
20	20	9.4	14.0	6.5	20.75	5 816	13.2	13.0	6.0	60	13	28.0	50	2.4
25	23	11.0	15.2	6.5	24.45	5 816	15.2	15.0	7.0	60	13	28.0	50	3.2
30	28	15.0	15.2	7.0	28.55	5 836	17.0	18.0	9.0	80	16	38.0	68	5.0
35	34	15.0	18.0	7.0	32.15	5 836	20.5	22.0	9.0	80	16	38.0	68	6.8
45	45	20.0	20.0	7.0	40.15	5 771	23.5	30.0	14.0	105	18	50.5	89	10.5
55	53	24.0	20.0	7.0	48.15	3 836	29.0	30.0	16.0	120	20	58.0	102	16.2
65	63	26.0	20.0	7.0	60.15	3 746	38.5	40.0	18.0	150	21	73.0	130	22.4

- 1) Dimension  $H_2$  with cover strip
  - Size 15 with cover strip 0.1 mm
  - Size 20 30 with cover strip 0.2 mm
  - Size 35 65 with cover strip 0.3 mm
- 2) For end spaces below  $T_{1min}$ , no threaded holes in end faces possible. Secure the cover strip.
- 3) Ball guide rails SNO with smooth base surface (without base groove).
- 4) Preferred dimension T1S with tolerances ± 0.75 recommended.

## SNS/SNO with plastic mounting hole plugs



R1605 .0. ../ R1605 .C. ..

#### For mounting from above with plastic mounting hole plugs

#### **Notes**

- Plastic mounting hole plugs included in scope of supply.
- Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."
- ► Composite ball guide rail also available.

#### Further ball guide rails SNS and accessories

- ► Corrosion resistant ball guide rails Resist NR, Resist CR
- ▶ Mounting hole plugs made of plastic, see accessories for ball guide rails

Ball guide rails SNO R1605 .C. .. with smooth base area for mounting surfaces from cast mineral parts In sizes 25-45 and available in accuracy class P and SP.

#### **Options and material numbers**

Size	Ball guide rail with size	Accu	racy (	class			Number of partial sections ., S Rail length L (mm),		Spacing T (mm)	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4 mm
		N	н	Р	SP	UP	One-piece	Composite		Maximum number of holes n <sub>B</sub>
15	R1605 10	4	3	2	1	9	31,	3.,	60	64
20	R1605 80	4	3	2	1	9	31,	3.,	60	64
25	R1605 20	4	3	2	1	9	31,	3.,	60	64
30	R1605 70	4	3	2	1	9	31,	3.,	80	48
35	R1605 30	4	3	2	1	9	31,	3.,	80	48
45	R1605 40	4	3	2	1	9	31,	3.,	105	36
55	R1605 50	4	3	2	1	9	31,	3.,	120	32
65	R1605 60	4	3	2	1	9	31,	3.,	150	25
E.g.:	R1605 70		3				31, 1676			

#### Ordering example 1 (to $L_{max}$ )

#### Options:

- ▶ Ball guide rail SNS
- ▶ Size 30
- Accuracy class H
- ▶ One-piece
- ► Rail length

L = 1676 mm

Material number:

R1605 703 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

#### Options:

- ► Ball guide rail SNS
- ▶ Size 30
- ▶ Accuracy class H
- ▶ 2 partial sections
- ► Rail length

L = 5116 mm

Material number:

R1605 703 32, 5116 mm

#### Ordering example 3

(up to  $L_{max}$ , with smooth surface)


#### Options:

- ► Ball guide rail SNO
- Size 30
- Accuracy class H
- One-piece
- ► Rail length

L = 1676 mm

Material number:

R1605 7**C**3 31, 1676 mm

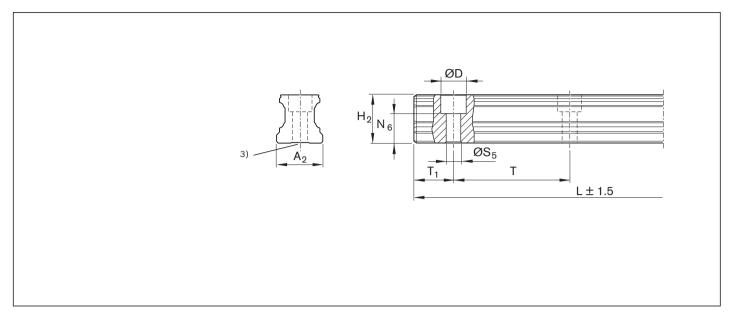

Size	Dimensions (	mm)		-							Mass m
	A <sub>2</sub>	D	$H_{2}^{1)}$	$L_{max}$	$N_6^{\pm 0.5}$	S <sub>5</sub>	Т	T <sub>1 min</sub>	T <sub>1S</sub> <sup>2)</sup>	T <sub>1 max</sub>	(kg/m)
15	15	7.4	16.20	3 836	10.3	4.5	60	10	28.0	50	1.4
20	20	9.4	20.55	5 816	13.2	6.0	60	10	28.0	50	2.4
25	23	11.0	24.25	5 816	15.2	7.0	60	10	28.0	50	3.2
30	28	15.0	28.35	5 836	17.0	9.0	80	12	38.0	68	5.0
35	34	15.0	31.85	5 836	20.5	9.0	80	12	38.0	68	6.8
45	45	20.0	39.85	5 771	23.5	14.0	105	16	50.5	89	10.5
55	53	24.0	47.85	3 836	29.0	16.0	120	18	58.0	102	16.2
65	63	26.0	59.85	3 746	38.5	18.0	150	20	73.0	130	22.4

- $\textbf{1)} \quad \text{Dimension H}_2 \text{ without cover strip}$
- 2) Preferred dimension T<sub>1S</sub> with tolerances ± 0.75 recommended.
   3) Ball guide rails SNO with smooth base surface (without base groove).

## SNS with mounting hole plugs made of steel



#### R1606 .5. ..

#### For mounting from above, for mounting hole plugs made of steel

#### **Notes**

- Mounting hole plugs made of steel not included in scope of delivery.
- ▶ Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."
- ► Composite ball guide rail also available.

#### Further ball guide rails SNS and accessories

▶ Mounting hole plugs made of steel, mounting device for mounting hole plugs made of steel see accessories for ball guide rails

#### **Options and material numbers**

Size	Ball guide rail with size	Accu				Number of par Rail length L (r	•	Spacing T (mm)	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4 mm
		N	н	Р	SP	One-piece	Composite		Maximum number of holes n <sub>B</sub>
25	R1606 25	4	3	2	1	31,	3.,	60	64
30	R1606 75	4	3	2	1	31,	3.,	80	48
35	R1606 35	4	3	2	1	31,	3.,	80	48
45	R1606 45	4	3	2	1	31,	3.,	105	36
55	R1606 55	4	3	2	1	31,	3.,	120	32
65	R1606 65	4	3	2	1	31,	3.,	150	25
E.g.:	R1606 75		3			31, 1676			

#### Ordering example 1 (to L<sub>max</sub>)

#### Options:

► Ball guide rail SNS

Size 30

► Accuracy class H

One-piece

Rail length

L = 1676 mmMaterial number:

R1606 753 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

Options:

► Ball guide rail SNS

▶ Size 30


► Accuracy class H

▶ 2 partial sections

► Rail length L = 5116 mm

Material number:

R1606 753 32, 5116 mm

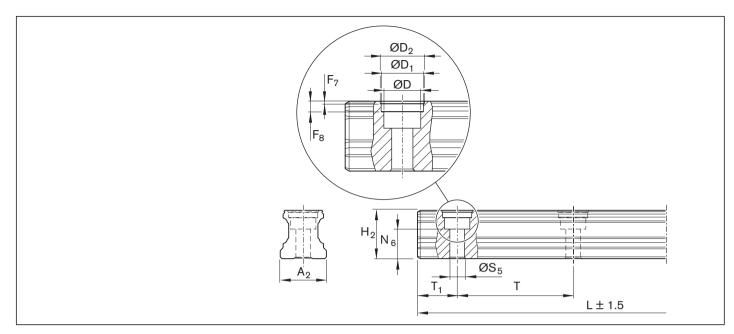

Size	Dimensio	ns (mm	1)							'	'	,	'		Mass m
	A <sub>2</sub>	D	$D_1$	$D_2$	$F_7$	F <sub>8</sub>	$H_{2}^{1)}$	$\mathbf{L}_{max}$	$N_6^{\pm 0.5}$	S <sub>5</sub>	Т	T <sub>1 min</sub>	$T_{1S}^{2)}$	T <sub>1 max</sub>	(kg/m)
25	23	11.0	12.55	13.0	0.90	3.7	24.25	5 816	15.2	7.0	60	13	28.0	50	3.2
30	28	15.0	17.55	18.0	0.90	3.6	28.35	5 836	17.0	9.0	80	16	38.0	68	5.0
35	34	15.0	17.55	18.0	0.90	3.6	31.85	5 836	20.5	9.0	80	16	38.0	68	6.8
45	45	20.0	22.55	23.0	1.45	8.0	39.85	5 771	23.5	14.0	105	18	50.5	89	10.5
55	53	24.0	27.55	28.0	1.45	8.0	47.85	3 836	29.0	16.0	120	20	58.0	102	16.2
65	63	26.0	29.55	30.0	1.45	8.0	59.85	3 746	38.5	18.0	150	21	73.0	130	22.4

- Dimension H<sub>2</sub> without cover strip
   Preferred dimension T<sub>1S</sub> with tolerances ± 0.75 recommended.

## SNS for mounting from below



#### R1607 .0. ..

#### For mounting from below

#### Notes

- ▶ Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."
- ► Composite ball guide rail also available.

#### Further ball guide rails SNS and accessories

► Corrosion resistant ball guide rails Resist NR, Resist CR

#### **Options and material numbers**

Size	Ball guide rail with size	Accu	racy o	class			Number of par Rail length L (I		Spacing T (mm)	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4 mm
		N	н	Р	SP	UP	One-piece	Composite		Maximum number of holes n <sub>B</sub>
15	R1607 10	4	3	2	1	9	31,	3.,	60	64
20	R1607 80	4	3	2	1	9	31,	3.,	60	64
25	R1607 20	4	3	2	1	9	31,	3.,	60	64
30	R1607 70	4	3	2	1	9	31,	3.,	80	48
35	R1607 30	4	3	2	1	9	31,	3.,	80	48
45	R1607 40	4	3	2	1	9	31,	3.,	105	36
55	R1607 50	4	3	2	1	9	31,	3.,	120	32
65	R1607 60	4	3	2	1	9	31,	3.,	150	25
Fσ·	R1607 70		3				31 1676	1		ı

### Ordering example 1

### (to L<sub>max</sub>)

Options:

- ► Ball guide rail SNS
- Size 30
- Accuracy class H
- One-piece
- Rail length

L = 1676 mm

Material number:

R1607 703 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)


Options:

- ► Ball guide rail SNS
- Size 30
- ► Accuracy class H
- ▶ 2 partial sections
- ► Rail length

L = 5116 mm

Material number:

R1607 703 32, 5116 mm

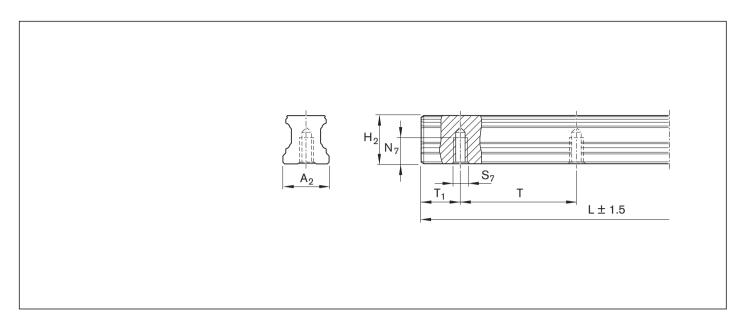

Size	Dimensions (	mm)								Mass m
	A <sub>2</sub>	$H_{2}^{1)}$	$L_{max}$	$N_7$	S <sub>7</sub>	Т	T <sub>1min</sub>	T <sub>1S</sub> <sup>2)</sup>	T <sub>1 max</sub>	(kg/m)
15	15	16.20	3 836	7.5	M5	60	10	28.0	50	1.4
20	20	20.55	5 816	9.0	M6	60	10	28.0	50	2.4
25	23	24.25	5 816	12.0	M6	60	10	28.0	50	3.2
30	28	28.35	5 836	15.0	M8	80	12	38.0	68	5.0
35	34	31.85	5 836	15.0	M8	80	12	38.0	68	6.8
45	45	39.85	5 771	19.0	M12	105	16	50.5	89	10.5
55	53	47.85	3 836	22.0	M14	120	18	58.0	102	16.2
65	63	59.85	3 746	25.0	M16	150	20	73.0	130	22.4

- Dimension H<sub>2</sub> without cover strip
   Preferred dimension T<sub>1S</sub> with tolerances ± 0.75 recommended.

## Product description

#### General notes on ball guide rails Resist NR II

For material numbers, please refer to the following pages. For recommended rail lengths, dimensions and gravity, see corresponding standard steel ball guide rails. Observe the chapter "Instruction for mounting"!

Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".

Accessories: Cover strip, strip clamps, mounting hole plugs, ... for ball guide rails, see chapter "Accessories for ball guide rails"

#### Corrosion resistance and conditions of use

Ball guide rails Resist NR II as well as all steel parts are made of corrosion resistant steel according to DIN EN 10088, strip clamps are made of aluminum. Ball guide rails Resist NR II are used specifically in conjunction with water-based media, heavily diluted acidic materials, alkali or saline solutions. These guideways are also ideally suitable for use at relative humidities above 70 % and temperatures exceeding 30 °C. Such conditions are found mainly in cleaning plants, electroplating and pickling lines, vapor degreasing plants and refrigeration systems. Since no additional corrosion protection is required, ball rail systems Resist NR II are ideally suited for use in clean rooms and general printed circuit board manufacturing. Other possible areas of application include the pharmaceutical and food industries.

Recommended ball runner blocks for Resist NR II ball guide rails, see the "Ball Runner Block Resist NR II" section When using NRII ball guide rails, always use the lower load ratings of the NRII ball runner blocks.

Combinations of different accuracy classes

When combining ball guide rail and ball runner block of different accuracy classes, the tolerances for dimensions H and  $A_3$  change (see "Accuracy classes and their tolerances").

## Ball guide rails Resist NR II

#### R2045 .3. .., SNS can be screwed from above, with cover strip and strip clamps



#### **Options and material numbers**

Size	Ball guide rail with size	Accurac	y class		Number of partial secti Rail length L (mm),	ons .,
		N	H	P	One-piece	Composite
15 <sup>1)</sup>	R2045 13	4	3	2	31,	3.,
20	R2045 83	4	3	2	31,	3.,
25	R2045 23	4	3	2	31,	3.,
30	R2045 73	4	3	2	31,	3.,
35	R2045 33	4	3	2	61,	6.,
E.g.:	R2045 73		3		31, 1676	

1) Maximum rail length 1856 mm, maximum number of holes n<sub>B</sub> 30

#### Instruction for mounting

- ► Secure the cover strip!
- Strip clamps included in scope of delivery.
- Composite ball guide rail also available.

#### Ordering example 1

(to L<sub>max</sub>)

Options:

► Ball guide rail NR II, SNS

- ► Size 30
- ► Accuracy class H
- ▶ One-piece
- ► Rail length

L = 1676 mm

Material number:

R2045 733 31, 1676 mm

#### Ordering example 2

(above L<sub>max</sub>)

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ► Accuracy class H
- ▶ 2 partial sections
- ▶ Rail length

L = 5116 mm

Material number:

R2045 733 3**2**, 5116 mm

## Ball guide rails Resist NR II

#### R2045 .0. .., SNS can be screwed from above, with plastic mounting hole plugs



#### **Options and material numbers**

Size	Ball guide rail with size	1 '			Number of partial secti Rail length L (mm),	ons .,
		N	Н	P	One-piece	Composite
15 <sup>1)</sup>	R2045 10	4	3	2	31,	3.,
20	R2045 80	4	3	2	31,	3.,
25	R2045 20	4	3	2	31,	3.,
30	R2045 70	4	3	2	31,	3.,
35	R2045 30	4	3	2	31,	3.,
E.g.:	R2045 70		3		31, 1676	

1) Maximum rail length 1856 mm, maximum number of holes n<sub>B</sub> 30

#### Instruction for mounting

- ► Plastic mounting hole plugs included in scope of supply.
- Composite ball guide rail also available.

#### Ordering example 1

#### (to $L_{max}$ )

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ► Accuracy class H
- ▶ One-piece
- ► Rail length

L = 1676 mm

Material number:

R2045 703 31, 1676 mm

#### Ordering example 2

#### (above L<sub>max</sub>)

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- Accuracy class H
- ▶ 2 partial sections
- ► Rail length

L = 5116 mm

Material number:

R2045 703 32, 5116 mm

#### R2047 .0. .., SNS, for mounting from below



#### **Options and material numbers**

Size	Ball guide rail	Accurac	y class		Number of partial secti	ons .,
	with size				Rail length L (mm),	
		N	Н	P	One-piece	Composite
15 <sup>1)</sup>	R2047 10	4	3	2	31,	3.,
20	R2047 80	4	3	2	31,	3.,
25	R2047 20	4	3	2	31,	3.,
30	R2047 70	4	3	2	31,	3.,
35	R2047 30	4	3	2	31,	3.,
E.g.:	R2047 70		3			32, 5116

1) Maximum rail length 1856 mm, maximum number of holes n<sub>B</sub> 30

#### Instruction for mounting

► Composite ball guide rail also available.

#### Ordering example 1

#### (to $L_{max}$ )

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ► Accuracy class H
- ▶ One-piece
- ► Rail length

 $L = 1676 \, \text{mm}$ 

Material number:

R2047 703 31, 1676 mm

#### Ordering example 2

#### (above L<sub>max</sub>)

Options:

- ▶ Ball guide rail NR II, SNS
- ▶ Size 30
- ► Accuracy class H
- ▶ 2 partial sections
- ► Rail length

L = 5116 mm

Material number:

R2047 703 32, 5116 mm

### Product description

#### General notes on ball guide rails Resist CR

For material numbers, please refer to the following pages. For recommended rail lengths, dimensions and gravity, see corresponding standard steel ball guide rails. Observe the chapter "Instruction for mounting"!

Please request the "Mounting instructions for ball rail systems" and "Mounting instructions for cover strip".

Accessories: Cover strip, strip clamps, mounting hole plugs, ... for ball guide rails, see chapter "Accessories for ball guide rails"

#### **Corrosion resistant Resist CR coating**

Steel ball guide rail with corrosion resistant coating, matte-silver finish, hard chrome plated.

#### Ball guide rails with coated end faces

- ► Coated end faces, chamfers and end-face thread, material numbers: R16.. ... 41 or R16.. ... 71
- ▶ Multi-part ball guide rails are chamfered on two sides at the joints.

#### Recommended ball runner blocks for Resist CR ball guide rails of accuracy class H and preload class C0 and C1

Sizes 15 - 65: Accuracy class H, preload class C0

Sizes 30 - 65: Accuracy class H, preload class C1

#### Combinations of different accuracy classes

Combining ball guide rails and ball runner blocks of different accuracy classes results in different tolerances for the dimensions H and A3 (see chapter "Accuracy classes and their tolerances").

### Ball guide rails Resist CR

#### R1645 .3. .., SNS can be screwed from above, with cover strip and strip clamps



#### **Options and material numbers**

Size	Ball guide rail with size	Accuracy class	Number of partial sections ., Rail length L (mm), One-piece	Composite
		н	Coated end faces	Coated end faces
15	R1645 13	3	41,	4.,
20	R1645 83	3	41,	4.,
25	R1645 23	3	41,	4.,
30	R1645 73	3	41,	4.,
35	R1645 33	3	71,	7.,
45	R1645 43	3	71,	7.,
55	R1645 53	3	71,	7.,
65	R1645 63	3	71,	7.,
E.g.:	R1645 73	3	41, 1676	

#### **Instruction for mounting**

- ► Secure the cover strip!
- ► Strip clamps included in scope of delivery.
- ► Composite ball guide rail also available.

#### Ordering example 1

#### (to $L_{max}$ )

Options:

- ► Ball guide rail CR, SNS
- ▶ Size 30
- Accuracy class H
- One-piece
- ▶ End faces coated
- Rail length

L = 1676 mm

Material number:

R1645 733 41, 1676 mm

#### Ordering example 2

#### (above $L_{max}$ )

Options:

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ► Accuracy class H
- ► 2 partial sections
- ► End faces coated
- ▶ Rail length

L = 5116 mm

Material number:

R1645 733 42, 5116 mm

## Ball guide rails Resist CR

R1645 .0. .., SNS can be screwed from above, with plastic mounting hole plugs



#### **Options and material numbers**

Size	Ball guide rail with size	Accuracy class	Number of partial sections ., Rail length L (mm),								
			One-piece	Composite							
		н	Coated end faces	Coated end faces							
15	R1645 10	3	41,	4.,							
20	R1645 80	3	41,	4.,							
25	R1645 20	3	41,	4.,							
30	R1645 70	3	41,	4.,							
35	R1645 30	3	41,	4.,							
45	R1645 40	3	41,	4.,							
55	R1645 50	3	41,	4.,							
65	R1645 60	3	41,	4.,							

3

#### **Instruction for mounting**

- ▶ Plastic mounting hole plugs included in scope of supply.
- ► Composite ball guide rail also available.

#### Ordering example 1 (to $L_{max}$ )

#### Options:

**E.g.:** R1645 70

- ▶ Ball guide rail CR, SNS
- Size 30
- ► Accuracy class H
- ▶ One-piece
- ► End faces coated
- ► Rail length L = 1676 mm

Material number:

R1645 703 41, 1676 mm

#### Ordering example 2 (above $L_{max}$ )

#### Options:

- ▶ Ball guide rail CR, SNS
- Size 30
- Accuracy class H

41, 1676

- 2 partial sections
- End faces coated
- ► Rail length L = 5116 mm

Material number:

R1645 703 42, 5116 mm

#### R1647 .0. .., SNS for mounting from below



#### **Options and material numbers**

Size	Ball guide rail with size	Accuracy class	Number of partial sections ., Rail length L (mm),							
			One-piece	Composite						
		н	Coated end faces	Coated end faces						
15	R1647 10	3	41,	4.,						
20	R1647 80	3	41,	4.,						
25	R1647 20	3	41,	4.,						
30	R1647 70	3	41,	4.,						
35	R1647 30	3	41,	4.,						
45	R1647 40	3	41,	4.,						
55	R1647 50	3	41,	4.,						
65	R1647 60	3	41,	4.,						
E.g.:	R1647 70	3		42, 5116						

#### Instruction for mounting

 Composite ball guide rail also available.

#### Ordering example 1 (to $L_{max}$ )

- ▶ Ball guide rail CR, SNS
- ▶ Size 30
- ► Accuracy class H
- ▶ One-piece
- ► End faces coated
- ► Rail length L = 1676 mm

Material number:

R1647 703 41, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

Options:

- ▶ Ball guide rail CR, SNS
- Size 30
- Accuracy class H
- ▶ 2 partial sections
- ► End faces coated
- ► Rail length L = 5116 mm

Material number:


R1647 703 42, 5116 mm


# Ball guide rails with temperature control Product description

#### Characteristic features

#### Faster starting, more precise movement, simple conversion


What used to only be possible with a lot of effort and special solutions is now available for the first time as standard: Rexroth has integrated temperature control into the Guide Rail. Wherever fast travel cycles and the highest precision are required, Guide Rails can now be started without any run-in time. Always at the perfect temperature and thermally stable. And with less waste. Ideal for retrofitting: simply replace the rail and connect to the existing cooling circuit. You can turn your standard machines into precision machines in no time at all!

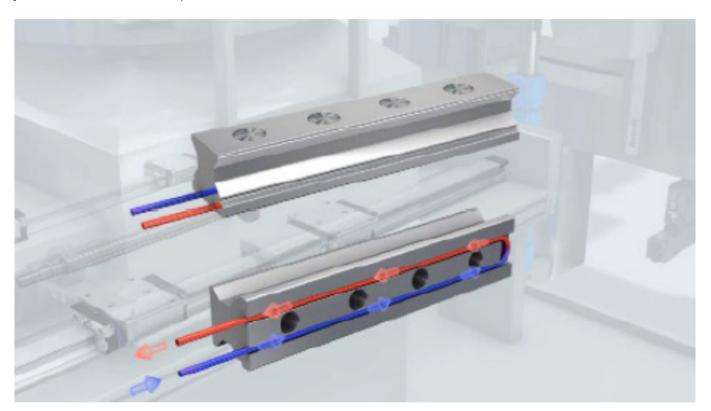

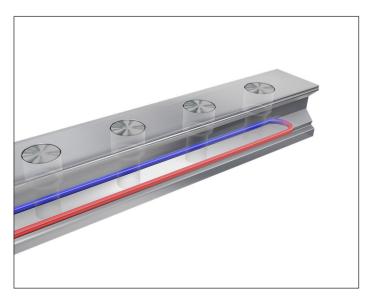


#### Extremely precise movement, flexible adjustment

Since the new Guide Rails by Rexroth remove the heat from where it is created or supplies it to where it is needed you have complete freedom. No matter where your machine is positioned or what material the machine bed is made from, the linear guide rails work with high precision and are thermally stable. No run-in time, with good parts right from the first part onwards. This ensures the greatest availability and increases part accuracy by up to 75%. Even with existing machines: rails can be easily connected to existing cooling circuits with ready to connect piping. Finished.

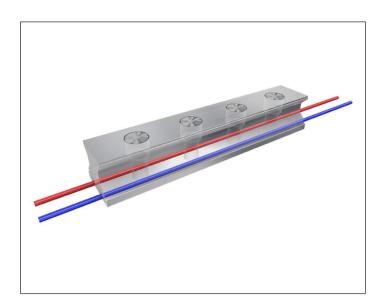

#### **Further highlights**

- ▶ High precision: up to 75% higher part accuracy, regardless of environment
- ► Always available: no run-in to the operating temperature
- ► Flexible: can be adjusted to changes as required
- ► Can be retrofitted: compatible with existing systems
- ► Simple: pipes are ready to connect, uses existing cooling circuits

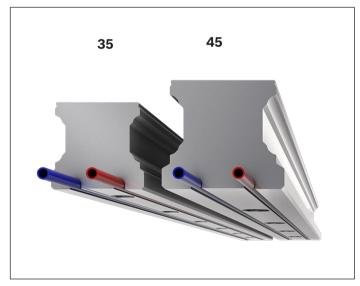

#### **Technical features**

▶ Ball guide sizes: 35/45

► Formats: R1605

► Rail covers: Cover strip, plastic caps

Series with groove ► Accuracy classes: P/SP

▶ Rail lengths: up to max. 4000 mm

► Redirecting temperature control: to the rails or universal

▶ Patent pending

## Product description

#### Characteristic features

- ► Limitless interchangeability as all
  - ball guide rail systems can be combined at will with all ball runner block versions within each accuracy class.
- Very high torsional moment load capacity and very high torsion resistance therefore primarily used as an individual guide
- High torque load capacity
- ► The same high load ratings in all four main directions of loading
- ► Integrated all-round sealing
- ▶ Low noise level and optimum travel behavior
- ► Excellent dynamic characteristics:

Travel speed:  $v_{max}$  up to 5 m/s <sup>1)</sup>

Acceleration:  $a_{max}$  up to 500 m/s<sup>2 1)</sup>

- ▶ Long-term lubrication is possible over several years
- Minimum quantity lubrication system with integrated reservoir for oil lubrication<sup>1)</sup>
- ▶ Lube fittings with metal threads on all sides¹)
- ► Maximum system rigidity due to preloaded O-arrangement
- ▶ Wide range of accessories

#### **Further highlights**

- Optimized entry-zone geometry and high number of balls minimize variation in elastic deflection
- ▶ End-face fastening thread for all attachments
- ▶ Linear guideway with low clearance or moderate preload
- Quiet, smooth running thanks to optimally designed ball and ball chain return and guideway<sup>1)</sup>
- Attachments on the ball runner block can be mounted from above and below<sup>1)</sup>
- Improved rigidity under lift-off and side loading conditions due to two additional mounting screw holes at the center of the ball runner block
- ▶ Ball runner block pre-lubricated at the factory¹)
- Optionally available with ball chain<sup>1)</sup>
- Can be used on all BNS ball guide rails.

#### **Corrosion protection (optional)**

Resist CR:

Ball runner block body or ball guide rail made of steel with corrosion resistant coating, matte-silver finish, hard chrome plated

#### 1) Type-dependent

#### A Size 20/40:

New ball rail system with different ball diameters. Not interchangeable with the old 20/40 size!

#### **Overview of formats**



BNS

Sizes 35/90

Sizes 20/40 and 25/70

- ▶ With ball chain
- Pre-lubricated



#### Sizes 20/40 and 25/70

- ▶ With ball chain
- Pre-lubricated

#### **Definition of the format of ball runner blocks**

Designation	Code (	example)		
	В	N	S	
Flange (F)	F			
Slimline (S)	S			
Wide (B)	В			
Compact (C)	С			
Normal (N)		N	,	
Long (L)		L		
Short (K)		K		
Standard height (S)			S	
High (H)			Н	
Low (N)			N	
	Flange (F) Slimline (S) Wide (B) Compact (C) Normal (N) Long (L) Short (K) Standard height (S) High (H)	Flange (F) F Slimline (S) S Wide (B) B Compact (C) C Normal (N) Long (L) Short (K) Standard height (S) High (H)	B   N	B N S   Flange (F)   F   Slimline (S)   S   Wide (B)   B   Compact (C)   C   Normal (N)   N   Long (L)   L   Short (K)   K   Standard height (S)   S   High (H)   H



#### Ball chain (optional)

▶ Optimized noise level

## BNS - wide, normal, standard height



### Ball runner block made of steel

#### R1671 ... 2.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr}$ :  $a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

Pre-lubricated

#### Further ball runner blocks BNS

► Corrosion resistant ball runner blocks see below

#### Order example

#### Options:

- ▶ Ball runner blocks BNS
- ▶ Sizes 25/70
- ▶ Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1671 213 20

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload	class	Accurac	y class		Seals on without chain		with ball	
		C0	C1	N	H	P	SS	DS	SS	DS
20/40 <sup>1)</sup>	R1671 5	9		4	3	_	20	_	22	_
			1	4	3	2	20	2Z	22	2Y
25/70	R1671 2	9		4	3	_	20	_	22	_
			1	4	3	2	20	2Z	22	2Y
E.g.:	R1671 2		1		3		20			

## Ball runner block, Resist CR R1671 ... 7.

#### Note on lubrication:

► Pre-lubricated

#### Order example

#### Options:

- ► Ball runner blocks BNS
- ▶ Sizes 25/70
- ▶ Preload class C0
- ► Accuracy class H
- With standard seal, without ball chain

Material number: R1671 293 70

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload class	Accuracy class		Seals on ball runner blocks without ball with ball chain					
		CO	н	SS	DS	SS	DS			
20/40 <sup>1)</sup>	R1671 5	9	3	70	7Z	72	7Y			
25/70	R1671 2	9	3	70	7Z	72	7Y			
E.g.:	R1671 2	9	3	70						

1) Caution: Ball runner blocks, not combinable with ball guide rail R167.8...!

#### Preload classes

C0 = Without preload (clearance) C1 = Moderate preload

#### Seals


SS = Standard seal DS = Double-lip seal

#### Key

gray numbers

No preferred variant /
combination

(partially longer delivery times)

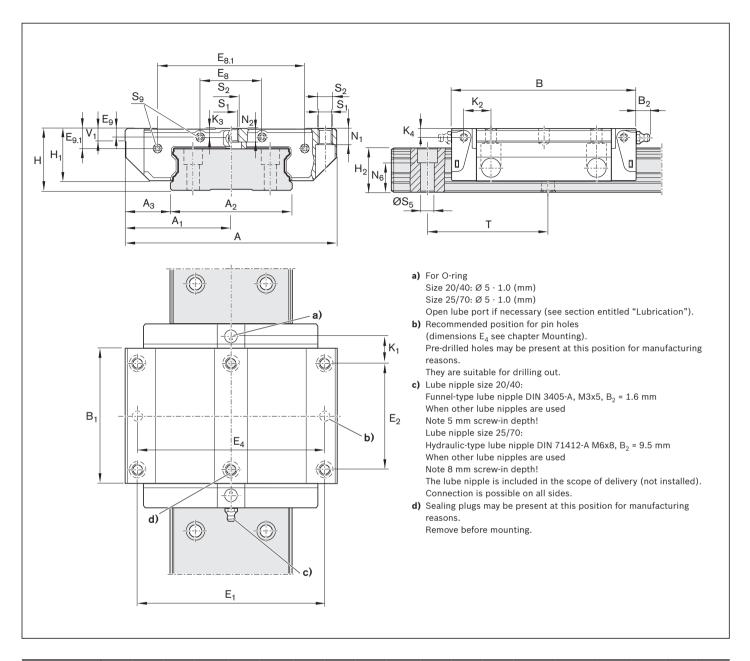


Size	Dimens	imensions (mm)																	
	Α	$A_1$	$A_2$	$A_3$	В	$B_1$	$E_1$	$E_2$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	Н	H <sub>1</sub>	H <sub>2</sub>	$K_1$	$K_2$	$K_3$	$K_4$
20/40	80	40	42	19.0	73	51.3	70	40	18	53.4	3.4	8.1	27	22.50	18.30	10.6	11.0	3.5	3.5
25/70	120	60	69	25.5	105	76.5	107	60	35	83.5	4.9	11.3	35	29.75	23.55	15.4	15.5	5.2	5.2

Size	Dimer	nsions	(mm)								Load capa	cities <sup>1)</sup>	Load m	Load moments <sup>1)</sup> (Nm)			
										(kg)	(N)				1		
											<b>1</b>	<u>†</u>		- -		-Te- oth	
											<b>→</b> └ <u></u> _	,□ <b>←</b>	4				
	N <sub>1</sub>	$N_2$	$N_6^{\pm0.5}$	$\mathbf{S_1}$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>		С	$C_0$	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	$M_{L0}$	
20/40	7.70	3.70	12.5	5.3	M6	4.4	M2.5x1.5 <sup>+3</sup>	60	6.0	0.4	14900	20600	340	470	140	190	
25/70	9.35	7.05	14.4	6.7	M8	7.0	M3x2 <sup>+4.5</sup>	80	7.5	1.2	36200	50200	1 350	1870	490	680	

<sup>1)</sup> Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🕶 🖹 14

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C, M, and M, by 1.26 according to the table.

## BNS - wide, normal, standard height

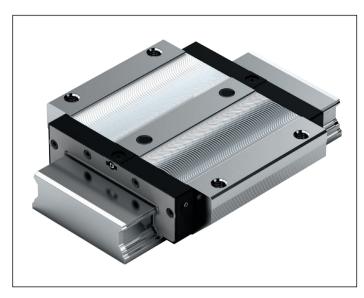

#### Ball runner block made of steel R1671 ... 1.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 3 \text{ m/s}$ Acceleration:  $a_{max} = 250 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

▶ No initial lubrication

#### **Further ball runner blocks BNS**

► Corrosion-resistant ball runner blocks see below

#### Order example

#### Options:

- ► Ball runner blocks BNS
- ▶ Sizes 35/90
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1671 313 10

#### **Options and material numbers**

Size	Ball runner blocks with size	Preloa	d class		Accurac	y class		Seals on ball runner blocks without ball chain		
		C0	C1	C2	N	Н	P	SS		
35/90	R1671 3	9			4	3	_	10		
			1		4	3	2	10		
				2	ĺ	3	2	10		
E.g.:	R16713		1			3		10		

#### Ball runner block, Resist CR R1671 ... 6.

#### Order example

#### Options:

- ▶ Ball runner blocks BNS
- Sizes 35/90
- ▶ Preload class C1
- ► Accuracy class H
- With standard seal, without ball chain

Material number:

R1671 313 60

#### **Options and material numbers**

Size	Ball runner blocks with size		class	Accuracy class  Seals on ball runner b without ball chain			
		CO	C1	н			
35/90	R1671 3	9	1	3		60	
E.g.:	R1671 3		1	3		60	


**Preload classes** 

C0 = Without preload (clearance)

C1 = Moderate preload

Seals

SS = Standard seal

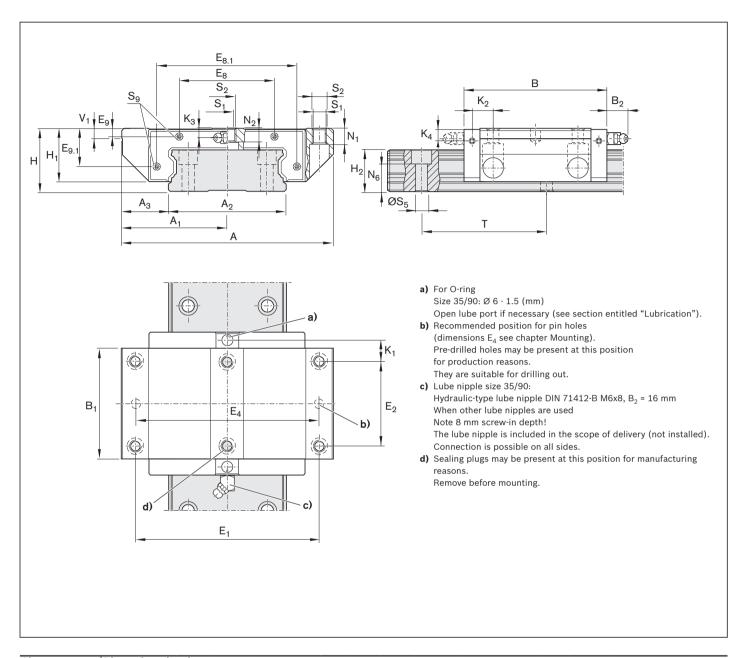

Size	Dimension	ons (mm	1)														
	Α	$A_1$	$A_2$	$A_3$	В	$B_1$	$E_1$	$E_2$	E <sub>8</sub>	E <sub>8.1</sub>	$E_9$	E <sub>9.1</sub>	Н	H <sub>1</sub>	$H_2$	$K_1$	$K_2$
35/90	162	81	90	36	142	113.6	144	80	79	116	6.8	29.9	50	42.5	31.85	22.8	24.8

Size	Dimen	sions	(mm	)								Mass (kg)	Load cap	acities <sup>1)</sup>	Load mo	oments	<sup>1)</sup> (Nm)	
												( 0)	→ <u>↓</u>	<u>†</u>				
	K <sub>3</sub>	$K_4$	$N_1$	$N_2$	$N_6^{\pm0.5}$	$S_1$	$S_2$	S <sub>5</sub>	S <sub>9</sub>	Т	$V_1$		С	Co	M <sub>t</sub>	$M_{t0}$	M <sub>L</sub>	$M_{L0}$
35/90	9	9	14	12	20.5	8.4	M10	9	М3х5	80	8.0	3.70	70700	126000	3500	6240	1470	2620

1) Load ratings and load moments for ball runner block without ball chain. Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values C,  $M_t$  and  $M_L$  by 1.26 according to the table.

## CNS - compact, normal, standard height



#### Ball runner block made of steel R1672 ... 2.

#### **Dynamic characteristics**

Travel speed:  $v_{max} = 5 \text{ m/s}$ Acceleration:  $a_{max} = 500 \text{ m/s}^2$ (If  $F_{comb} > 2.8 \cdot F_{pr} : a_{max} = 50 \text{ m/s}^2$ )

#### Note on lubrication:

Pre-lubricated

#### **Further ball runner blocks CNS**

► Corrosion-resistant ball runner blocks see below

#### Order example

#### Options:

- ▶ Ball runner blocks CNS
- Sizes 25/70
- Preload class C1
- Accuracy class H
- With standard seal, without ball chain

Material number:

R1672 213 20

#### **Options and material numbers**

Size	Ball runner blocks with size	Preload	class	Accurac	y class		Seals on without chain		with bal	
		C0	C1	N	Н	Р	SS	DS	SS	DS
20/40 <sup>1)</sup>	R1672 5	9		4	3	_	20	_	22	_
			1	4	3	_	20	2Z	22	2Y
25/70	R1672 2	9		4	3	-	20	_	22	-
			1	4	3	_	20	2Z	22	2Y
E.g.:	R1672 2		1		3		20			

#### **Ball runner block** Resist CR2) R1672 ... 7.

#### Order example

Options:

- Ball runner blocks CNS
- Sizes 25/70
- Preload class C0
- Accuracy class H
- With standard seal, without ball chain

Material number: R1672 293 70

#### **Options and material numbers**

Size	Ball runner blocks with	Preload class	Accuracy class		Seals on ba	ll runi	ner blocks	
	size				without bal	I	with ball c	hain
		CO		Н	SS	DS	SS	DS
20/401)	R1672 5	9		3	70	7Z	72	7Y
25/70	R1672 2	9		3	70	7Z	72	7Y
E.g.:	R1672 2	9		3	70			

1) Caution: Ball runner blocks, not combinable with ball guide rail R167.8...!

Preload classes


C0 = Without preload (clearance) C1 = Moderate preload

Seals

SS = Standard seal DS = Double-lip seal Key

gray numbers = No preferred variant /

combination (partially longer delivery times)

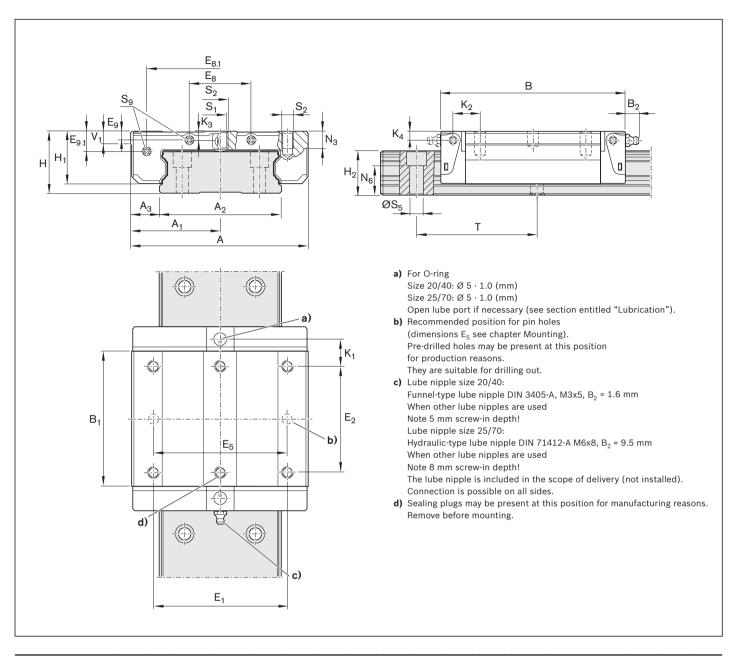

Size	Dimens	sions (	mm)																
	Α	$A_1$	$A_2$	$A_3$	В	$\mathbf{B_1}$	E <sub>1</sub>	$E_2$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	Н	H <sub>1</sub>	H <sub>2</sub>	$K_1$	$K_2$	$K_3$	$K_4$
20/40	62	31	42	10.0	73.0	51.3	46	32	18	53.4	3.4	8.1	27	22.50	18.30	14.6 15.	.00	3.5	3.5
25/70	100	50	69	15.5	104.7	76.5	76	50	35	83.5	4.9	11.3	35	29.75	23.55	19.4 20.	45	5.2	5.2

Size	Dime	nsions (r	nm)						Mass	Load capa	cities1)	Load mon	nents <sup>1)</sup>	(Nm)	
									(kg)	(N)					
										1.	t		_		
										<b>→</b> □	<b>;</b> □←				
	N <sub>3</sub>	$N_6^{\pm0.5}$	$S_1$	$S_2$	$S_5$	S <sub>9</sub>	Т	V <sub>1</sub>		С	$C_0$	$M_t$	$M_{t0}$	$M_L$	M <sub>LO</sub>
20/40	6	12.5	5.3	M6	4.4	M2.5x1.5 <sup>+3</sup>	60	6.0	0.3	14900	20600	340	470	140	190
25/70	8	14.4	6.7	M8	7.0	M3x2 <sup>+4.5</sup>	80	7.5	1.0	36200	50200	1 350	1870	490	680

<sup>1)</sup> Load ratings and load moments for ball runner block without ball chain. Load ratings and load moments for ball runner block with ball chain 🗈 14

Determination of the dynamic load capacities and load moments is based on a stroke travel of 100,000 m according to DIN ISO 14728-1. Often only 50,000 m are actually stipulated. For comparison: Multiply the values  $\mathbf{C}$ ,  $\mathbf{M}_1$  and  $\mathbf{M}_1$  by 1.26 according to the table.

## Product description

#### **Characteristic features**

- Maximum rigidity in all load directions
- Maximum torque load capacity

#### **Corrosion protection (optional)**

► Resist CR:

Ball guide rail made of steel with corrosion resistant coating, matte-silver finish, hard chrome plated, accuracy class H




ball rail system with other ball diameters. Not interchangeable with the old 20/40 size!



Ball guide rails with plastic mounting hole plugs



Ball guide rails with steel mounting hole plugs

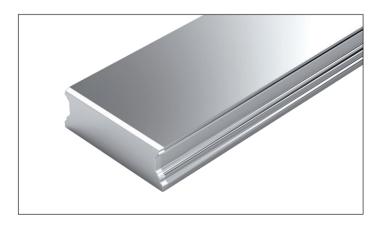

Ball guide rails for mounting from below

#### Definition of the format of ball guide rails

Criterion	Designation	Code	(example)		
		В	N	S	
Width	Slimline (S)	S			
	Wide (B)	В			
Length	Normal (N)		N		
Height	Standard height (S)			S	

(mm)

## Ordering guide rails in the recommended rail lengths

## Ordering ball guide rails in the recommended rail lengths

The procedure shown in the following ordering examples applies to all ball guide rails. Recommended rail lengths are more cost effective.

## From the desired rail length to the recommended length

$$L = \left(\frac{L_W}{T}\right)^* \cdot T - 4$$


\* Round up quotient L<sub>W</sub>/T to the nearest whole number!

#### Calculation example


$$L = \left(\frac{1660 \text{ mm}}{80 \text{ mm}}\right) \cdot 80 \text{ mm} - 4 \text{ mm}$$

 $L = 21 \cdot 80 \text{ mm} - 4 \text{ mm}$ 

 $L = 1676 \, \text{mm}$ 



Excerpt from table with part numbers and recommended rail lengths for ordering example

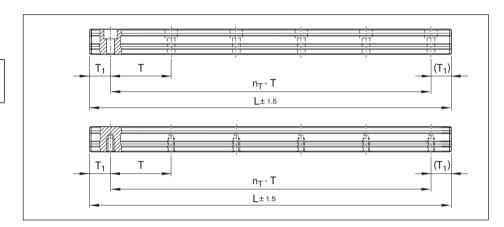

Basis: Number of holes per drill row

$$L = n_B \cdot T - 4$$

Basis: Number of spaces

$$L = n_{T} \cdot T + 2 \cdot T_{1S}$$

L = Recommended rail length (mm)

-w = Desired rail length

T = Pitch (mm)

 $T_{1S}$  = Preferred dimension (mm)

 $n_B = Number of holes per drill row (-)$ 

 $n_{\tau}$  = Number of spaces (-)

#### Notes on ordering examples

If preferred dimension  $T_{\rm 1S}$  is not used, it is possible to choose between:

- Select end spacing T<sub>1</sub> between T<sub>1S</sub> and T<sub>1 min</sub>
- As an alternative, it is possible to choose end spacings T<sub>1</sub> to T<sub>1 max</sub>

#### Ordering example 1 (to $L_{max}$ )

- ► Ball guide rail BNS size 35/90 with plastic mounting hole plugs
- ► Accuracy class H
- Calculated rail length 1676 mm, (20 · T, preferred dimension T<sub>1S</sub> = 38 mm; Number of holes per drill row n<sub>B</sub> = 21)

#### **Ordering data**

Part number; rail length (mm)  $T_1 / n_T \cdot T / T_1$  (mm)

**R1675 303 31, 1676** mm **38 / 20 · 80 / 38** mm

#### Ordering example 2 (above L<sub>max</sub>)

- ► Ball guide rail BNS size 35/90 with plastic mounting hole plugs
- Accuracy class H
- Calculated rail length 5116 mm, 2 sections (63 · T, preferred dimension T<sub>1S</sub> = 38 mm; Number of holes per drill row n<sub>B</sub> = 64)

#### **Ordering data**

Material number with number of partial sections, rail length (mm)  $T_1 / n_T \cdot T / T_1$  (mm)

R1675 303 32, 5116 mm 38 / 63 · 80 / 38 mm

In the case of rail lengths above  $L_{\text{max}}$ , factory-coordinated partial sections are joined together.

## BNS with plastic mounting hole plugs



Ball guide rails made of steel R1675 .0. ..

With two-row hole pattern, for mounting from above with plastic mounting hole plugs

#### Notes

- ▶ Plastic mounting hole plugs included in scope of supply.
- Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."
- ► Composite ball guide rail also available.

#### Further ball guide rails BNS and accessories

- ► Corrosion resistant ball guide rails see below
- ▶ Mounting hole plugs see chapter "Accessories for ball guide rails"

#### **Options and material numbers**

Size	Ball guide rail with size	Accu	-		Number of partial sections ., Rail length L (mm), One-piece	Composite		Recommended rail length in accordance with formula  L = n <sub>B</sub> · T - 4  Maximum number of holes per
		N	Н	Р				drill row n <sub>B</sub>
20/401)	R1675 50	4	3	2	31,	3.,	60	64
25/70	R1675 20	4	3	2	31,	3.,	80	48
35/90	R1675 30	4	3	2	31,	3.,	80	48
E.g.:	R1675 30		3		31, 1676			

#### Ball guide rails Resist CR R1673 .0. ..

#### **Options and material numbers**

Size	Ball guide rail with size	Accuracy class	Number of partia Rail length L (mm	•		Hole spacing T	Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4
		н	One-piece Uncoated end faces	Coated end faces	Composite Coated end faces	,	Maximum number of holes per drill row n <sub>B</sub>
20/40 <sup>1)</sup>	R1673 50	3	31,	41,	4.,	60	64
25/70	R1673 20	3	31,	41,	4.,	80	48
35/90	R1673 30	3	31,	41,	4.,	80	48
E.g.:	R1673 30	3			42, 5116		

<sup>1)</sup> Caution: Ball guide rail cannot be combined with ball runner block R1671 8....!

#### Ordering example 1 (to $L_{max}$ ) **Options:**

- ► Ball guide rail BNS
- ▶ Sizes 35/90
- ► Accuracy class H
- ▶ One-piece
- ► End faces uncoated
- ► Rail length L = 1676 mm


Material number: R1675 303 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

#### Options:

- ► Ball guide rail CR, BNS
- ▶ Sizes 35/90
- ► Accuracy class H
- ▶ 2 partial sections
- ► End faces coated
- ► Rail length L = 5116 mm

Material number: R1673 303 42, 5116 mm

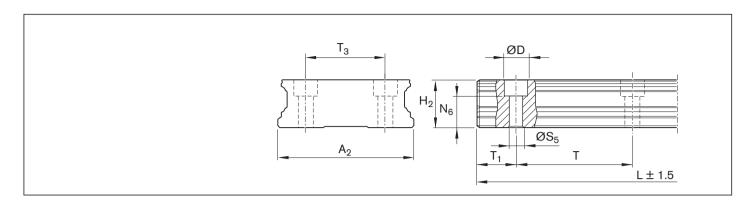

Size	Dimensions	(mm)			'				,			Mass
	A <sub>2</sub>	D	H <sub>2</sub> <sup>1)</sup>	$L_{max}$	$N_6^{\pm 0.5}$	S <sub>5</sub>	Т	T <sub>1 min</sub>	$T_{1S}^{2)}$	T <sub>1 max</sub>	T <sub>3</sub>	(kg/m)
20/40	42	7.4	18.30	3 836	12.45	4.4	60	10	28	50	24	5.3
25/70	69	11.0	23.55	3 836	14.50	7.0	80	10	38	70	40	11.6
35/90	90	15.0	31.85	3 836	20.50	9.0	80	12	38	68	60	21.0

- Dimension H<sub>2</sub> without cover strip
   Recommended: preferred dimension T<sub>1S</sub> with tolerances ± 0.75.

## BNS with mounting hole plugs made of steel



Ball guide rails made of steel R1676 .5. .. With two-row hole pattern, for mounting from above with mounting hole plugs made of steel

#### Notes

- Mounting hole plugs made of steel not included in scope of delivery.
- ► Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."
- ► Composite ball guide rail also available.

#### Accessories

► Mounting hole plugs, mounting tool for mounting hole plugs see chapter "Accessories for ball guide rails"

#### **Options and material numbers**

Size	Ball guide rail with size	Accur	acy cla	SS	Number of part Rail length L (n	,		Recommended rail length in accordance with formula $L = n_B \cdot T - 4$
		N	Н	P	One-piece	Composite	,	Maximum number of holes per drill row n <sub>B</sub>
25/70	R1676 25	4	3	2	31,	3.,	80	48
35/90	R1676 35	4	3	2	31,	3.,	80	48
F.g.:	R1676.35		3		31 1676			

## Ordering example 1 (to $L_{max}$ ) Options:

- ► Ball guide rail BNS
- ▶ Sizes 35/90
- ► Accuracy class H
- ▶ One-piece
- ► Rail length L = 1676 mm


Material number: R1676 353 31, 1676 mm

#### Ordering example 2 (above L<sub>max</sub>)

#### Options:

- ► Ball guide rail BNS
- ▶ Sizes 35/90
- ► Accuracy class H
- ▶ 2 partial sections
- ► Rail length L = 5116 mm


Material number: R1676 353 32, 5116 mm

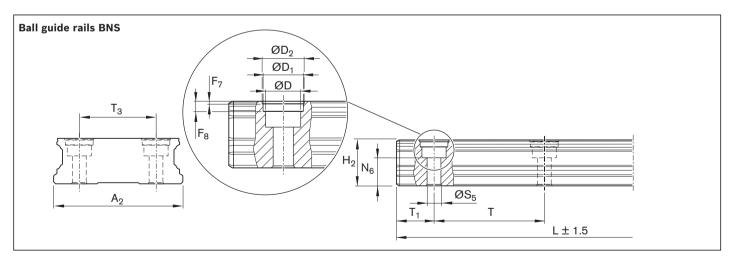

Size	Dimensi	ons (m	m)													Mass
	A <sub>2</sub>	D	$D_1$	$D_2$	$F_7$	F <sub>8</sub>	$H_{2}^{1)}$	$L_{max}$	$N_6^{\pm0.5}$	S <sub>5</sub>	Т	T <sub>1 min</sub>	$T_{1S}^{2)}$	T <sub>1 max</sub>	$T_3$	(kg/m)
25/70	69	11.0	12.55	13	0.9	3.7	23.55	3 836	14.5	7.0	80	10	38	70	40	11.6
35/90	90	15.0	17.55	18	0.9	3.6	31.85	3 836	20.5	9.0	80	12	38	68	60	21.0

- 1) Dimension H<sub>2</sub> without cover strip
- 2) Recommended: preferred dimension  $T_{1S}$  with tolerances  $\pm$  0.75.

## BNS for mounting from below

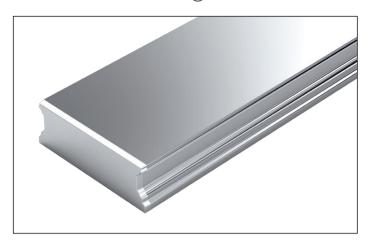

#### Ball guide rails made of steel R1677 .0. .. With double-row mounting hole for mounting from below

#### **Notes**

- ▶ Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."
- ► Composite ball guide rail also available.

#### **Options and material numbers**

Size	Ball guide rail with size	Accuracy class			Number of p			Recommended rail length in accordance with formula L = n <sub>B</sub> · T - 4			
		N	н	P	One-piece	Composite		Maximum number of holes per drill row n <sub>B</sub>			
20/401)	R1677 50	4	3	2	31,	3.,	60	64			
25/70	R1677 20	4	3	2	31,	3.,	80	48			
35/90	R1677 30	4	3	2	31,	3.,	80	48			
E.g.:	R1677 30		3		31, 1676						

<sup>1)</sup> Caution: Ball guide rail cannot be combined with ball runner block R1671 8.. ..!

#### Ordering example 1 (to $L_{max}$ ) **Options:**

- ► Ball guide rail BNS,
- Size 35/90,
- ► Accuracy class H,
- One-piece
- Rail length L = 1676 mm


Material number: R1677 303 31, 1676 mm

#### Ordering example 2 (above $L_{max}$ )

#### Options:

- ► Ball guide rail BNS,
- ▶ Size 35/90,
- Accuracy class H,
- ▶ 2 partial sections
- ► Rail length L = 5116 mm

Material number: R1677 303 32, 5116 mm

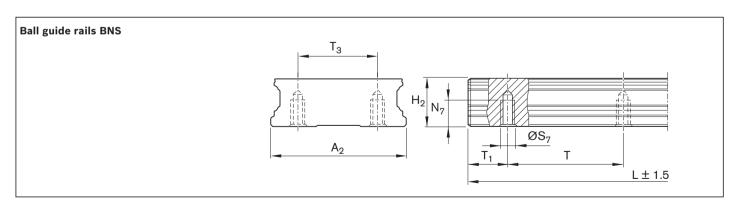

Size	Dimensions (mm)											
	A <sub>2</sub>	$H_{2}^{1)}$	$L_{max}$	$N_7$	S <sub>7</sub>	T	T <sub>1 min</sub>	T <sub>1S</sub> <sup>2)</sup>	T <sub>1 max</sub>	T <sub>3</sub>	(kg/m)	
20/40	42	18.30	3 836	7.5	M5	60	10	28	50	24	5.3	
25/70	69	23.55	3 836	12.0	M6	80	10	38	70	40	11.6	
35/90	90	31.85	3 836	15.0	M8	80	12	38	68	60	21.0	


- 1) Dimension H<sub>2</sub> without cover strip
- **2)** Recommended: preferred dimension  $T_{1S}$  with tolerances  $\pm$  0.75.

## Product description

Rexroth offers limitless interchangeability as all ball runner block versions can be combined at will with all accessories within each size. The entire range is ideally geared to enable a top performance and meet all special requirements. Accessories can also be supplied ready-mounted on request.

#### Overview of ball runner block accessories































1) For ball runner blocks F.N (flange ... low) and S.N. (slimline ... low) not available

## Cover plate wiper

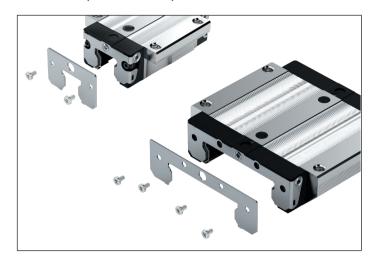


#### Cover plate wiper R16.0 .10 ..

- ▶ Material: Corrosion resistant steel as per DIN EN 10088
- ▶ Design: bright
- Precision design with a maximum gap dimension of 0.1 and 0.3 mm

#### **Instruction for mounting**


- ► When combining with two-piece front seals, use seal kit: See seal kit for part numbers
- ▶ The fastening screws are included.
- ▶ When mounting, make sure that there is a uniform gap between the ball guide rail and the cover plate wiper.
- ▶ Observe the minimum screw-in depth for the end-face lube connection.
- ▶ Observe the mounting instructions.

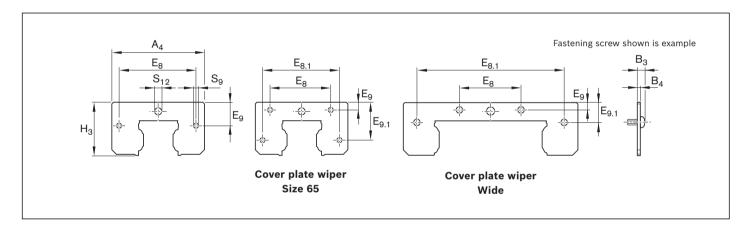

Size	Part number for	Dimensio	ns (mm)									Mass
	ball guide rail										İ	(g)
	with cover strip	A <sub>4</sub>	$B_3$	$B_4$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	$H_3$	$S_9$	S <sub>12</sub>	
15	R1620 110 30	33.0	3.1	1.0	24.55	_	6.30	_	19.2	3.5	4.6	5
20	R1620 810 30	42.0	3.4	1.0	32.40	_	6.80	-	24.8	4.0	5.1	6
	R1620 810 35 <sup>3)</sup>	41.0	3.4	1.0	30.50	_	5.10	_	22.8	4.0	4.0	5
25	R1620 210 30	47.0	3.4	1.0	38.30	_	11.00	_	29.5	4.0	7.0	8
	R1620 210 35 <sup>3)</sup>	47.0	3.4	1.0	38.30	_	8.00	_	26.5	4.0	4.0	7
30	R1620 710 30	59.0	3.4	1.0	48.40	_	14.10	_	34.7	4.0	7.0	12
35	R1620 310 40 <sup>1)</sup>	69.0	3.4	1.0	58.00	_	17.00	_	40.1	4.0	7.0	16
45	R1620 410 40 <sup>1)</sup>	85.0	5.1	2.0	69.80	_	20.50	_	50.0	5.0	7.0	50
55	R1620 510 40 <sup>1)</sup>	98.0	5.7	2.0	80.00	_	21.80	_	56.4	6.0	7.0	65
65	R1620 610 40 <sup>1)</sup>	124.0	5.6	2.5	76.00	100.0	10.00	52.50	74.7	5.0	9.0	140
20/404)5)	R1670 510 00 <sup>2)</sup>	60.0	3.1	1.0	18.00	53.4	2.65	7.35	21.7	3.5	4.0	7
25/70 <sup>4)</sup>	R1670 210 10 <sup>2)</sup>	101.0	3.4	1.0	35.00	83.5	4.35	10.75	29.1	4.0	7.0	14
35/90 <sup>4)</sup>	R1670 310 10 <sup>2)</sup>	129.0	3.4	1.0	79.00	116.0	5.60	28.70	40.8	4.0	7.0	25

- 1) Part number for ball guide rail without cover strip: R1620 .10 30
- 2) Ball guide rail without cover strip
- 3) For ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)
- 4) Wide ball rail system
- 5) Caution: Cover plate wiper, not combinable with ball guide rail R167.8...!

### Front seal

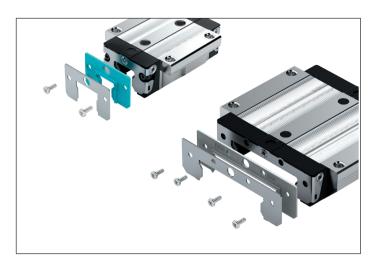


#### Two-piece

- Material: Corrosion-resistant steel as per DIN EN 10088 with plastic seals
- Design: bright

#### Instruction for mounting

- ► The fastening screws are included.
- Observe the minimum screw-in depth for the end-face lube connection.
- ► Observe the mounting instructions.

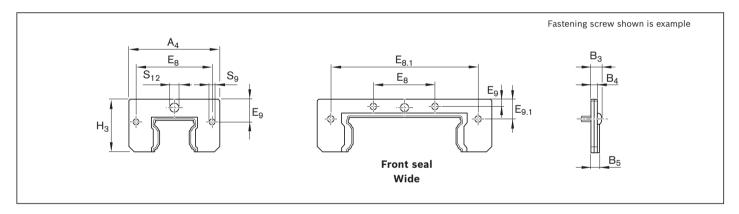

Size	Material number	Dimensio	ons (mm)	)									Mass
		A <sub>4</sub>	$B_3$	$B_4$	$B_5$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	H <sub>3</sub>	S <sub>9</sub>	S <sub>12</sub>	(g)
15	R1619 121 20	32.0	4.3	2.2	3.0	24.55	_	6.30		19.0	3.5	4.3	6.0
20 <sup>1)</sup>	R1619 821 20	42.0	4.9	2.5	3.3	32.40	_	6.80	_	24.3	4.0	5.1	8.0
25 <sup>1)</sup>	R1619 221 30	47.0	4.9	2.5	3.3	38.30	-	11.00	_	29.0	4.0	7.0	10.0
30	R1619 721 30	59.0	5.7	3.3	4.5	48.40	_	14.10	_	34.5	4.0	7.0	18.0
35	R1619 321 30	69.0	5.7	3.3	4.5	58.00	_	17.00	_	39.5	4.0	7.0	25.0
45	R1619 421 30	85.0	7.1	4.0	5.5	69.80	_	20.50	_	49.5	5.0	7.0	55.0
55	R1619 521 30	98.0	7.7	4.0	5.5	80.00	_	21.50	_	56.0	6.0	7.0	65.0
20/402)3)	R1619 522 20	60.0	4.6	2.5	3.3	18.00	53.4	2.65	7.35	21.7	3.5	4.0	7.5
25/70 <sup>2)</sup>	R1619 222 20	99.0	4.9	2.5	3.3	35.00	83.5	4.30	10.70	28.6	4.0	7.3	14.5
35/90 <sup>2)</sup>	R1619 322 20	128.6	5.7	3.3	4.5	79.00	116.0	5.80	28.90	41.0	4.0	7.0	40.0

- 1) Not for ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)
- 2) Wide ball rail system
- 3) Caution: The new front seal is not combinable with existing ball guide rail R167. 8.. ..!

### FKM seal

#### Two-piece


- Material: Corrosion-resistant steel as per DIN EN 10088 and seal made of FKM
- See Selection criteria/Seals for the area of application and resistance

#### Special feature

Simple assembly/removal on fixed ball guide rail

#### **Instruction for mounting**

- The fastening screws are included.
- Observe the minimum screw-in depth for the end-face lube connection.
- ▶ Observe the mounting instructions.

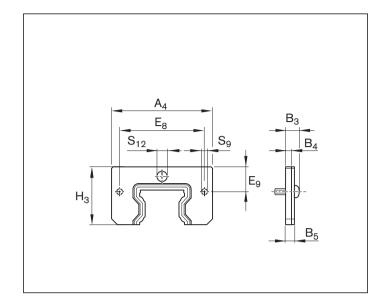


Size	Material number	Dimensions	vimensions (mm)											
		<b>A</b> <sub>4</sub>	$B_3$	$B_4$	$B_5$	E <sub>8</sub>	E <sub>9</sub>	$H_3$	S <sub>9</sub>	S <sub>12</sub>	(g)			
35	R1619 320 30	69	8.4	4	6	58.0	17.0	39.5	4	7	39.0			
45	R1619 420 30	85	9.1	4	6	69.8	20.5	49.5	5	7	61.0			
55	R1619 520 30	98	9.7	4	6	80.0	21.8	56.4	6	7	80.5			

#### One-piece

Material: Corrosion-resistant steel as per DIN EN 10088 and seal made of FKM.


#### Instruction for mounting

- The fastening screws are included.
- Observe the minimum screw-in depth for the end-face lube connection.
- Observe the mounting instructions.

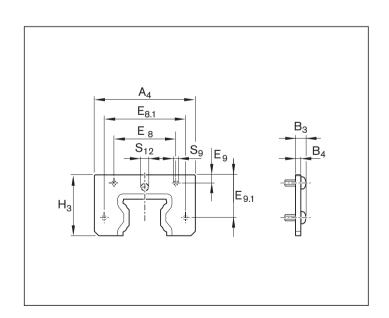

Size	Material number	Dimension	Dimensions (mm)									
		A <sub>4</sub>	$B_3$	$B_4$	E <sub>8</sub>	E <sub>8.1</sub>	E <sub>9</sub>	E <sub>9.1</sub>	$H_3$	$S_9$	S <sub>12</sub>	(g)
65	R1619 620 30	124	9.6	6.5	76	100	10	52.5	74.7	5	9	146


## Seal kit

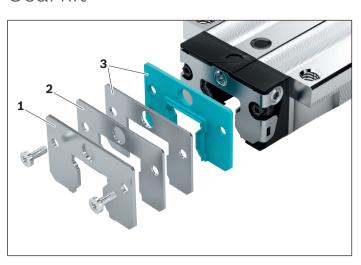

- 1 Cover plate wiper
- 2 Reinforcing plate
- 3 Two-piece front seal

#### Instruction for mounting

- ► The seal kit is recommended when combining the cover plate wiper with a two-piece front seal.
- The fastening screws are included.
- Observe the minimum screw-in depth for the end-face lube connection.
- ▶ Observe the mounting instructions.

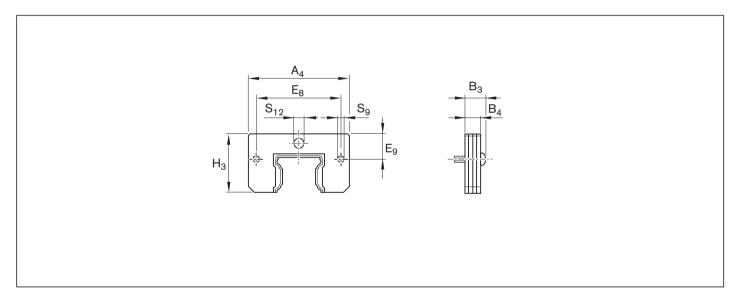

Size	Part number for ball	guide rail	Dimensi	Dimensions (mm)										
	without cover strip	with cover strip	<b>A</b> <sub>4</sub>	$B_3$	$B_4$	E <sub>8</sub>	E <sub>9</sub>	$H_3$	S <sub>9</sub>	S <sub>12</sub>	(g)			
15	R1619 120 50	R1619 120 50	32.0	6.3	4.2	24.55	6.30	19.0	3.5	4.3	16			
20 <sup>1)</sup>	R1619 820 50	R1619 820 50	42.0	6.9	4.5	32.40	6.80	24.3	4.0	5.1	20			
25 <sup>1)</sup>	R1619 220 50	R1619 220 50	47.0	6.9	4.5	38.30	11.00	29.0	4.0	7.0	26			
30	R1619 720 50	R1619 720 50	59.0	8.2	5.8	48.40	14.10	34.5	4.0	7.0	42			
35	R1619 320 40	R1619 320 50	69.0	8.2	5.8	58.00	17.00	39.5	4.0	7.0	57			
45	R1619 420 40	R1619 420 50	85.0	11.1	8.0	69.80	20.50	49.5	5.0	7.0	155			
55	R1619 520 40	R1619 520 50	98.0	11.7	8.0	80.00	21.50	56.0	6.0	7.0	195			

1) Not for ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)

## Lubrication adapter




For oil and grease lubrication from above, only for high ball runner blocks SNH R1621 or SLH R1624

Material: Plastic Packaging unit: 1 unit

### **Instruction for mounting**

- ► O-rings are provided.
- ▶ Before mounting, use a heated pointed metal tool to open the lube hole on the ball runner block (but not a drill).
- ► For more details, see the "Lubrication and maintenance"

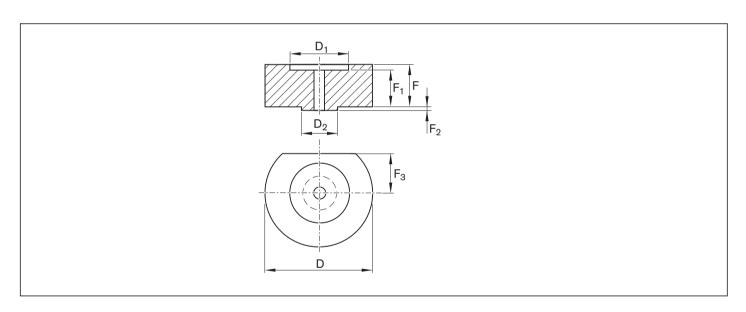

Size	Material number	Dimensions (mm	)	'	'	'	'		Mass
		D	$D_{i}$	$D_2$	F	$F_1$	$F_2$	F <sub>3</sub>	(g)
15	R1621 100 05	12	6.2	3.4	3.7	3.1	0.5	3.20	0.5
25	R1621 200 05	15	7.2	4.4	3.8	3.2	0.5	5.85	0.9
30	R1621 700 05	16	7.2	4.4	2.8	2.2	0.5	6.10	0.7
35	R1621 300 05	18	7.2	4.4	6.8	6.2	0.5	6.80	2.2
45	R1621 400 05	20	7.2	4.4	9.8	9.2	0.5	8.30	4.1

## Lubrication plate




### For standard lube nipples

► Material: Aluminum

### **Instruction for mounting**

- ▶ The required mounting parts are included.
- Sizes 15 20: A funnel-type lube nipple with a knock-in spigot is included.
- Sizes 25 65: The lube nipple of the ball runner block can be used.
- Observe the mounting instructions.

⚠ The enclosed lube pin (1) must be mounted between the lubrication plate and the ball runner block! (It contains a lubrication hole.)

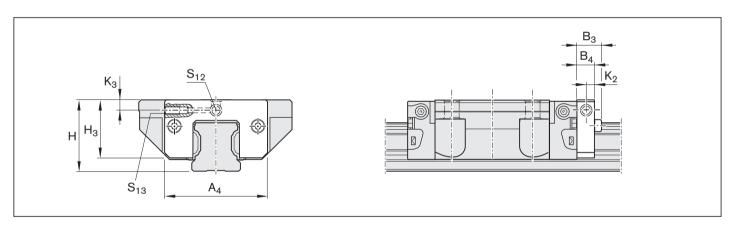

Size	Material number	Dimensions	(mm)		'						Mass
		A <sub>4</sub>	$B_3$	$B_4$	Н	$H_3^{2)}$	$K_2$	$K_3^{2)}$	S <sub>12</sub>	S <sub>13</sub>	(g)
15	R1620 111 20	32	13.1	11	24	19.0	5.5	3.4	М3	Ø3	15
					283)			$7.4^{3)}$			
20 <sup>1)</sup>	R1620 811 20	42	15.0	12	30	24.8	6.0	3.5	M3	Ø3	25
25 <sup>1)</sup>	R1620 211 20	47	15.0	12	36	28.3	6.0	6.0	M6	M6	30
					403)			10.03)			
30	R1620 711 20	59	15.0	12	42	33.8	6.0	8.0	M6	M6	45
					45 <sup>3)</sup>			$11.0^{3)}$			
35	R1620 311 20	69	15.0	12	48	39.1	6.0	8.0	M6	M6	60
					$55^{3)}$			$15.0^{3)}$			
45	R1620 411 20	85	16.0	12	60	48.5	6.0	8.0	M6	M6	85
					703)			18.0 <sup>3)</sup>			
55	R1620 511 20	98	17.0	12	70	56.0	6.0	9.0	M6	M6	115
					803)			19.0 <sup>3)</sup>			
65	R1620 611 20	124	18.0	14	90	75.7	7.0	18.0	M8x1	M8x1	250

- 1) Not for ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)
- 2) Based on the mounting face of the ball runner block
- 3) For ball runner blocks S.H (slimline ... high)


## Lubrication plate G 1/8

### For lube nipples G 1/8

► Material: Aluminum

### Instruction for mounting

- ► The required mounting parts are included.
- Ball runner block S.. (slimline ... ...)
   Size 25: Observe the side projection of the lubrication plate.
- Observe the mounting instructions.

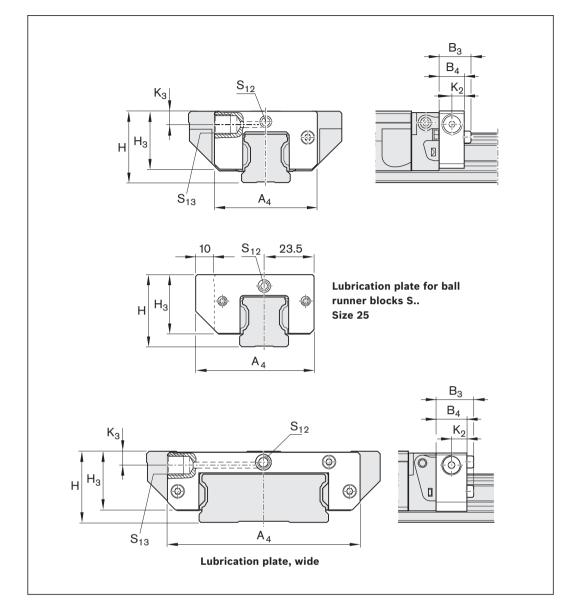

Size	Material number	Dimensions	s (mm)								Mass
		A <sub>4</sub>	$B_3$	$B_4$	Н	$H_3^{2)}$	$K_2$	$K_3^{2)}$	S <sub>12</sub>	S <sub>13</sub>	(g)
25 <sup>1)</sup>	R1620 211 30	57	19.0	16	36 40 <sup>3)</sup>	28.3	8	7.0 11.0 <sup>3)</sup>	M6	G 1/8x8	40
30	R1620 711 30	59	19.0	16	42 45 <sup>3)</sup>	33.8	8	7.0 10.0 <sup>3)</sup>	M6	G 1/8x8	59
35	R1620 311 30	69	19.0	16	48 55 <sup>3)</sup>	39.1	8	8.0 15.0 <sup>3)</sup>	M6	G 1/8x8	79
45	R1620 411 30	85	20.0	16	60 70 <sup>3)</sup>	48.5	8	8.0 18.0 <sup>3)</sup>	M6	G 1/8x8	112
55	R1620 511 30	98	21.0	16	70 80 <sup>3)</sup>	56.0	8	9.0 19.0 <sup>3)</sup>	M6	G 1/8x8	152
65	R1620 611 30	124	20.0	16	90	75.7	8	18.0	M6	G 1/8x8	285
25/70 <sup>4)</sup>	R1670 211 40	99	19.0	16	35	29.6	8	8.4	M6	G 1/8x8	65
35/90 <sup>4)</sup>	R1670 311 30	129	19.0	16	50	42.0	8	9.5	M6	G 1/8x8	120

- 1) Not for ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)
- 2) Based on the mounting face of the ball runner block
- 3) For ball runner blocks S.H (slimline ... high)
- 4) Wide ball rail system

## Transport lock




### **Transport lock for ball runner blocks**

### For transporting and as a mounting device

► Material: Plastic

Size	Material numbers	Mass (g)
15	R1653 101 89	2
20	R1653 801 89	3
25	R1653 202 89	4
30	R1653 702 89	10
35	R1653 302 89	10
45	R1653 402 89	20
55	R1653 502 89	31
65	R1653 602 89	58
20/40	R1671 505 89	7
25/70	R1671 201 89	13
35/90	R1671 301 89	33

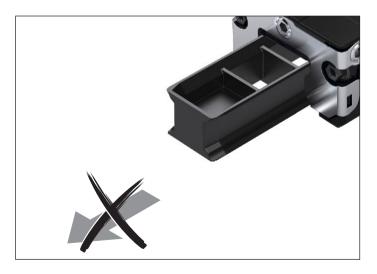

The ball runner block is slid from the transport lock onto the rail. See the chapter entitled "Instruction for mounting".


⚠ The transport lock must remain in the ball runner block until it slides onto the ball guide rail! Otherwise it is possible to lose the balls!

## Front lube units


### For travel up to 25 000 km without relubrication

### Advantages for mounting and operation

- ► For a travel distance of up to 25,000 km without re-lubrication
- ► Ball runner block only requires initial lubrication with grease
- ► Front lube units on both sides of the ball runner block
- ► Low lubricant loss
- Reduced oil consumption
- ▶ No lubrication lines
- ► Max. operating temperature 60°C
- ► Front lube unit can be refilled using the lube nipple on the end-face or at the side.
- ► Lube connection on the end-face of the front lube unit is suitable for lubricating the ball runner block with grease.

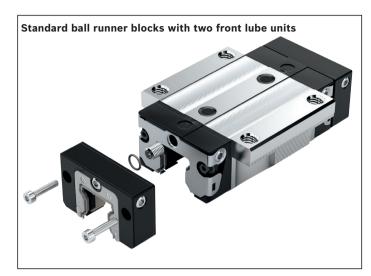

Size	Possible travel distance s
	with front
	lubrication units
	(km)
15	15000
20*)	15000
25*)	25 000
30	25 000
35	25 000
45	25 000
55	1500
65	1000

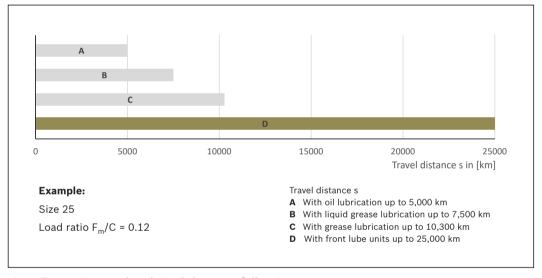


Part numbers, dimensional drawing, dimensions and technical data see following page.

\*) Low ball runner blocks of type FNN, SNN, FKN and SKN have shorter travel distances. See diagram 1 "Load-dependent relubrication intervals for ball runner blocks with front lube units".

#### **Lubricant distribution**

Due to the special design of the lubricant distribution, lubrication occurs primarily where it is needed: directly on the raceways and the top surfaces of the ball guide rails.

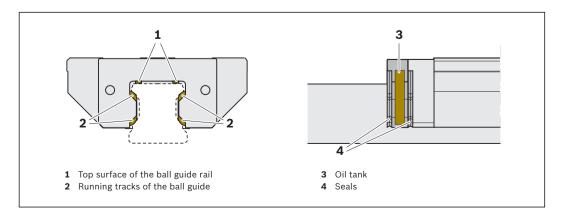

### Front lube unit R1619 .2. 00

Material: special plastic

The front lube units R1619 .2. 00 are supplied ready-filled with oil (Mobil SHC 639) and can be mounted after basic lubrication of the ball runner blocks.

### Front lube unit R1619 .2. 10

Material: special plastic


The front lube units R1619 .2. 10 are not filled at the factory.

### **Recommended lubricant oil** for initial filling:

▶ Mobil SHC 639 (viscosity 1000 mm2/s at 40 °C)

An initial lubrication of the ball runner blocks with grease **lubricant** is required before mounting the front lube units! See section "Lubrication".

If other types of lubricant oil are used, please consider the compatibility of the lubricants and the travel distance!

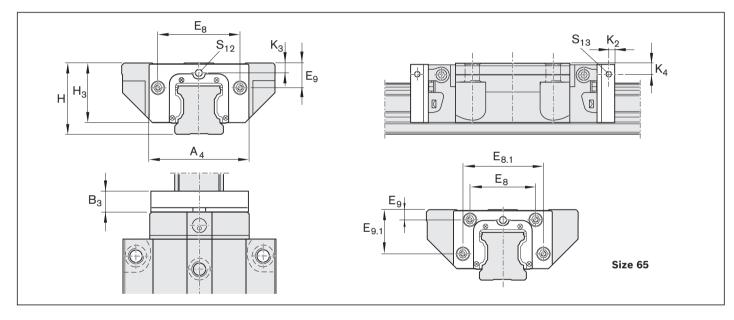

Size	Material number	Dimens	ions (n	nm)										Oil	Mass
		A <sub>4</sub>	$B_3$	E <sub>8</sub>	E <sub>8.1</sub>	$E_9^{2)}$	$E_{9.1}^{2)}$	Н	$H_3^{2)}$	$K_2$	$K_3^{2)}/K_4^{2)}$	S <sub>12</sub>	S <sub>13</sub>	(cm <sup>3</sup> )	(g)
15	R1619 125 00	31.8	11.5	24.55	_	6.70	_	24	19.40	5	3.35	МЗ	МЗ	1.00	15
						10.703)		283)	$23.40^{3}$		$7.35^{3)}$				
20	R1619 825 00	43.0	12.5	32.50	_	7.30	-	30	24.90	5	3.70	МЗ	МЗ	2.20	20
	R1619 826 00 <sup>1)</sup>	41.0	12.5	30.50	-	5.60	_	28	22.90	-	3.10	_	МЗ	1.80	20
25	R1619 225 00	47.0	13.0	38.30	-	11.50	_	36	29.30	5	5.50	M6	M6	2.60	25
						$15.50^{3)}$		$40^{3)}$	$33.30^{3)}$		$9.50^{3)}$				
	R1619 226 00 <sup>1)</sup>	47.0	13.0	38.30	_	8.50	_	33	26.30	5	4.10	МЗ	МЗ	2.50	25
30	R1619 725 00	58.8	14.5	48.40	-	14.60	_	42	35.05	6	6.05	M6	M6	3.85	35
						17.60 <sup>3)</sup>		$45^{3)}$	$38.05^{3)}$		$9.05^{3)}$				
35	R1619 325 00	69.0	16.0	58.00	_	17.35	_	48	39.85	6	6.90	M6	M6	5.70	50
						24.35 <sup>3)</sup>		$55^{3)}$	46.85 <sup>3)</sup>		$13.90^{3)}$				
45	R1619 425 00	84.0	17.0	69.80	_	20.90	_	60	49.80	7	8.20	M6	M6	9.60	70
						30.903)		703)	59.80 <sup>3)</sup>		18.20 <sup>3)</sup>				
55	R1619 525 00	99.0	18.0	80.00	_	22.30	_	70	57.05	8	8.90	M6	M6	14.50	90
						32.303)		803)	67.05 <sup>3)</sup>		18.90 <sup>3)</sup>				
65	R1619 625 00	124.2	19.0	76.00	100	11.00	53.5	90	75.70	8	16.00	M8	M8	30.00	130

- 1) For ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)
- 2) Based on the mounting face of the ball runner block
- 3) For ball runner blocks S.H (slimline ... high)

## Front lube units

### Initial filling of a front lube unit without oil

- Remove the set screw from the lubrication hole (Fig. 1, item 1) and keep for later use.
- ► Screw in lube nipple (2).
- ▶ Lie the front lube unit (3) down flat, fill with quantity of oil as per table 1, and leave it to lie for around 36 hours.
- ► Check whether the lube insert is completely soaked with oil. If necessary, add oil.
- ► Remove lube nipple.
- Screw in the set screw
- ► For size 20 low profile: Stand the front lube units in 10 mm of oil for approx. 36 hours (see fig. 2).




Figure 1




Figure 2

#### Size Oil quantity for initial filling of a front lube unit without oil (cm³) 15 20 2.00 25 2.40 30 3.85 35 5.70 45 9.60 55 14.50 65 30.00

Table 1

### **Relubrication of front lube units**

If the relubrication interval according to diagram 1 has been reached, relubricate the amount stated in table 1.

- ▶ The units can be relubricated through the lube connection at the side.
- The front lube unit size 20 low is **not** refillable via the lube connection (see figure 2).

#### Note

Rexroth recommends replacing the front lube units every 3 years at the latest and re-lubricating the ball runner block before mounting the new front lube unit.

#### Relubrication of the ball runner blocks

In clean operating environments, the ball runner blocks can be relubricated with grease (Dynalub 510) at the end-face. Relubrication of the ball runner blocks with grease lubricant see the "Lubrication" chapter

Alf other lubricants are used, this may lead to a reduction in the lubrication intervals, performance losses in short stroke applications and the load capacities. Possible chemical interactions between the plastic materials, lubricants and preservative oils must also be taken into account.

The recommended lubrication intervals depend on environmental factors, load and load type.

Examples of environmental factors include swarf, mineral abrasion (or similar), solvent and temperature. Examples of loads and stress types are oscillations, shocks and tilting.


🛕 The conditions of use are unknown to the manufacturer. Only the user's own trials or accurate monitoring can yield safety across lubrication intervals.


⚠ Do not use water-based coolant/lubricant on the ball guide rails and ball runner block!

### Load-dependent relubrication intervals for ball runner blocks with front lube units This applies to the following conditions:

- ▶ Ball runner block lubricants: Dynalub 510 (grease NLGI 2), alternatively Castrol Tribol GR 100-2 PD or Elkalube GLS 135/N2
- ► Front lube units lubricant: Mobil SHC 639 (synthetic oil)
- Maximum speed:  $v_{max} = 2 \text{ m/s}$
- No media pressurization
- Standard seals (SS)
- Ambient temperature: T = 10 40 °C





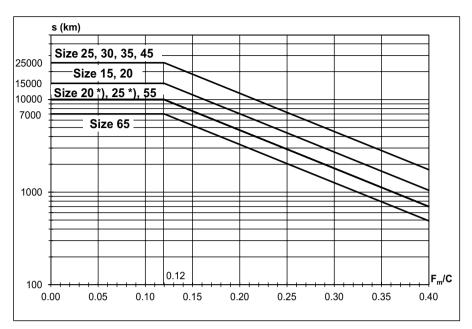

\*) ball runner blocks F.N (flange ... low) and S.N. (slimline ... low)

### Mounting of front lube units

### Instruction for mounting

The required mounting accessories (coated screws, seals and lube nipples) are supplied along with the units. Mount a front lube unit on both sides of the ball runner block (fig. 3, pos. 3)!

Do not remove the ball runner block from the ball guide rail!

#### Ball runner blocks up to size 45 (fig. 3a):

The enclosed lube pin (2) must be mounted between the lubrication plate and the ball runner block! (It contains a lubrication hole.)


- Remove the set screws (1).
- Screw in the lube pin (2).
- Slide on the front lube units (3).
- Insert o-rings (5) between the ball runner block and front lube units.
- Tighten screws (4) to tightening torque  $M_A$  (see table 2).


### Ball runner blocks from size 55 (fig. 3b):

- ▶ Slide on the front lube units (3).
- ▶ Remove the set screws (1) and insert the o-rings (5) between the ball runner block and front lube units.
- ▶ Tighten screws (4) to tightening torque  $M_A$  (see table 2).


Size	(X)	Tightening torque M <sub>A</sub>
	Pos. 4	(Nm)
15	M2.5 x 12	0.3
20	M3 x 14	0.6
25	M3 x 14	0.6
30	M3 x 14	1.2
35	M3 x 16	1.2
45	M4 x 18	1.6
55	M5 x 18	2.0
65	M4 x 20	1.6

Table 2

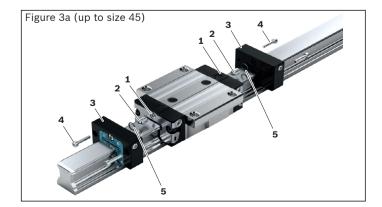

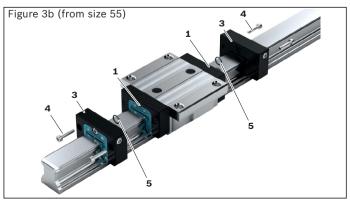

## Bellows

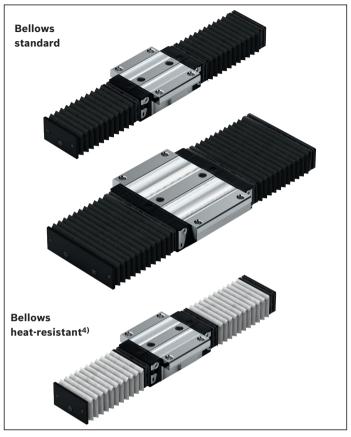

### Standard bellows R1620 .0. 00

- ► Material: Polyurethane-coated polyester fabric
- Aluminum lubrication plate

### Heat-resistant bellows<sup>4)</sup> R1620 .5. 00

▶ Material: Nomex fabric, metalized

### **Temperature stability**

- ▶ Non combustible, non flammable
- ▶ Resistant to sparks, welding spatter and hot chips
- ► The protective metal coating can withstand peak temperatures of up to 200 °C
- ▶ Operating temperature for the total bellows max. 80 °C

Size	Part number, fold count											
			<b>G</b>									
	Type 1: with lubrication plate <sup>1)</sup> and end plate  Type 6: with VSE <sup>2)</sup> and end plate	Type 2: with fastening frame and end plate	Type 3: with 2 lubrication plates <sup>1)</sup> Type 7: with 2 VSE <sup>2)</sup>									
	Standard bellows											
15	R1620 10. 00,	R1620 102 00,	R1620 10. 00,									
20	R1620 80. 00,	R1620 802 00,	R1620 80. 00,									
25	R1620 20. 00,	R1620 202 00,	R1620 20. 00,									
30	R1620 70. 00,	R1620 702 00,	R1620 70. 00,									
35	R1620 30. 00,	R1620 302 00,	R1620 30. 00,									
45	R1620 40. 00,	R1620 402 00,	R1620 40. 00,									
55	R1620 50. 00,	R1620 502 00,	R1620 50. 00,									
65	R1620 60. 00,	R1620 602 00,	R1620 60. 00,									
20/403)	-	R1670 502 00,	-									
25/70 <sup>3)</sup>	-	R1670 202 00,	-									
35/90 <sup>3)</sup>	-	R1670 302 00,	-									
	Heat-resistant bellows <sup>4)</sup>		·									
25	R1620 25. 00,	R1620 252 00,	R1620 25. 00,									
30	R1620 75. 00,	R1620 752 00,	R1620 75. 00,									
35	R1620 35. 00,	R1620 352 00,	R1620 35. 00,									
45	R1620 45. 00,	R1620 452 00,	R1620 45. 00,									
55	R1620 55. 00,	R1620 552 00,	R1620 55. 00,									
65	R1620 65. 00,	R1620 652 00,	R1620 65. 00,									

Size	Part number, fold count		
	Type 4: with 2 fastening frames	Type 5: with lubrication plate <sup>1)</sup> and fastening frame Type 8: with VSE <sup>2)</sup> and fastening frame	Type 9: Loose bellows (spare part)
	Standard bellows		1
15	R1620 104 00,	R1620 10. 00,	R1600 109 00,
20	R1620 804 00,	R1620 80. 00,	R1600 809 00,
25	R1620 204 00,	R1620 20. 00,	R1600 209 00,
30	R1620 704 00,	R1620 70. 00,	R1600 709 00,
35	R1620 304 00,	R1620 30. 00,	R1600 309 00,
45	R1620 404 00,	R1620 40. 00,	R1600 409 00,
55	R1620 504 00,	R1620 50. 00,	R1600 509 00,
65	R1620 604 00,	R1620 60. 00,	R1600 609 00,
20/40 <sup>3)</sup>	R1670 504 00,	-	R1670 509 00,
25/70 <sup>3)</sup>	R1670 204 00,	-	R1670 209 00,
35/90 <sup>3)</sup>	R1670 304 00,	-	R1670 309 00,
	Heat-resistant bellows <sup>4)</sup>		•
25	R1620 254 00,	R1620 25. 00,	R1600 259 00,
30	R1620 754 00,	R1620 75. 00,	R1600 759 00,
35	R1620 354 00,	R1620 35. 00,	R1600 359 00,
45	R1620 454 00,	R1620 45. 00,	R1600 459 00,
55	R1620 554 00,	R1620 55. 00,	R1600 559 00,
65	R1620 654 00,	R1620 65. 00,	R1600 659 00,

Weights on request

- 1) No lubrication plate necessary for ball runner blocks with side lube ports
- 2) VSE = front lube unit
- 3) Wide ball rail system
- 4) Note overall height (see dimensional drawing/dimensions of heat-resistant bellows)

### Order example:

► Bellows

Size 35

Standard

► Type 6 with VSE and end plate

▶ Number of folds: 36

Example: R1620 3 0 6 00, 36 Folding

**Standard** = 0Heatresistant Type 1 - 9


## Bellows

### Instruction for mounting

- ► The bellows are pre-assembled.
- ► The fastening screws are included.
- Bellows with lubrication plate (type 1, 3 5)
   Sizes 15 20:
   A funnel-type lube nipple with a knock-in spigot is included.

Sizes 25 – 65 and wide: The lube nipple of the ball runner block can be used.

- ► For type 1 and type 2, an M4x10 thread with 2 x 45° countersink must be placed in the end face of the ball guide rail SNS in each case. For ball guide rail BNS: Tap two threads at each end face.
- Observe the mounting instructions

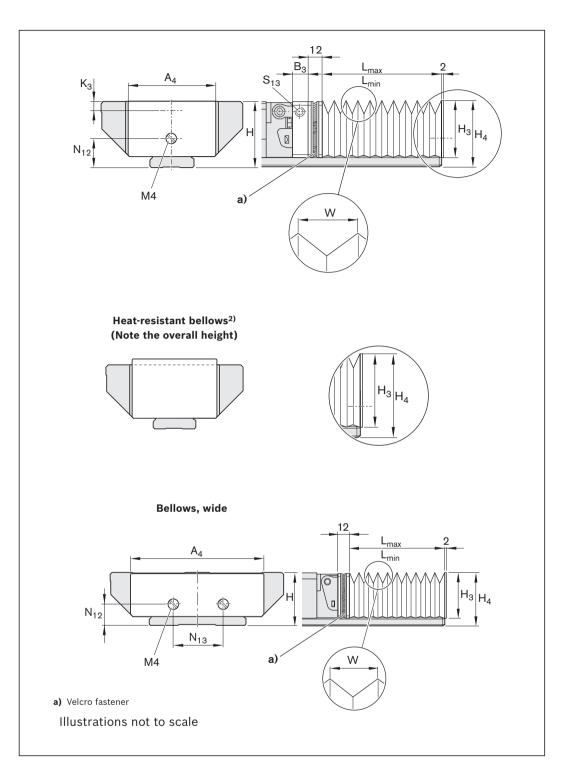

### Standard bellows

Size	Dimensions	(mm)									Factor
	A <sub>4</sub>	$B_3$	Н	$H_3$	$H_4$	K <sub>3</sub>	N <sub>12</sub>	N <sub>13</sub>	S <sub>13</sub>	W	U
15	45	11	24	26.5	31.5	3.4	11.0	-	M3	19.9	1.18
20	42	12	30	24.0	29.2	3.5	13.0	-	M3	10.3	1.33
25	45	12	36	28.5	35.0	6.0	15.0	_	МЗ	12.9	1.32
30	55	12	42	34.0	41.0	8.0	18.0	-	M6	15.4	1.25
35	64	12	48	39.0	47.0	8.0	22.0	-	M6	19.9	1.18
45	83	12	60	49.0	59.0	8.0	30.0	-	M6	26.9	1.13
55	96	12	70	56.0	69.0	9.0	30.0	-	M6	29.9	1.12
65	120	14	90	75.0	89.0	18.0	40.0	-	M8x1	40.4	1.08
20/401)	73	_	27	31.0	35.0	-	11.5	-	-	19.9	1.12
25/70 <sup>1)</sup>	101	_	35	29.0	35.0	-	14.0	26	-	12.9	1.25
35/90 <sup>1)</sup>	128	_	50	42.0	49.0	_	21.5	40	_	19.9	1.18

### Heat-resistant bellows<sup>2)</sup>


Size	Dimensions (	Dimensions (mm)											
	A <sub>4</sub>	$B_3$	Н	$H_3$	$H_4$	K <sub>3</sub>	N <sub>12</sub>	N <sub>13</sub>	S <sub>13</sub>	W	U		
25	62	12	36	39.0	44.5	6.0	15	_	M6	25.9	1.25		
30	67	12	42	42.0	47.5	8.0	18	_	M6	25.9	1.25		
35	74	12	48	47.0	54.0	8.0	22	_	M6	29.9	1.21		
45	88	12	60	55.0	64.0	8.0	30	_	M6	32.9	1.18		
55	102	12	70	63.0	75.0	9.0	30	_	M6	37.9	1.16		
65	134	14	90	86.0	99.0	18.0	40	_	M8x1	52.4	1.11		

W

1) Wide ball rail system

2) Observe the overall height (dimension  $H_4$  compared with dimension H)

### Calculation

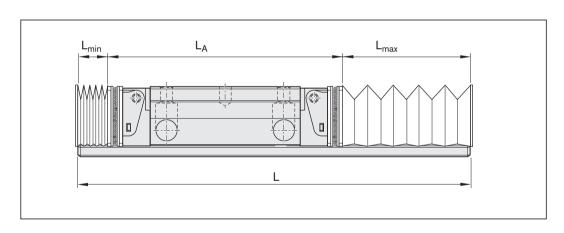

### **Bellows**

 $L_{max} = (stroke + 30) \cdot U$  $L_{\min} = L_{\max} - stroke$ Number of folds  $=\frac{L_{max}}{W} + 2$ 

= Bellows, elongated (mm)

= Bellows, contracted  $\mathsf{L}_{\mathsf{min}}$ (mm)

Stroke = Stroke (mm)

= Calculation factor U (-)

= Maximum bellows extraction

L = Ball guide rail length (mm)

 $L_A$ = Ball runner block length with fastening frame (mm)

### Ball guide rail length


$$L = L_{\min} + L_{\max} + L_{A}$$

(mm)

### 158

## Lube nipple, lube fittings, extensions

### Funnel-type lube nipple according to DIN 3405

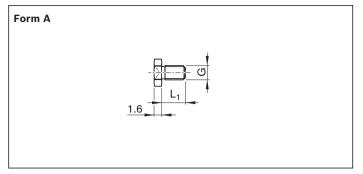


Form B		
	Se E U U U U U U U U U U U U U U U U U U	

Material	Dimensions (mm) Mass		
number	G	L <sub>1</sub>	(g)
R3417 029 09	M3	5	0.3
R3417 032 09 <sup>1)</sup>			

Material	Dimensions (mm)		Mass
number	G	L <sub>1</sub>	(g)
R3417 004 09	M3	5	1.5

1) Lube nipple Resist NR II made of corrosion resistant steel as per DIN EN 10088


### **Ball-type lube nipple**

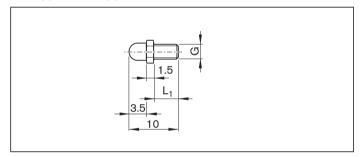

Material	Dimensions (mm)		Mass
number	G	$L_1$	(g)
R3417 005 01 <sup>1)</sup>	M3	5	0.5

1) Material: Brass


### Hydraulic-type lube nipple according to DIN 71412

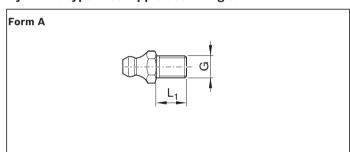


Material	Dimensions (mm) Mas		
number	G	$L_1$	(g)
R3417 008 02	M6	8	2.6
R3417 016 02 <sup>1)</sup>			

 Lube nipple Resist NR II made of corrosion resistant steel as per DIN EN 10088

### Hydraulic-type lube nipple according to DIN 71412

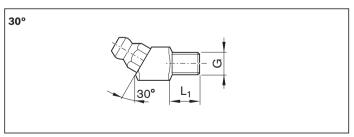


Material	Dimensions (mm)		Mass
number	G	L <sub>1</sub>	(g)
R3417 023 02	M6	8	7.4

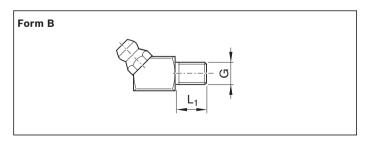

Material	Dimensions (mm)		Mass
number	G	L <sub>1</sub>	(g)
R3417 007 02	M6	8	7.4
R3417 006 02	M8x1	8	8.0


**Lube fittings** Plastic tube for lube connection

Plastic tube Ø 3 mm

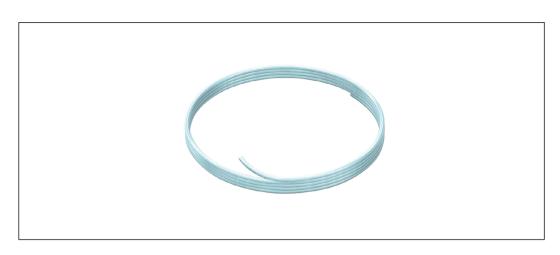


Material number	Dimensions			Mass
	External Ø(mm)	Internal Ø (mm)	Length (m)	(kg)
R3499 287 00	3	1.7	50	0.4

### **O-rings**

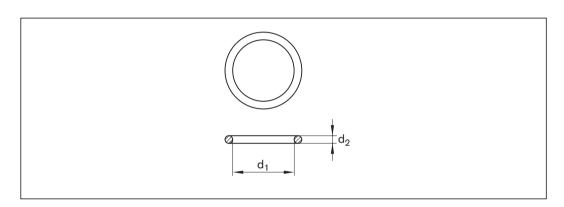

Material number	d <sub>1</sub> x d <sub>2</sub>	Mass
	(mm)	
R3411 130 01	4 x 1.0	
R3411 131 01	5 x 1.0	
R3411 003 01	6 x 1.5	0.03

### Nozzle pipe

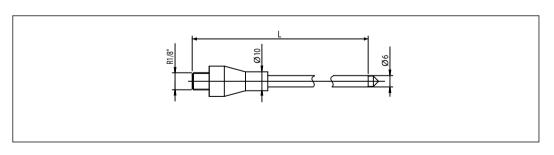



Material number	Dimensions (mm)	Mass
	L	(g)
R3455 030 44	200	158

## Lube nipple, lube fittings, extensions

### **Lube fittings**

### Reducers

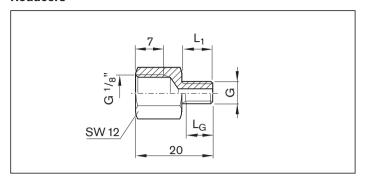


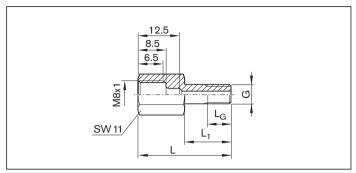

Material	Dimensions (	mm)		Mass
number	G	$L_1$	$L_{G}$	(g)
R3455 030 34	M6	8	6.5	7.5

Material	Dimension	Dimensions (mm)			Mass
number	G	L	$L_1$	$L_{G}$	(g)
R3455 030 53	M8x1	28.5	14.5	8	10

### **Extensions**

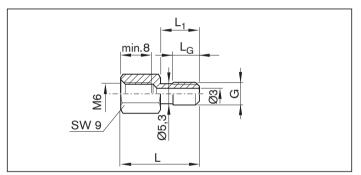



min. 5  L  S  S  S  S  S  S  S  S  S  S  S  S
---

Material	Mass				
number	G	L	$L_1$	$L_{G}$	(g)
R3455 030 69	M6	21.0	10.5	7	5.0
R3455 030 87	M6	25.0	14.5	8	5.5
R3455 030 85	M6	26.5	16.0	7	5.0

Material	Dimension	Mass			
number	G	L	$L_1$	L <sub>G</sub>	(g)
R3455 030 78	М3	16.5	8.5	6	2.5

### **Connectors**

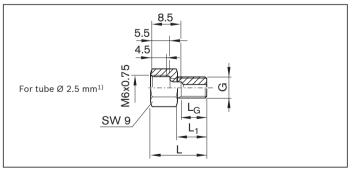




Material	Dimension	Mass			
number	G	L	$L_1$	$L_{G}$	(g)
R3455 030 38	M6	15.5	8	6.5	4.1

Material	Dimension	Mass			
number	G	L	$L_1$	L <sub>G</sub>	(g)
R3455 030 37	M6	22	8	6.5	8.8

1) For connections according to DIN 2353 (solderless tube fittings)

### **Swivel fittings**

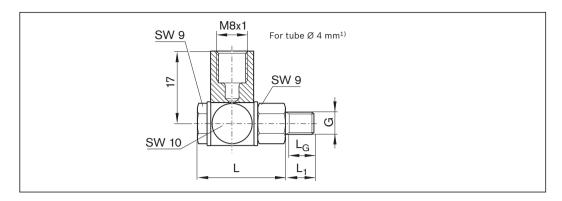


Material number	Dimensions (mm)				Mass
	G	L	$L_{i}$	L <sub>G</sub>	(g)
R3417 018 09	M6	21.5	8	6.5	18.6

1) For connections according to DIN 2353 (solderless tube fittings)

# Straight connectors Push-in fittings for plastic tubes and metal pipes


Not permitted for ball runner blocks with accessories on the end face

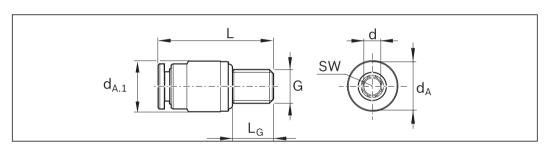

Material number	Dimension	Dimensions (mm)							
	d <sub>A</sub>	$d_{A.1}$	d±0.1	G	L	$L_{G}$	SW	(g)	
R3417 073 09	6.5	6.5	3	М3	16	5	$1.5^{1)}$	1.6	
R3417 074 09	6.5	8	3	M5	16	5	2	2.5	
R3417 075 09	9	9	4	M6	24.5	8	2.5	4.9	
R3417 076 09	11	11	6	M6	26	8	2.5	6.2	

1) Max. tightening torque  $M_A = 0.5 \text{ Nm}$ 

## Elbow plug-in connections turnable<sup>1)</sup>

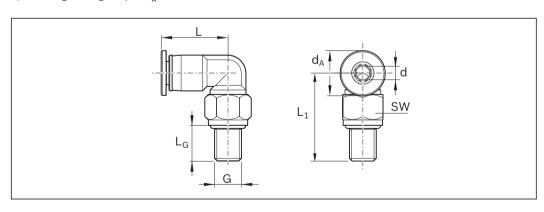

Material number	Dimensio	Dimensions (mm)							
	d <sub>A</sub>	d±0.1	G	L	$L_1$	$L_{G}$	sw	(g)	
R3417 077 09	6.5	3	М3	11.2	14.7	5	6 <sup>2)</sup>	3.8	
R3417 078 09	9	4	M6	18.1	18.1	8	9	10.8	
R3417 079 09	11	6	M6	20.8	18.1	8	9	12.9	

- 1) Max. lubrication pressure: 30 bar (exerting slow pressure with manual grease gun)
- 2) Max. tightening torque  $M_A = 0.5 \text{ Nm}$


## Product description


Rexroth offers limitless interchangeability as all ball guide rail versions can be combined at will with all accessories within each size.

The entire range is ideally geared to enable a top performance and meet all special requirements.

### Overview of accessories for ball guide rails

























## Cover strip

### Instruction for mounting the cover strip

Secure the cover strip!

▶ Observe the instruction for mounting! Please request the "Mounting instructions for cover strip".

### **Advantages**

The cover strip is easy to clip on and remove.

- ▶ This considerably facilitates and speeds up the mounting process:
  - ▶ No need to plug every single hole.
  - ▶ No time delay while waiting for adhesive to harden when using adhesive tape.
- Can be mounted and removed several times (up to four times).





- A Cover strip with snap fit (standard)
  - ► The cover strip is clipped on before the ball runner block is mounted and fits tightly.
- **B** Cover strip with sliding fit
  - ▶ For mounting or replacing a cover strip, if the ball runner block or connection structure cannot be removed.
  - ▶ A section of the snap fit cover strip is very slightly widened and can then be easily slid under the ball runner block.


An expanding tool for cover strips can be used to create a sliding fit after installation. In particular, the sliding length  $\boldsymbol{L}_{\boldsymbol{S}}$  can be adapted in accordance with the installation case.

**A** The cover strip is a precision-machined part that requires careful handling. Above all, it must not be bent. Risk of injury at the edges and ends of the cover strip! Wear gloves.

Part numbers, dimensional drawing, dimensions and gravity see following pages.

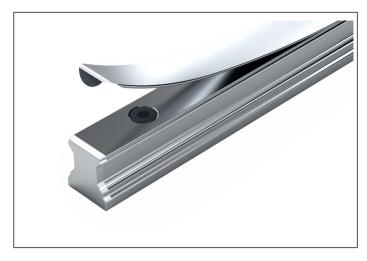



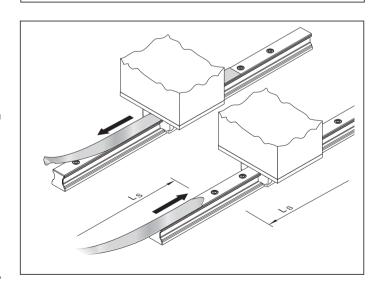

## Cover strip

### Loose cover strip

### For initial installation, storage and replacement

### Note


A suitable cover strip with snap fit or with sliding fit is available for each ball guide rail SNS.

### Ordering example 1 (standard cover strip with tight fit)


- ▶ Ball guide rail SNS
- Size 35
- Rail length L = 2696 mm

Material number:

R1619 330 20, 2696 mm

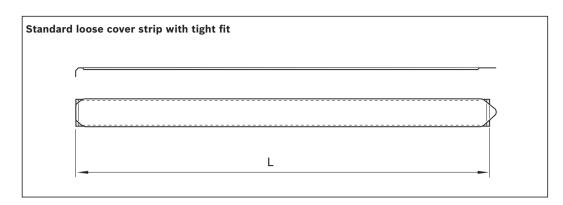

Size	Standard loose cover strip with tight fit	Mass
	Part number, rail length L (mm)	(g/m)
15	R1619 130 00,	10
20	R1619 830 00,	29
25	R1619 230 00,	32
30	R1619 730 00,	40
35	R1619 330 20,	80
45	R1619 430 20,	100
55	R1619 530 20,	120
65	R1619 630 20,	148

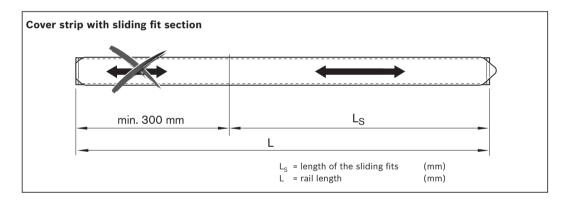

### Ordering example 2 (cover strip with sliding fit section)

- ► Ball guide rail SNS
- Size 35
- ► Rail length
  - L = 2696 mm
- ► Length of sliding fit section  $L_{\rm S}$  = 1200 mm

Material number:

R1619 330 30, 2696, 1200 mm

Size	Cover strip with sliding fit section	Mass
	Part number, rail length L (mm),	(g/m)
	Length of sliding fit section L <sub>S</sub> (mm)	
15	R1619 130 10,	10
20	R1619 830 10,	29
25	R1619 230 10,	32
30	R1619 730 10,	40
35	R1619 330 30,	80
45	R1619 430 30,	100
55	R1619 530 30,	120
65	R1619 630 30,	148

### **Expanding tool**

### For creating a sliding fit in the cover strip




Size	Material number	Mass
		(g)
15	R1619 115 10	40
20	R1619 815 10	50
25	R1619 215 10	80
30	R1619 715 10	100
35	R1619 315 30	100
45	R1619 415 30	130
55	R1619 515 30	210
65	R1619 615 30	270

### Cover strip mounting kit

### Mounting device and lift-off plate

### **Instruction for mounting**

► To clip on the cover strip, a mounting device (A) is available; for removal, there is a lift-off plate (B).

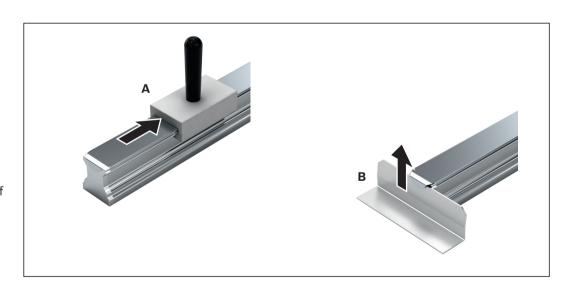

#### Size Mass Material number (g) 25 R1619 210 80 170 30 R1619 710 80 200 35 R1619 310 60 200 45 R1619 410 60 210 R1619 510 60 55 210 65 R1619 610 60 280

### Observe the instruction for mounting!

► Please request the "Mounting instructions for cover strip".

## Cover strip

### **Retainer for cover strip**

### Instruction for mounting

- ► Rexroth recommends the use of strip clamps:
- ▶ this prevents accidental lifting of the rail seal and infiltration of dirt
- Secures the cover strip





### Strip clamps For ball guide rails without threaded holes at the end faces

### Material:

- ► Aluminum strip clamps (anodized)
- ► Clamping screw and nut made of corrosion resistant steel as per DIN EN 10088

Size	Set (2 pieces per unit)		Bulk packaging (100 pieces per	unit)
			THE STATE OF THE PARTY OF THE P	
	Material number (unit)	Mass (g)	Material number (unit)	Mass (kg)
15	R1619 139 50	11	R1619 139 60	0.55
20	R1619 839 50	13	R1619 839 60	0.65
25	R1619 239 50	14	R1619 239 60	0.70
30	R1619 739 50	22	R1619 739 60	1.10
35	R1619 339 50	30	R1619 339 60	1.50
45	R1619 439 50	56	R1619 439 60	2.80
55	R1619 539 50	62	R1619 539 60	3.10
65	R1619 639 50	84	R1619 639 60	4.20

#### **Protective caps**

For ball guide rails with threaded holes at the end faces

### Material:

- ► Plastic protective cap, black
- ► Screw made of corrosion resistant steel as per **DIN EN 10088**
- ▶ Washer made of galvanized steel

Size	Single cap		Set (2 pieces per unit wit	h screw)	Bulk packaging		
			One One One One One One One One One One				
	Material number	Weight	Material number	Mass	Part number/piece	Mass	
	(without screw)	(g)	(unit)	(g)	(without screws)	(kg)	
15	R1619 139 00	0.8	R1619 139 20	5.5	R1619 139 01 / 1000	0.8	
20	R1619 839 00	0.9	R1619 839 20	6.0	R1619 839 01 / 1000	0.9	
25	R1619 239 00	1.0	R1619 239 20	7.0	R1619 239 01 / 1000	1.3	
30	R1619 739 00	1.7	R1619 739 20	9.0	R1619 739 01 / 1000	1.7	
35	R1619 339 00	2.0	R1619 339 20	10.0	R1619 339 01 / 1000	2.5	
45	R1619 439 00	4.0	R1619 439 20	13.0	R1619 439 01 / 700	2.6	
55	R1619 539 00	4.0	R1619 539 20	20.0	R1619 539 01 / 500	2.1	
65	R1619 639 00	6.0	R1619 639 20	20.0	R1619 639 01 / 300	1.7	

## Mounting hole plugs

### Plastic mounting hole plugs

Size	Single cap	
	Material numbers	Mass (g)
15	R1605 100 80	0.05
20	R1605 800 80	0.10
25	R1605 200 80	0.30
30	R1605 300 80	0.60
35	R1605 300 80	0.60
45	R1605 400 80	1.00
55	R1605 500 80	1.70
65	R1605 600 80	2.10
20/40	R1605 100 80	0.05
25/70	R1605 200 80	0.30
35/90	R1605 300 80	0.60



Note

▶ Observe the instruction for mounting! Please request the "Mounting instructions for ball rail systems."

### Mounting hole plugs made of steel

Size	Single cap made of machining steel	
	Material numbers	Mass (g)
25	R1606 200 75	2
30	R1606 300 75	3
35	R1606 300 75	3
45	R1606 400 75	6
55	R1606 500 75	8
65	R1606 600 75	9
25/70	R1606 200 75	2
35/90	R1606 300 75	3



**Notes** 

► Mounting hole plugs made of steel are not included in the scope of delivery of the ball guide rails.

### Order the mounting tool too!

► Observe the instruction for mounting!

Please request the "Mounting instructions for ball rail systems."

### Mounting tool for mounting hole plugs made of steel


Two-piece,

### with assembly instructions


The two-piece mounting tool is suitable for mounting hole plugs in built-in ball guide rail.

Size	Material	Mass
	numbers	(kg)
25	R1619 210 00 <sup>1)</sup>	0.37
30	R1619 710 00 <sup>1)</sup>	0.37
35	R1619 310 10	0.57
45	R1619 410 10	0.85
55	R1619 510 10	1.50
65	R1619 610 00 <sup>1)</sup>	1.85
25/70	R1619 210 40	0.75
35/90	R1619 310 40	1.05

1) Can only be delivered as one part.

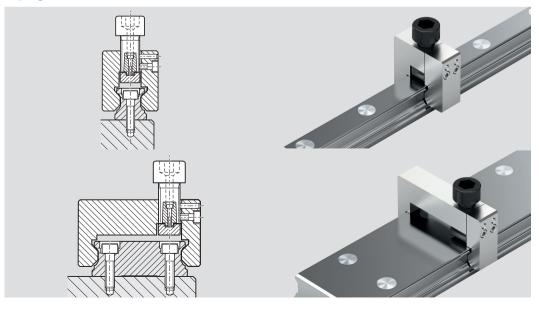


## Mounting runner block

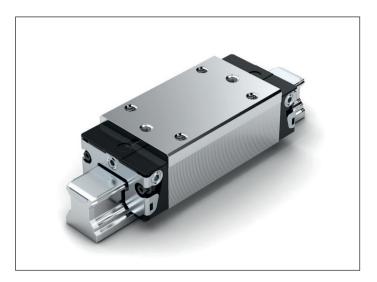

### **Mounting runner block**

- ► For highly accurate parallel alignment of ball rail systems (types SNS and SNO)
- ► For joint alignment of multi-piece ball guide rails (types SNS and SNO).

Size	Material numbers	Dimensions (mm)				Mass
		A	В	Т	D	(kg)
15	R1629 121 90	34	72.6	43	6	0.2
20	R1629 821 90	44	91	55	6	0.5
25	R1629 221 90	48	107.9	60	8	0.8
30	R1629 721 90	60	119.7	75	10	1.1
35	R1629 321 90	70	139	80	10	2.2
45	R1629 421 90	86	174.1	105	15	4.1
55	R1629 521 90	100	199	120	18	6.0
65	R1629 621 90	126	243	150	20	9.8

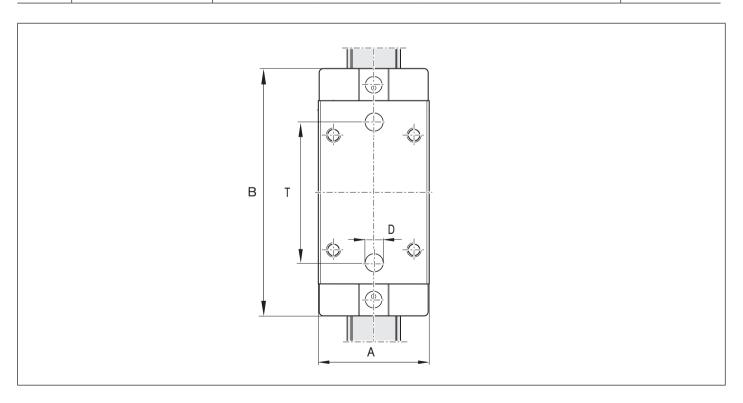


### Mounting with mounting runner block

### Alignment of parallel rails

- 1 Align and mount the first ball guide rail using a graduated straightedge.
- 2 Set up a mounting bridge with dial gauge between the ball runner blocks.
- 3 Move both ball runner blocks in parallel until the holes D of the mounting runner block are exactly over two mounting holes of the rail (provided that the drilling distances of the rail correspond to the spacing T).
- 4 Align the ball guide rail manually until the dial gauge shows the correct dimension.
- **5** Tighten the screws through the mounting runner block.

### Alignment of the multi-piece rails

- 1 Slide the multi-piece rails together at the joint.
- 2 Slide the mounting runner block over the center of the joint until both screw heads are visible. This is the case when the hole center distance of the joint corresponds to hole spacing T. If this is not the case, continue with point 5.
- 3 The mounting runner block automatically aligns the rails at the joint.
- 4 Tighten the screws through the mounting runner block.
- 5 If the screw center distances of the guide rail at the joint are not equal to the spacing and deviate from the hole spacing of the mounting runner block, each screw must be tightened individually and then moved to the next hole.

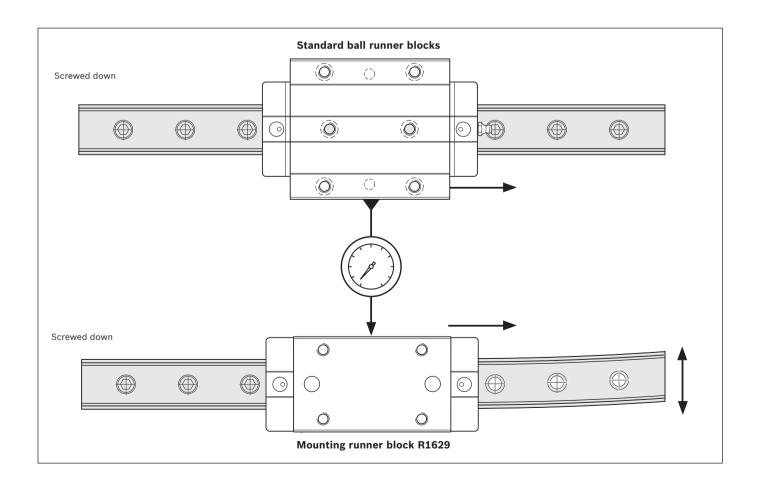

## V-guide

### V-guide


# Lateral retention of ball guide rails


► Material: Steel

► Design: black finished

#### Note

 Observe the instruction for mounting!
 Please request the "Mounting instructions for ball rail systems."

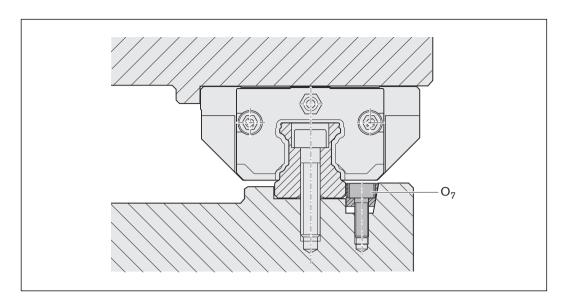

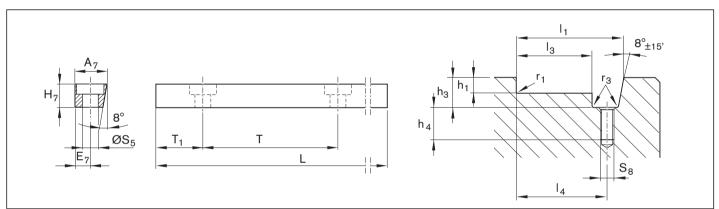

### V-guide

Size	Material number	Dimensions (n	nm)							Mass	
		A <sub>7</sub>	E <sub>7</sub>	$H_7$	L	O <sub>7</sub> 1)	$S_5$	T	T <sub>1</sub>	(kg)	
15	R1619 200 01	12.0	6	10	957	M5x20	6.0	60	28.5	0.8	
20											
25											
30											
35											
45	R1619 400 01	19.0	9	16	942	M8x25	9.0	105	51.0	2.0	
55											
65											

1) Screw O<sub>7</sub> according to DIN 6912

### V-guide groove

Size	Dimensions (mm)					'			
	h <sub>1-0.2</sub>	h <sub>3</sub> +1	h <sub>4</sub> +2	l <sub>1</sub> ± 0.05	l <sub>3</sub> -0.1	I <sub>4</sub> ± 0.1	r <sub>1 max</sub>	r <sub>3 max</sub>	S <sub>8</sub>
15	3.5	12.5	15	27	14.9	21	0.4	0.5	M5
20	4.0	12.5	15	32	19.9	26	0.5	0.5	M5
25	4.0	12.5	15	35	22.9	29	0.8	0.5	M5
30	5.0	12.5	15	40	27.9	34	0.8	0.5	M5
35	6.0	12.5	15	46	33.9	40	0.8	0.5	M5
45	8.0	19.0	16	64	44.9	54	0.8	0.5	M8
55	10.0	19.0	16	72	52.9	62	1.2	0.5	M8
65	10.0	19.0	16	82	62.9	72	1.2	0.5	M8

## Cardboard box opener



- Tool for opening the guide rails packaging.
- ► Prevents risk of injury

### Ordering data

Material number R320105175

## Product description hydraulic clamping and braking units

### Areas of application

### Clamping

- ▶ During mounting work and standstill of the machine with energy with hydraulic clamping and braking units of heavy handling systems
- Clamping of machine tables from heavily machined machining centers

#### **Brakes**

Support as brake for linear motors of heavy handling systems

#### Characteristic features

- Very high axial holding forces
- Dynamic and static stabilization in the axial direction
- Heavy-duty brake

### **Further highlights**

- Up to 1 million clamping cycles.
- Up to 2,000 emergency braking operations
- ▶ Threaded on both sides for the hydraulic connection
- ▶ Solid, rigid steel housing, chemically nickel-plated
- ▶ High positioning accuracy
- ► Release pressure 150 bar
- ► Integrated all-round sealing
- ► Special pressure diaphragm technology for maximum functional reliability without pressure losses or leakage
- Brake shoes with integrated positive-locking, large-surface contact profiles for maximum axial rigidity
- Super heavy-duty model

### Special features of hydraulic clamping and braking units:

- ► Low displacement
- Compact design, compatible with DIN 645
- 10 million clamping cycles (B10d value)

A Observe the safety instructions on clamping and braking units.


### **Functional principle**


### Hydraulic pressure: 50 - 150 bar Clamps and brakes with compression

The large-scale clamping profiles are pressed directly through the hydraulic oil via a piston principle to the flanks of the ball guide rail.

### Hydraulic pressure: 0 bar **Decompression with spring force**

A preloaded return spring allows for short decompression cycles.





#### KBH, FLS



#### **KBH, SLS**



### **Additional information**

### **Hydraulic connections**

The hydraulic clamping units are pre-filled with HLP 46 at the factory. The hydraulic connection is attached on two sides. One connection is suitable for pressurization. Take care when venting fixed and flexible hydraulic lines because air ports can damage sealing elements.

#### Connection structure, mounting the clamping units

To prevent detrimental effects, e.g. permanent grinding on the linear guide, the connection structure must be rigid and in accordance with its load and requirements. If the clamping units tilt, this can result in contact, wear and therefore damage to the linear guide.

The setting at the factory is adapted for the linear guide and may not be altered when mounting. It is imperative to observe the mounting instructions for the clamping and braking units and the linear guides.

Some spring-loaded accumulators are equipped with a transport lock between the contact profiles.

This must be removed when mounting by pressurizing the unit. When pressure is removed, the transport lock or the associated linear guide must always lie between the contact profiles.

The clamping units do not have any guiding function. A runner block can therefore not be replaced with a clamping unit.

The ideal position of the clamping unit lies between two runner blocks.

When using several clamping units, these should be distributed evenly on both guide rails in order to attain a maximum rigidity of the overall construction.

#### Lubrication

When using the prescribed pressurizing medium, lubrication is not required.

#### Surface protection

All housings of the Clamping Units are chemically nickel-plated and therefore have limited rust protection. Aluminum subsections are chemically nickel-plated or hard-coated according to their requirement.

### B10d value

The B10d-value specifies the number of switching cycles until 10% of components fail dangerously.

## Hydraulic clamping and braking units, KBH, FLS



#### FLS

### Flanged, long, standard height R1619 .40 21

#### Note

Can be used on all SNS ball guide rails.


### Clamps and brakes with compression

- Max. hydraulic operating pressure:
  - ▶ Size 25: 100 bar
  - ▶ Size 35 65: 150 bar
- Operating temperature range t: 0 70 °C

### Note on lubrication

- ► Initial filling of hydraulic oil HLP46
- ► Check for compatibility when using different oils

▲ Observe the safety instructions on clamping and braking units.

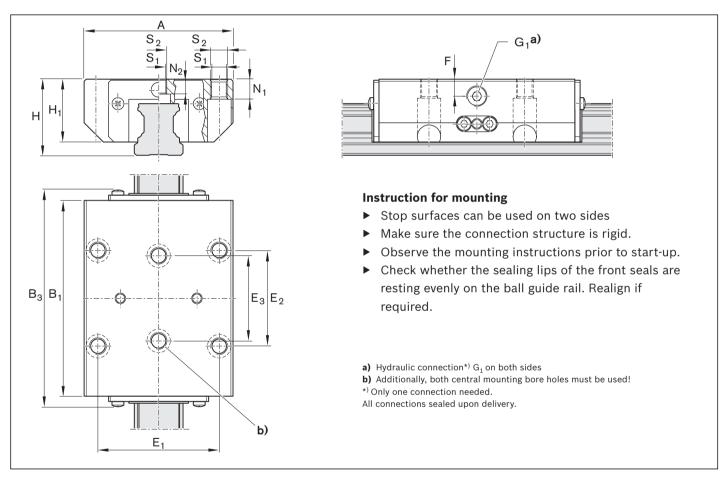

Size	Material	Holding	Dime	nsions	(mm)												Displacement <sup>6)</sup>	Mass
	number	force 1)																(kg)
		(N)	_	_	_			_	_		_	_	4	=>	_		, 0	
			A	B <sub>1</sub>	B <sub>3 max</sub>	Н	H <sub>1</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	F	G <sub>1</sub>	N <sub>1</sub> <sup>4)</sup>	N <sub>2</sub> <sup>5)</sup>	S <sub>1</sub>	S <sub>2</sub>	(cm <sup>3</sup> )	
25	R1619 240 21	2,2002)	70	92.0	102.3	36	29.5	57	45	40	8	1/8"	9	7.0	6.8	M8	0.6	1.10
35	R1619 340 21	5,700 <sup>3)</sup>	100	120.5	141.0	48	40.0	82	62	52	12	1/8"	12	10.2	8.6	M10	1.1	2.69
45	R1619 440 21	9,9003)	120	155.0	178.0	60	50.0	100	80	60	15	1/8"	15	12.4	10.5	M12	1.8	5.20
55	R1619 540 21	13,700 <sup>3)</sup>	140	184.0	209.0	70	57.0	116	95	70	16	1/8"	18	13.5	12.5	M14	2.4	8.40
65	R1619 640 21	22,700 <sup>3)</sup>	170	227.0	264.0	90	76.0	142	110	82	20	1/4"	23	14.0	14.5	M16	3.8	17.30

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).
- At 100 bar
- 3) At 150 bar

- 4) For mounting from below with ISO 4762
- 5) For mounting from below with DIN 7984
- 6) Per clamping

## Hydraulic clamping and braking units, KBH, SLS



### Slimline, long, standard height R1619 .40 20

Can be used on all SNS ball guide rails.


### Clamps and brakes with compression

- ► Max. hydraulic operating pressure:
- Size 65: 150 bar
- Operating temperature range t: 0 70 °C

#### Note on lubrication

- ► Initial filling of hydraulic oil HLP46
- ► Check for compatibility when using different oils

▲ Observe the safety instructions on clamping and braking units.

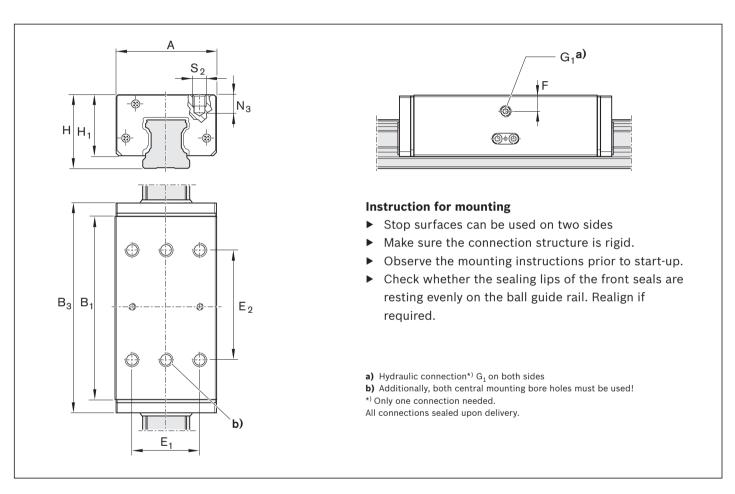

Size	Material number	Holding	Dimens	ions (n	nm)									Displacement <sup>3)</sup>	Mass
		force 1)													(kg)
		(N)													
			Α	B <sub>1</sub>	B <sub>3 max</sub>	Н	$H_1$	$E_1$	$E_2$	F	$G_1$	$N_3$	$S_2$	(cm <sup>3</sup> )	
65	R1619 640 20	22,700 <sup>2)</sup>	126	227	264	90	76	76	120	20	1/4"	21	M16	3.8	14.40

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).
- 2) At 100 bar
- 3) Per clamping

### Hydraulic clamping units product description

### Areas of application

- Clamping of heavy handling systems
- Clamping of machine tables from heavily machined machining centers

### Characteristic features

- ► Very high axial holding forces
- Compact design, compatible with DIN 645
- ▶ Dynamic and static stabilization in the axial direction

A Observe the safety instructions on clamping and braking units.

### **Further highlights**

- Threaded on both sides for the hydraulic connection
- Solid, rigid steel housing, chemically nickel-plated
- ► High positioning accuracy
- ► Continuously adjustable pressure from 50 150 bar
- ► Integrated all-round sealing
- Special pressure diaphragm technology for maximum functional reliability without pressure losses or leakage
- ▶ Integrated positive-locking, large-surface contact profiles for maximum axial rigidity


### Special features of the Hydraulic Clamping and **Braking Units:**

▶ 10 million clamping cycles (B10d value)


### **Functional principle**


### Hydraulic pressure: 50 - 150 bar Clamps with compression

The large-scale clamping profiles are pressed directly through the hydraulic oil via a piston principle to the flanks of the ball guide rail.




A preloaded return spring allows for short decompression cycles.






### Model overview of accessories for hydraulic clamping units


Hydraulic Clamping and Braking Units, FLS



Hydraulic Clamping and Braking Units,



Hydraulic Clamping and Braking Units,




## Technical data and calculations

## Normal forces and retaining forces

Measured values with the hydraulic clamping unit KWH, FLS, flanged, long, standard height Sizes 25 - 65

## Max. hydraulic operating pressure:

- ► Sizes 25 30: 100 bar
- ► Sizes 35 65: 150 bar

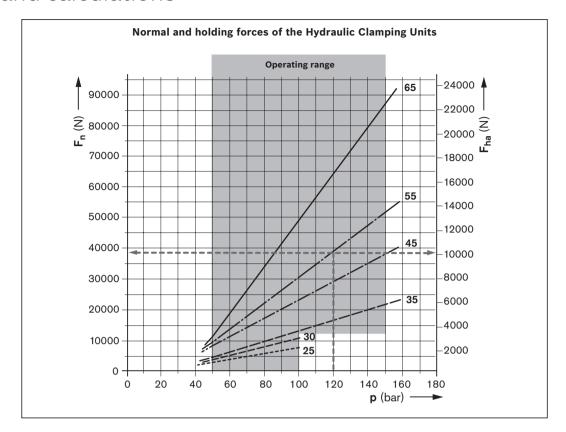

# Calculation of the holding force

Holding force for Hydraulic Clamping Units

$$F_{ha} = F_n \cdot 2 \cdot \mu_0$$

Normal (perpendicular) force (measured):  $F_n$  see diagram Stiction coefficient:  $\mu_0$  = 0.13 (approx.) for steel/steel, oiled, in relation to the ball guide rail

### Calculation example: Clamping unit KWH, size 55

Pressure: p = 120 bar

Normal (perpendicular) force:  $F_n = 38500 \text{ N}$  (see diagram) Holding force:  $F_{ha} = 38500 \text{ N} \cdot 2 \cdot 0.13$ 

= 10010 N

### Permissible holding force for Hydraulic Clamping Units

$$f_S$$
 = Safety factor (-)

$$F_{ha}$$
 = Holding force (N)  
(with  $\mu_0$  = 0.13)

$$F_{ha, perm}$$
 = Permissible holding

$$F_n$$
 = Normal (perpendicular)

$$\mu_0$$
 = Stiction coefficient (-)

$$F_{ha, perm} = F_{ha} / f_{S}$$

The safety factor  $f_S$  depends on:

- ▶ Vibrations
- Force surges
- ► Application-specific requirements etc.

### **Example: Clamping unit KWH, size 55**

Holding force:  $F_{ha} = 10010 \text{ N}$ 

(see calculation example)

Safety factor:  $f_S = 1.25$  (assumed) Permissible holding force:  $F_{ha, perm} = 10010 \text{ N} / 1.25$ 

≈ 8,000 N

## Hydraulic clamping units KWH, FLS



### FLS, flanged, long, standard height R1619 .42 11

#### Note

Can be used on all SNS ball guide rails.


### Clamps with compression


- ► Max. hydraulic operating pressure:
  - ▶ Sizes 25 30: 100 bar
  - ▶ Sizes 35-65: 150 bar
- ► Operating temperature range t: 0 70 °C


### Note on lubrication

- ► Initial filling of hydraulic oil HLP46
- ► Check for compatibility when using different oils

▲ Observe the safety instructions on clamping and braking units.







### Instruction for mounting

- ▶ Stop surfaces can be used on two sides
- Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to start-up.
- ▶ Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.
- a) Hydraulic connection\*) G<sub>1</sub> on both sides
- b) Additionally, both central mounting bore holes must be used!
- \*) Only one connection needed.

All connections sealed upon delivery.

Size	Material	Holding	ding Dimensions (mm)														Displacement <sup>6)</sup>	Mass
	number	force <sup>1)</sup>																(kg)
		(N)	Α	$B_1$	B <sub>3 max</sub>	Н	H <sub>1</sub>	E <sub>1</sub>	$E_2$	$E_3$	F	$G_1$	$N_1^{4)}$	$N_2^{5)}$	$S_1$	$S_2$	(cm <sup>3</sup> )	
25	R1619 242 11	2,2002)	70	92.0	102.3	36	29.5	57	45	40	8.0	1/8"	9	7.0	6.8	M8	0.6	1.22
30	R1619 742 11	3,0002)	90	103.5	115.4	42	35.0	72	52	44	10.5	1/8"	11	8.0	8.6	M10	0.7	2.09
35	R1619 342 11	5,700 <sup>3)</sup>	100	120.5	133.0	48	40.0	82	62	52	12.0	1/8"	12	10.2	8.6	M10	1.1	2.69
45	R1619 442 11	9,9003)	120	155.0	170.0	60	50.0	100	80	60	15.0	1/8"	15	12.4	10.5	M12	1.8	5.32
55	R1619 542 11	13,700 <sup>3)</sup>	140	184.0	201.0	70	57.0	116	95	70	16.0	1/8"	18	13.5	12.5	M14	2.4	8.40
65	R1619 642 11	22,7003)	170	227.0	256.0	90	76.0	142	110	82	20.0	1/4"	23	14.0	14.5	M16	3.8	17.30

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68). Permissible holding force 🗨 🗎 173
- At 100 bar
- 3) At 150 bar

- 4) For mounting from below with ISO 4762
- 5) For mounting from below with DIN 7984
- 6) Per clamping

## Hydraulic clamping units KWH, SLS



# SLS - Slimline, long, standard height R1619 .42 51

#### Note

Can be used on all SNS ball guide rails.


### Clamps with compression


- ► Max. hydraulic operating pressure:
  - ▶ Sizes 25 30: 100 bar
  - ▶ Size 35, 55, 65: 150 bar
  - ▶ Size 45: 110 bar
- ▶ Operating temperature range t: 0 70 °C

#### Note on lubrication

- ► Initial filling of hydraulic oil HLP46
- Check for compatibility when using different oils

A Observe the safety instructions on clamping and braking units.

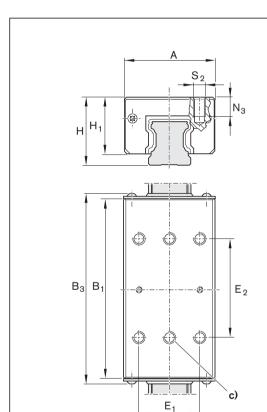



### Instruction for mounting

- ► Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to start-up.
- ► Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.
- a) Hydraulic connection\*)  $G_1$  on both sides
- **b)** Hydraulic connection\*)  $G_1$  on both sides for sizes 25 30
- c) In addition, both mounting holes must be used!
- \*) Only one connection needed.

All connections sealed upon delivery.

Size	Material	Holding	Dimen	<b>sions</b> (m	nm)					Displacement <sup>4)</sup>	Mass				
	number	force <sup>1)</sup>													(kg)
		(N)	Α	B <sub>1</sub>	B <sub>3 max</sub>	Н	H <sub>1</sub>	E <sub>1</sub>	$E_2$	F	$G_1$	$N_3$	S <sub>2</sub>	(cm <sup>3</sup> )	
25	R1619 242 51	1,6002)	48	92.0	102.3	36	29.5	35	50	8	1/8"	8	M6	0.6	1.22
30	R1619 742 51	3,0002)	60	103.5	115.4	42	35.0	40	60	9	1/8"	8	M8	0.7	2.09
35	R1619 342 51	3,500 <sup>2)</sup>	70	120.5	134.0	48	40.0	50	72	12	1/8"	13	M8	1.1	2.02
45	R1619 442 51	7,4002)	86	155.0	170.0	60	50.0	60	80	15	1/8"	15	M10	1.8	4.00
55	R1619 542-51	13,700 <sup>3)</sup>	100	184.0	201.0	70	57.0	75	95	16	1/8"	18	M12	2.4	6.10
65	R1619 642 51	22,700 <sup>3)</sup>	126	227.0	256.0	90	76.0	76	120	20	1/4"	21	M16	3.8	14.40

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68). Permissible holding force 🗈 173
- 2) At 100 bar
- **3)** At 150 bar
- 4) Per clamping

## Hydraulic clamping units KWH, SLH



### SLH - Slimline, long, high R1619 .42 31

#### Note

Can be used on all SNS ball guide rails.


### Clamps with compression


- ► Max. hydraulic operating pressure:
  - ▶ Sizes 25 30: 100 bar
  - ▶ Sizes 35, 55, 65: 150 bar
  - ▶ Size 45: 110 bar
- ► Operating temperature range t: 0 70 °C

### Note on lubrication

- ► Initial filling of hydraulic oil HLP46
- Check for compatibility when using different oils

A Observe the safety instructions on clamping and braking units.

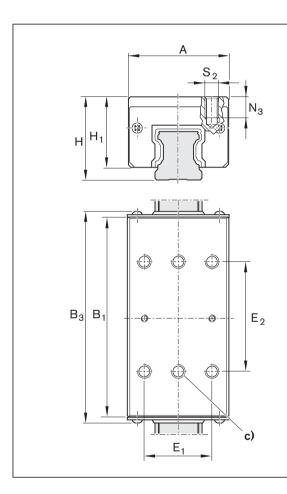



### Instruction for mounting

- ► Stop surfaces can be used on two sides
- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to start-up.
- ► Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.
- a) Hydraulic connection\*)  $G_1$  on both sides
- **b)** Hydraulic connection\*)  $G_1$  on both sides for sizes 25 30
- c) Additionally, both central mounting bore holes must be used!
- $^{\star)}$  Only one connection needed.
- All connections sealed upon delivery.

Size	Material number	Holding force <sup>1)</sup>		sions (m	m)									Displacement <sup>4)</sup>	<b>Mass</b> (kg)
		(N)	Α	$B_1$	B <sub>3 max</sub>	Н	H <sub>1</sub>	E <sub>1</sub>	$\mathbf{E_2}$	F	$G_1$	$N_3$	$S_2$	(cm <sup>3</sup> )	
25	R1619 242 31	1,600 <sup>2)</sup>	48	92.0	102.3	40	33.5	35	50	12	1/8"	12	M6	0.6	1.10
30	R1619 742 31	3,0002)	60	103.5	115.4	45	38.0	40	60	12	1/8"	11	M8	0.7	1.90
35	R1619 342 31	3,500 <sup>2)</sup>	70	120.5	134.0	55	47.0	50	72	18	1/8"	13	M8	1.1	2.46
45	R1619 442 31	7,400 <sup>2)</sup>	86	155.0	170.0	70	60.0	60	80	24	1/8"	18	M10	1.8	4.95
55	R1619 542 31	13,700 <sup>3)</sup>	100	184.0	201.0	80	67.0	75	95	26	1/8"	19	M12	2.4	7.90

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68). Permissible holding force 🗈 173
- **2)** At 100 bar
- 3) At 150 bar
- 4) Per clamping

### Pneumatic clamping and braking units, product description

#### Areas of application

#### Clamping

- ▶ In the event of loss of pressure
- ▶ During assembly work and standstill of the machine without energy
- ▶ of machine tables from machining centers
- ▶ of z-axis positioning in the resting position

#### **Brakes**

- ► In the event of energy failure
- ► In the event of a pressure drop
- ► Support of the emergency stop function
- Support as brake for linear motors

#### Characteristic features

- ► Clamps and brakes with spring energy accumulator
- ▶ Positive-locking integrated contact profiles ensure maximum axial and horizontal rigidity, and thus an excellent braking effect
- ▶ Dynamic and static stability in axial direction

#### **Special features MBPS/UBPS:**

▶ 5 million clamping cycles (B10d value)

A Observe the safety instructions on clamping and braking units.


#### **Functional principle**

#### Air pressure: 0 bar

#### Clamps and brakes with spring force


In the event of a pressure drop, the clamping or braking effect is generated via a dual acting gate valve gear mechanism, each with one spring assembly (spring energy accumulator).


An integrated quick-exhaust valve ensures short response times.



The clamping profiles are held apart by the compressed air.

▶ Free movement is possible

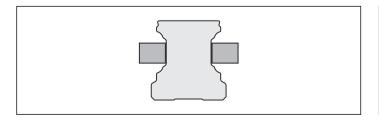



#### **Further highlights**

- ▶ Up to 1 million clamping cycles
- Up to 2,000 emergency braking operations
- ► Integrated all-round sealing
- ► High continuous output
- ► High positioning accuracy
- ► Mechanical gate valve gear mechanism
- ▶ Solid, rigid steel housing, chemically nickel-plated
- Low air consumption
- Maintenance-free


#### **Special features of MBPS:**

- ► Clamping and Braking Units in short format
- ► Add-ons with three pistons connected in series combined with strong springs result in holding forces up to 3 800 N at just 4.5 bar release pressure.
- ▶ 5 million clamping cycles (B10d value)¹)

#### Special features of UBPS:

- ▶ Very high axial holding forces of up to 7 700 N at 5.5 bar release pressure with high-power spring energy accumulator
- ▶ Increased holding force of up to 9,200 N thanks to additional pressurization on the air-plus port
- ► Extremely low air consumption
- ► Compact design, compatible with DIN 645
- ▶ 5 million clamping cycles (B10d value)¹)
- 1) B10d value is not achieved on air-plus port


#### **MBPS**

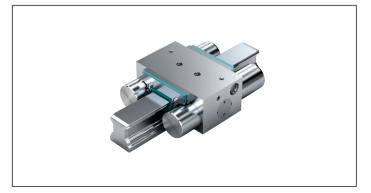

#### **UBPS**



### Pneumatic clamping and braking units MBPS

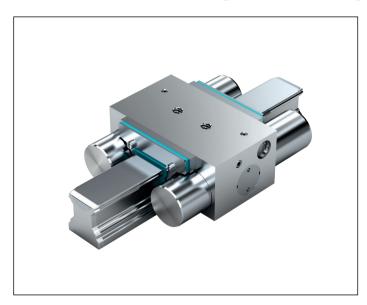

#### R1619 .40 31

#### Note

Can be used on all SNS ball guide rails.


# Clamps and brakes without pressurization (spring energy)

- ▶ Minimum release pressure 4.5 bar
- Maximum pneumatic operating pressure: 8 bar
- ► Operating temperature range t: 0 70°C

#### Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- Use only purified and lubricated air. The prescribed filter mesh size is 25 μm.
- Observe the mounting instructions prior to start-up.
- ► Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.


#### Circuitry<sup>1)</sup> for standard air port

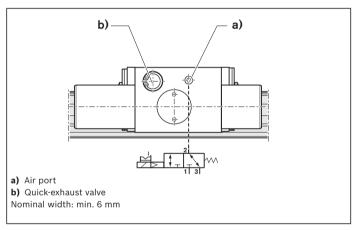

▲ Observe the safety instructions on clamping and braking units.

Size	Material number	Holding force	Air consumption (normal liter)
		Spring energy <sup>1)</sup>	Air port
		(N)	(dm³/stroke)
20	R1619 840 31	1000	0.034
25	R1619 240 31	1 300	0.048
30	R1619 740 31	2 000	0.065
35	R1619 340 31	2 600	0.093
45	R1619 440 31	3 600	0.099
55	R1619 540 31	4 700	0.244
65	R1619 640 31	4 700	0.244

<sup>1)</sup> Holding force by spring energy at 6 bar. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

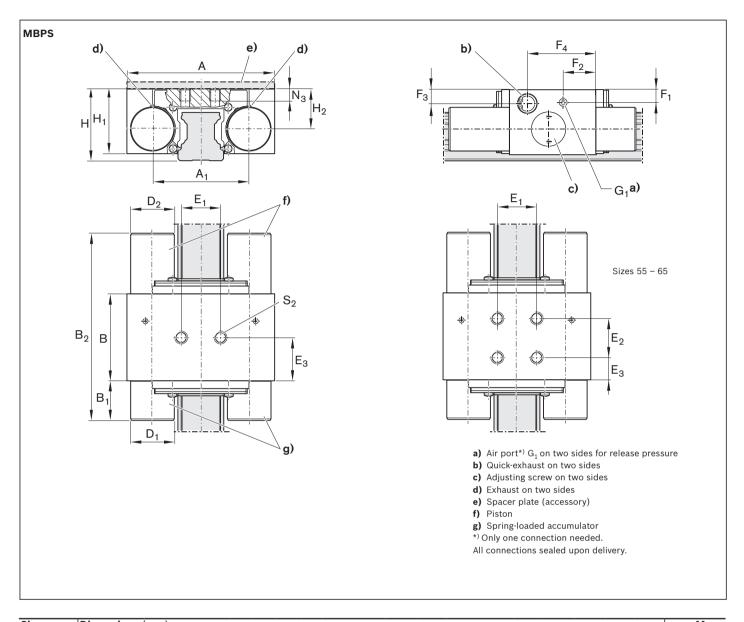


Size	Dime	nsions	(mm	1)																	Mass
	Α	$A_1$	В	$B_1$	B <sub>2 max</sub>	$D_1$	$D_2$	E <sub>1</sub>	$\mathbf{E_2}$	$E_3$	$F_1$	$F_2$	$F_3$	$F_4$	$G_1$	Н	$H_{1}^{1)}$	$H_2$	$N_3$	S <sub>2</sub>	(kg)
20	66	45.7	44	19.0	94.5	16	18	20	-	22.0	5.5	15.5	6.0	35.5	M5	30	25.8	16.2	8.6	M6	0.7
25	75	49.0	44	20.2	95.5	22	22	20	-	22.0	6.5	16.5	7.0	34.7	M5	36	32.5	20.0	8.0	M6	1.0
30	90	58.0	47	29.0	107.5	25	25	22	-	23.0	7.2	30.5	7.2	40.0	M5	42	38.5	24.0	9.0	M8	1.8
35	100	68.0	46	27.7	106.2	28	28	24	-	24.5	9.0	19.0	9.5	38.0	G1/8"	48	42.0	26.5	10.0	M8	1.9
45	120	78.8	49	32.2	113.7	30	30	26	-	24.5	15.0	31.1	12.2	41.6	G1/8"	60	52.0	35.5	15.0	M10	2.3
55	140	97.0	62	41.0	145.0	39	39	38	38	12.0	11.0	23.0	11.0	40.0	M5	70	59.0	38.0	18.0	M10	3.7
65	150	106.0	62	41.0	145.0	39	38	38	38	12.0	16.0	23.0	16.0	40.0	M5	90	75.5	53.5	18.0	M10	4.2

<sup>1)</sup> For ball runner block .H. (...high...) Spacer plate necessary.

### Pneumatic clamping and braking units UBPS




## Circuit type<sup>1)</sup> for standard air port



a) Air portb) Air filterNominal width: min. 6 mm

## Circuit type<sup>2)</sup> for air-plus port



a) Air portb) Air-plus portNominal width: min. 6 mm

#### R1619 .40 51

Very high axial holding forces due to three pistons connected in series combined with strong spring energy accumulator; increased holding force thanks to additional pressure through the air-plus port.

#### Note

Can be used on all SNS ball guide rails.

#### Clamps and brakes without pressurization (spring energy)

- ▶ Minimum release pressure 5.5 bar
- Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t:0 70 °C


#### Instruction for mounting

- Stop surfaces can be used on two sides.
- Make sure the connection structure is rigid.
- Use only purified and lubricated air. The prescribed filter mesh size is 25 μm.
- Observe the mounting instructions prior to start-up.
- ► Check whether the sealing lips of the front seals are resting evenly on the ball guide rail. Realign if required.

▲ Observe the safety instructions on clamping and braking units.

Size	Material number	Holding force		Air consumption (n	ormal liter)
		Spring energy <sup>1)</sup>	with air-plus port2)	Air port	Air-plus port
		(N)	(N)	(dm³/stroke)	(dm³/stroke)
25	R1619 240 51	1 500	2 650	0.080	0.165
30	R1619 740 51	2 500	3 300	0.111	0.274
35	R1619 340 51	2 800	3 800	0.139	0.303
45	R1619 440 51	5 200	7 600	0.153	0.483
55	R1619 540 51	7 700	9 200	0.554	0.952

- 1) Holding force achieved by spring energy. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).
- 2) Increased holding force by additional air admission at air-plus port with 6.0 bar. Switching via 5/2 or 5/3-way directional control valve.

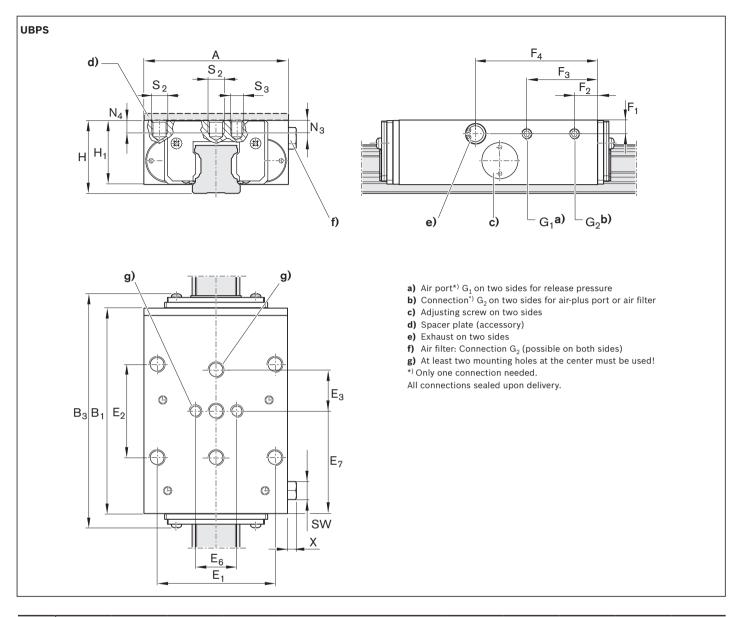

Size	Dimensions (mm)												
	A	$B_1$	B <sub>3 max</sub>	$E_1$	$E_2$	E <sub>3</sub>	E <sub>6</sub>	E <sub>7</sub>	F <sub>1</sub>	$F_2$	$F_3$	$F_4$	
25	70	99	115.1	57	45	20	20	49.5	6.5	11	34.3	59.0	
30	90	109	128.7	72	52	22	22	54.5	6.5	11	40.8	66.5	
35	100	109	131.0	82	62	26	24	54.5	8.0	11	40.8	66.5	
45	120	197	220.1	100	80	30	-	98.5	12	32	167	106.5	
55	140	197	221.6	116	95	35	-	98.5	13	32	165	103.5	

Size	Dimensions	limensions (mm)												
	G₁	$\mathbf{G_2}$	Н	$H_1^{1)}$	$N_3$	$N_4$	$S_2$	$S_3$	X	sw	(kg)			
25	M5	M5	36	31	7	7	M8	M6	5.5	Ø8, SW7	1.20			
30	M5	M5	42	37	8	8	M10	M8	5.5	Ø8, SW7	1.80			
35	G1/8"	G1/8"	48	42	10	10	M10	M8	6.5	Ø15, SW13	2.25			
45	G1/8"	G1/8"	60	52	-	12	M12	-	6.5	Ø15, SW13	6.20			
55	G1/8"	G1/8"	70	60	-	14	M14	-	6.5	Ø15, SW13	9.40			

<sup>1)</sup> For ball runner block .H. (...high...) Spacer plate necessary. Available on request.

### Product description pneumatic clamping units

#### Areas of application

- ▶ Pneumatic clamping of machine axes
- Table crossbars in the timber industry
- Positioning of lifting gear

#### Characteristic features

- ► High axial holding forces with short format
- ▶ Dynamic and static stability in axial direction
- ▶ Simple mechanical gripping principle in LCP and LCPS with good price/performance ratio

#### **Further highlights**

- ► Easy mounting
- ► Chemically nickel-plated steel housing
- ► High axial and horizontal rigidity
- Precise positioning

Special features of MK:

- ► Clamps with compression (pneumatic) The clamping profiles are pressed by compressed air onto the web surfaces of the ball guide rail via a dual acting gate valve gear mechanism.
- ► Continuously adjustable pressure from 4 8 bar
- ▶ Decompression with spring force. A preloaded return spring allows for short decompression cycles.
- ▶ 5 million clamping cycles (B10d value)

#### **Special features of MKS:**

- ▶ Clamps without pressurization (spring energy). In the event of a pressure drop, it clamps via the dual-action gate valve gear mechanism with two spring assemblies.
- ► An integrated quick-exhaust valve ensures short response times.
- ▶ Higher holding force due to the air-plus port
- ▶ Pneumatic decompression Release pressure 5.5 8 bar
- ▶ 5 million clamping cycles (B10d value) \*)

#### **Special features of LCP:**


- ► Clamps with compression (pneumatic) by means of mechanical gripping
- ► Continuously adjustable pressure from 5.5 8 bar
- ► Short decompression cycles
- ▶ Decompression with spring force. A preloaded return spring allows for short decompression cycles.

#### **Special features of LCPS:**

- ► Clamps without pressurization (with spring energy) by means of mechanical gripping with a spring assembly (spring energy accumulator)
- ► Release pressure 5.5 8 bar (pneumatic)
- ▶ Higher holding force due to the air-plus port
- ▶ Decompression with air pressure.
- \*) with the air-plus port, the B10d value cannot be achieved.


### A Observe the safety instructions on clamping and braking units.

#### **Functional principle**

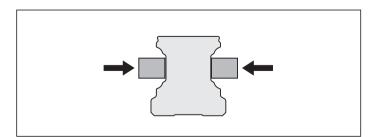

#### Clamping with air pressure or spring force

▶ The clamping profiles are pressed to the web surfaces of the ball guide rail.

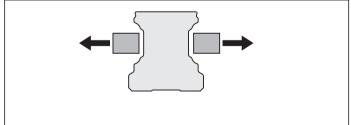

#### Decompression with air pressure or spring force

- ▶ The clamping profiles are held apart.
- ▶ Free movement is possible

### Model overview of accessories for pneumatic clamping units

MK MKS






LCPS LCP






## Pneumatic clamping units MK

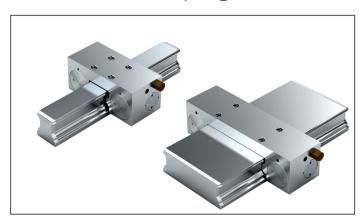

#### Circuit type1) for standard air port



a) Air port b) Air filter Nominal width: Sizes 15 - 20: min. 4 mm Sizes 25 - 65: min. 6 mm R1619 .42 60

#### Note

Can be used on all SNS ball guide rails.

#### R1619 .42 62

#### Note

Can be used on all BNS ball guide rails.

#### Clamps with compression

- Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 70°C


#### Instruction for mounting

- Make sure the connection structure is rigid.
- Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- Observe the mounting instructions prior to start-up.

⚠ Observe the safety instructions on clamping and braking units.

Size	Material number	Holding force	Air consumption (normal liter)
		pneumatic <sup>1)</sup>	Air port
		(N)	(dm³/stroke)
15	R1619 142 60	650	0.011
20	R1619 842 60	1 000	0.019
25	R1619 242 60	1 200	0.021
30	R1619 742 60	1 750	0.031
35	R1619 342 60	2 000	0.031
45	R1619 442 60	2 250	0.041
55	R1619 542 60	2 250	0.041
65	R1619 642 60	2 250	0.041
20/40	R1619 842 62	650	0.019
25/70	R1619 242 62	1 200	0.021
35/90	R1619 342 62	2 000	0.031

<sup>1)</sup> Holding force at 6 bar. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

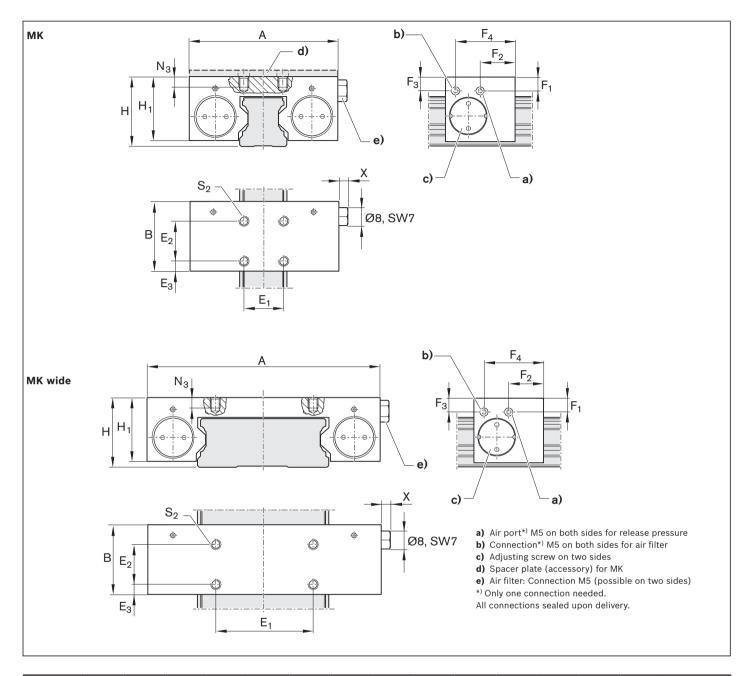


Size	Dimension	ns (mm)													Mass
	Α	В	$E_1$	$\mathbf{E_2}$	$E_3$	$F_1$	$F_2$	$F_3$	$F_4$	Н	$H_1^{1)}$	$N_3$	$S_2$	Х	(kg)
15	55	39	15	15	15.5	5.6	34.0	16.1	34.0	24	20.8	4.5	M4	6.5	0.25
20	66	39	20	20	9.0	4.5	17.3	6.0	34.5	30	27.0	6.0	M6	5.5	0.36
25	75	35	20	20	5.0	7.0	17.5	7.0	30.0	36	32.5	8.0	M6	5.5	0.45
30	90	39	22	22	8.5	8.5	15.0	10.3	24.5	42	38.5	9.0	M8	5.5	0.72
35	100	39	24	24	7.5	11.0	14.5	12.0	24.5	48	44.0	10.0	M8	5.5	0.88
45	120	49	26	26	11.5	14.5	19.5	14.5	29.5	60	52.0	15.0	M10	5.5	1.70
55	128	49	30	30	9.5	17.0	19.5	17.0	29.5	70	57.0	15.0	M10	5.5	1.95
65	138	49	30	30	9.5	14.5	19.5	14.5	29.5	90	73.5	20.0	M10	5.5	2.68
20/40	80	39	20	20	15.5	5.0	4.5	5.0	31.0	27	23.5	4.5	M4	5.5	0.37
25/70	120	35	50	20	5.0	7.0	17.5	9.0	30.0	35	32.5	8.0	M6	5.5	0.62
35/90	156	42	60	20	9.5	11.5	18.0	14.0	36.5	50	45.5	10.0	M10	5.5	0.88

<sup>1)</sup> For ball runner block .H. (...high...) Spacer plate necessary

### Pneumatic clamping units MKS




## Circuit type<sup>1)</sup> for standard air port



a) Air port
b) Air filter
Nominal width:
Sizes 15 - 20: min. 4 mm
Sizes 25 - 65: min. 6 mm

## Circuit type<sup>2)</sup> for air-plus port



a) Air port
b) Air-plus port
Nominal width:
Sizes 15 – 20: min. 4 mm
Sizes 25 – 65: min. 6 mm

#### R1619 .40 60

#### Note

Can be used on all SNS ball guide rails.

#### R1619 .40 62

#### Note

Can be used on all BNS ball guide rails.

#### Clamps without pressurization (spring energy)

- Minimum release pressure 5.5 bar
- Maximum pneumatic operating pressure: 8 bar
- ▶ Operating temperature range t: 0 70°C

#### Instruction for mounting


- ► Make sure the connection structure is rigid.
- Use only purified and lubricated air. The prescribed filter mesh size is 25 μm.
- Observe the mounting instructions prior to start-up.

▲ Observe the safety instructions on clamping and braking units.

Size	Material number	Holding force		Air consumption (no	rmal liter)
		Spring energy <sup>1)</sup>	with air-plus port2)	Air port	Air-plus port
		(N)	(N)	(dm³/stroke)	(dm³/stroke)
15	R1619 140 60	400	1 050	0.011	0.035
20	R1619 840 60	600	1 300	0.019	0.063
25	R1619 240 60	750	1 500	0.021	0.068
30	R1619 740 60	1 050	2 600	0.031	0.121
35	R1619 340 60	1 250	2 200	0.031	0.129
45	R1619 440 60	1 450	3 300	0.041	0.175
55	R1619 540 60	1 450	3 300	0.041	0.175
65	R1619 640 60	1 450	3 300	0.041	0.175
20/40	R1619 840 62	400	1 050	0.019	0.063
25/70	R1619 240 62	750	1 950	0.021	0.068
35/90	R1619 340 62	1 250	2 200	0.031	0.129

<sup>1)</sup> Holding force achieved by spring energy. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

<sup>2)</sup> Increased holding force by additional air admission at air-plus port with 6.0 bar. Switching via 5/2 or 5/3-way directional control valve.

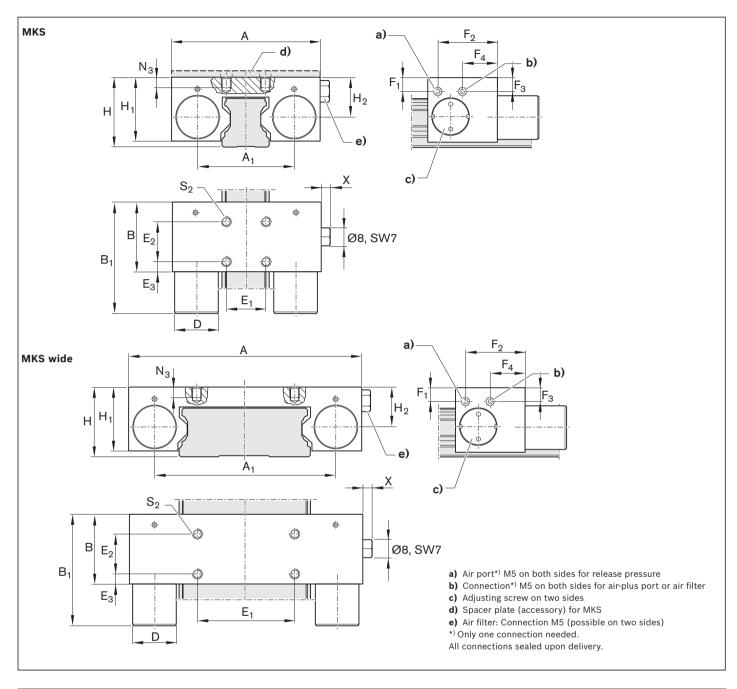


Size	Dimen	sions (	mm)																Mass
	Α	$A_1$	В	B <sub>1 max</sub>	D	E <sub>1</sub>	$E_2$	$E_3$	$F_1$	$F_2$	$F_3$	$F_4$	Н	$H_{1}^{1)}$	$H_2$	$N_3$	$S_2$	Х	(kg)
15	55	34.0	39	58.5	16	15	15	15.5	16.1	34.0	5.6	34.0	24	20.8	11.6	4.5	M4	6.5	0.29
20	66	43.0	39	61.5	20	20	20	9.0	6.0	34.5	4.5	17.3	30	27.0	15.5	6.0	M6	5.5	0.41
25	75	49.0	35	56.5	22	20	20	5.0	7.0	30.0	7.0	17.5	36	32.5	20.0	8.0	M6	5.5	0.50
30	90	58.0	39	68.5	25	22	22	8.5	10.3	24.5	8.5	15.0	42	38.5	24.0	9.0	M8	5.5	0.81
35	100	68.0	39	67.5	28	24	24	7.5	12.0	24.5	11.0	14.5	48	44.0	28.0	10.0	M8	5.5	1.00
45	120	78.8	49	82.5	30	26	26	11.5	14.5	29.5	14.5	19.5	60	52.0	35.5	15.0	M10	5.5	1.84
55	128	86.8	49	82.5	30	30	30	9.5	17.0	29.5	17.0	19.5	70	57.0	40.0	15.0	M10	5.5	2.08
65	138	96.8	49	82.5	30	30	30	9.5	14.5	29.5	14.5	19.5	90	73.5	55.0	20.0	M10	5.5	2.86
20/40	80	59.0	39	58.5	16	20	20	15.5	5.0	31.0	5.0	4.5	27	23.5	14.0	4.5	M4	5.5	0.39
25/70	120	94.0	35	56.5	22	50	20	5.0	9.0	30.0	7.0	17.5	35	32.5	20.0	8.0	M6	5.5	0.68
35/90	156	124.0	42	70.5	28	60	20	9.5	14.0	36.5	11.5	18.0	50	45.5	30.0	10.0	M10	5.5	0.89

<sup>1)</sup> For ball runner block .H. (...high...) Spacer plate necessary

## Pneumatic clamping units LCP



#### Circuit type<sup>1)</sup> for standard air port

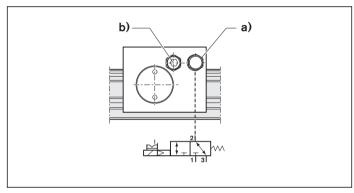

a) Air port b) Air filter Nominal width: Sizes 15 - 20: min. 4 mm Sizes 25 - 65: min. 6 mm

#### R1619 .42 74

#### Note

Can be used on all SNS ball guide rails.

#### Clamps with compression

- Maximum pneumatic operating pressure: 8 bar
- Operating temperature range t: 0 60 °C


#### Instruction for mounting

- Make sure the connection structure is rigid.
- Use only purified and lubricated air. The prescribed filter mesh size is 25 µm.
- ▶ Observe the mounting instructions prior to start-up.

⚠ Observe the safety instructions on clamping and braking units.

Size	Material number	Holding force	Air consumption (normal liter)
		pneumatic <sup>1)</sup>	Air port
		(N)	(dm³/stroke)
25	R1619 242 74	850	0.015

<sup>1)</sup> Holding force at 6 bar. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).

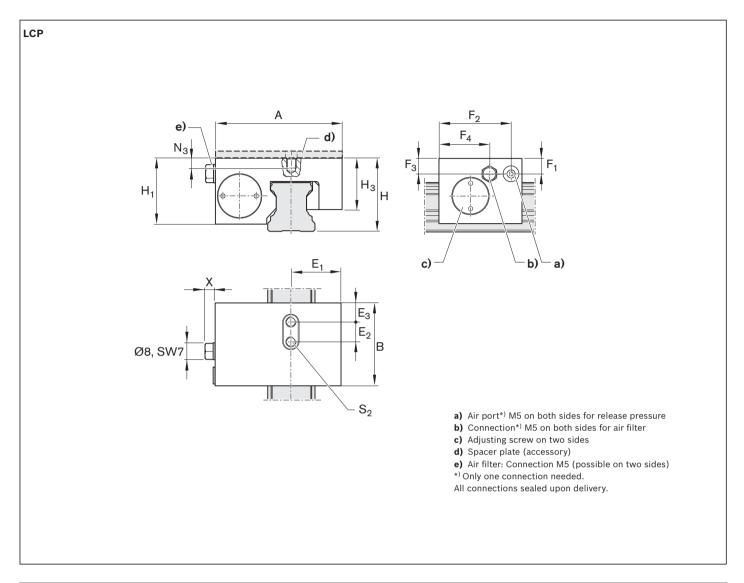


Size	Dimensio	Dimensions (mm)													Mass	
	Α	В	$E_1$	$\mathbf{E_2}$	$E_3$	$F_1$	$F_2$	$F_3$	$F_4$	Н	$H_1^{1)}$	$H_3$	$N_3$	$S_2$	Х	(kg)
25	61.4	41	23.9	9.5	9.75	6.5	36.0	6.5	24.5	36.0	32.5	24.55	7.7	M5	6.5	0.27

<sup>1)</sup> For ball runner block .H. (...high...) Spacer plate necessary.

### Pneumatic clamping units LCPS




## Circuit type<sup>1)</sup> for standard air port



a) Air port
 b) Air filter
 Nominal width:
 Sizes 15 - 20: min. 4 mm
 Sizes 25 - 65: min. 6 mm

## Circuit type<sup>2)</sup> for air-plus port



a) Air port b) Air-plus port Nominal width: Sizes 15 – 20: min. 4 mm Sizes 25 – 65: min. 6 mm

#### R1619 .40 70

#### Note

Can be used on all SNS ball guide rails.

#### Clamps without pressurization (spring energy)

- ► Release pressure min.: 5.5 bar
- ► Maximum pneumatic operating pressure 8 bar
- ► Operating temperature range t: 0 60 °C


#### Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- Use only purified and lubricated air. The prescribed filter mesh size is 25 μm.
- Observe the mounting instructions prior to start-up.

⚠ Observe the safety instructions on clamping and braking units.

Size	Material number	Holding force		Air consumption (normal liter)					
		Spring energy <sup>1)</sup>	with air-plus port <sup>2)</sup>	Air port	Air-plus port				
		(N)	(N)	(dm³/stroke)	(dm³/stroke)				
25	R1619 240 70	650	1 050	0.015	0.082				

- 1) Holding force achieved by spring energy. The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).
- 2) Increased holding force by additional air admission at air-plus port with 6.0 bar. Switching via 5/2 or 5/3-way directional control valve.

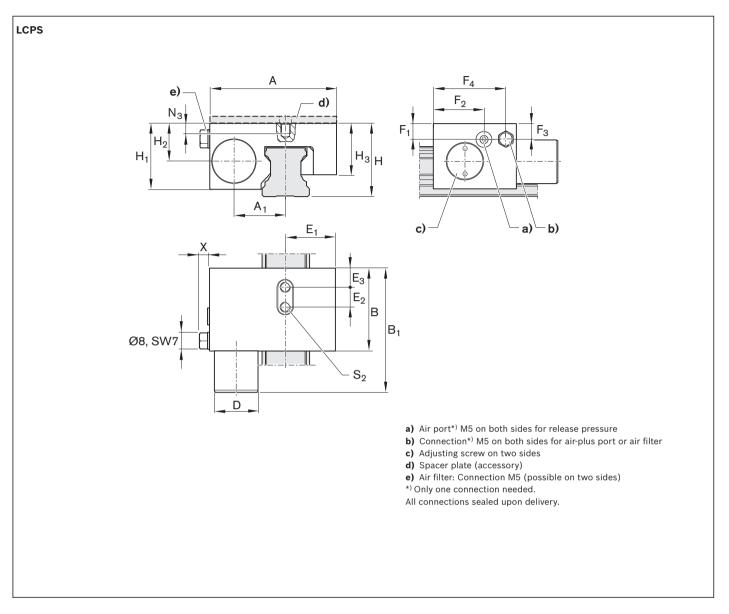

Size	Dimer	nsions (mm)											Mass							
	A	$A_1$	В	$B_{1max}$	D	E <sub>1</sub>	$\mathbf{E_2}$	$E_3$	$F_1$	$F_2$	$F_3$	$F_4$	Н	$H_{1}^{1)}$	$H_2$	$H_3$	$N_3$	$S_2$	Х	(kg)
25	61.4	24.5	41	62.5	22	23.9	9.5	9.75	6.5	24.5	6.5	36.0	36	32.5	20.0	24.55	7.7	M5	6.5	0.35

1) For ball runner block .H. (...high...) Spacer plate necessary.

### Manual clamping units, product description

#### Areas of application

- ► Table crossbars and carriage
- ▶ Width adjustment
- ► Stops
- Positioning on optical devices and measuring tables

#### **Characteristic features**

- ▶ Simple and safe design in compact format
- Manually operated Clamping Unit without auxiliary power

### Special features of HK:

▶ 500,000 clamping cycles (B10d value)

#### **Further highlights**

- ► Freely adjustable hand lever
- ► Symmetrical force application on ball guide rail via floating contact profiles
- ► Precise positioning
- ► Holding forces up to 2,000 N

#### Spacer plate

Suitable for mounting with high ball runner block SNH R1621 and SLH R1624.

⚠ Observe the safety instructions on clamping and braking units.

#### Model overview of accessories for manual clamping units, spacer plate

#### HK



#### HK




Spacer plate




#### Clamps with manual compression

The clamping profiles are pressed to the web surfaces of the ball guide rail by the hand lever.

#### **Compression via hand lever**



#### Hand lever disengaged



## Manual clamping units HK



Size	Material number	Holding force <sup>1)</sup>	Tightening torque
		(N)	(Nm)
15	R1619 142 82	1 200	4
20	R1619 842 82	1 200	5
25	R1619 242 82	1 200	7
30	R1619 742 82	2 000	15
35	R1619 342 82	2 000	15
45	R1619 442 82	2 000	15
55	R1619 542 82	2 000	22
65	R1619 642 82	2 000	22

#### R1619 .42 82

#### Note


Can be used on all SNS ball guide rails.

#### **Manual Clamping Unit**

► Operating temperature range t: 0 - 70°C

#### Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to start-up.
- ⚠ Observe the safety instructions on clamping and braking units.

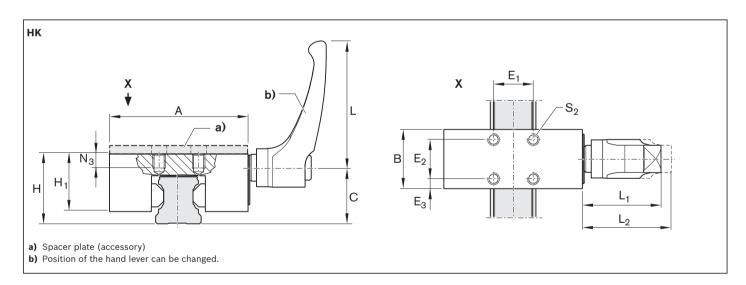

Size	Dimensio	ns (mm)												Mass
	A	В	С	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	Н	H <sub>1</sub> <sup>3)</sup>	L	L <sub>1</sub>	$L_2^{(2)}$	$N_3$	$S_2$	(kg)
15	47	25	19.0	17	17	4.0	24	19	44	30.0	33.0	5	M4	0.16
20	60	24	24.5	15	15	4.5	30	23	44	30.0	33.0	6	M5	0.23
25	70	30	29.3	20	20	5.0	36	29	64	38.5	41.5	7	M6	0.43
30	90	39	34.0	22	22	8.5	42	33	78	46.5	50.5	8	M6	0.82
35	100	39	38.0	24	24	7.5	48	41	78	46.5	50.5	10	M8	1.08
45	120	44	47.0	26	26	9.0	60	48	78	46.5	50.5	14	M10	1.64
55	140	49	56.5	30	30	9.5	70	51	95	56.5	61.5	14	M14	1.71
65	160	64	69.5	35	35	14.5	90	66	95	56.5	61.5	20	M16	2.84

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).
- 2) Hand lever disengaged
- 3) For ball runner block .H. (...high...) Spacer plate necessary

## Manual clamping units HK



Size	Material number	Holding force <sup>1)</sup> (N)	Tightening torque (Nm)
25/70	R1619 242 83	1 200	7
35/90	R1619 342 83	2 000	15

#### R1619 .42 83

#### Note

Can be used on all BNS ball guide rails.


#### **Manual Clamping Unit**

► Operating temperature range t: 0 - 70°C

#### Instruction for mounting

- ▶ Make sure the connection structure is rigid.
- ▶ Observe the mounting instructions prior to start-up.

⚠ Observe the safety instructions on clamping and braking units.

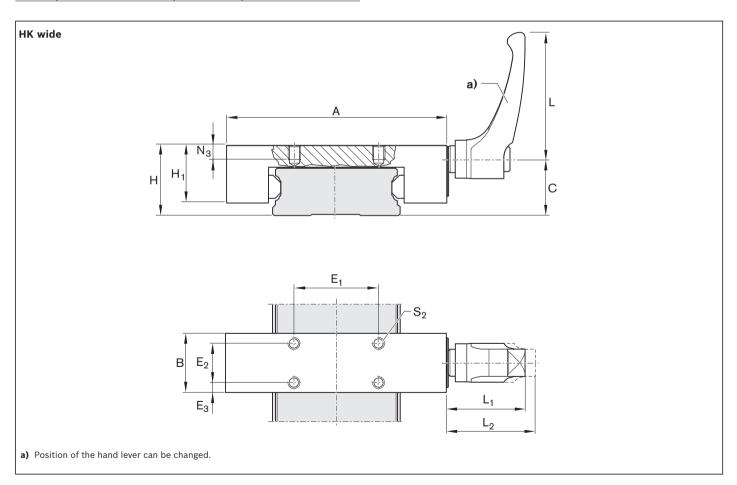

Size	Dimensions (mm)												Mass	
	Α	В	С	$E_1$	$E_2$	E <sub>3</sub>	Н	H <sub>1</sub>	L	$L_1$	$L_2^{(2)}$	$N_3$	$S_2$	(kg)
25/70	120	39	28.2	50	25	7.0	35	30	64	38.5	41.5	11	M6	0.77
35/90	145	39	38.0	60	20	9.5	50	39	78	46.5	50.5	11	M8	1.38

- 1) The inspection is done in a mounted state with a lubricated layer (ISO-VG 68).
- 2) Hand lever disengaged


## Spacer plate



### for clamping units MK, MKS and HK

#### Note

Suitable for mounting with high ball runner block SNH R1621 and SLH R1624.

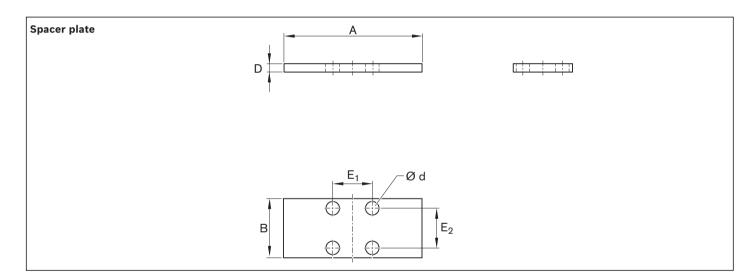

#### R1619 .40 65

# Suitable for Clamping Units:

- ► R1619 .42 60 (MK)
- ► R1619 .40 60 (MKS)

Size	Material number	Dimensions (mm)							
		A	В	D	d	E <sub>1</sub>	E <sub>2</sub>	(kg)	
15	R1619 140 65	55	39	4	4.5	15	15	0.065	
25	R1619 240 65	75	35	4	6.5	20	20	0.078	
30	R1619 740 65	90	39	3	8.5	22	22	0.077	
35	R1619 340 65	100	39	7	8.5	24	24	0.202	
45	R1619 440 65	120	49	10	10.5	26	26	0.434	
55	R1619 540 65	128	49	10	10.5	30	30	0.465	

#### R1619 .42 .5

# Suitable for Clamping Units:

► R1619 .42 82 (HK)

Size	Material number	Dimensions (mm)						
		A	В	D	d	E <sub>1</sub>	E <sub>2</sub>	(kg)
15	R1619 142 85	47	25	4	4.5	17	17	0.035
25	R1619 242 85	70	30	4	6.5	20	20	0.062
30	R1619 742 85	90	39	3	6.5	22	22	0.080
35	R1619 340 65	100	39	7	8.5	24	24	0.202
45	R1619 442 85	120	44	10	10.5	26	26	0.387
55	R1619 542 85	140	49	10	14.5	30	30	0.511

### Safety instructions clamping and braking units

#### **General safety instructions**

A During all work on the clamping units, the respective valid accident prevention regulations, as well as the VDE safety instructions and instruction for mounting are to be observed!

**A** The clamping units do not have any guiding function. A runner block can therefore not be replaced with a clamping unit. The ideal position of the clamping unit lies between two runner blocks. When using several clamping elements, these should be distributed evenly on both guide rails in order to attain maximum rigidity for the overall construction.

A For Hydraulic Clamping and Braking Units, the return pressure in the tank line must be lower than 1.5 bar!

A Consider the response times of the Clamping and Braking Units!

**A** The Clamping Unit is not intended for securing suspended loads!

⚠ Do not remove the cover of the safety clamping unit - spring under tension!

**A** The transport lock may only be removed if:

- The hydraulic port has been pressurized with the operating pressure according to instructions.
- The air port has been pressurized with compressed air to at least 4.5 bar (MBPS) or 5.5 bar (UBPS, MKS) according to instructions.

⚠ The Clamping Unit may only be de-pressurized when the appropriate ball guide rail or transport lock is in position between the contact profiles!

**A** The use of clamping and braking units is not permissible on ball guide rails with integrated measuring systems.

### Additional notes for Clamping and Braking Units

🛦 The clamping and braking units are suitable for usage in safety-critical applications for braking and clamping. The safe function of the total system in which the Clamping and Braking Units are used is primarily defined by the controller for this system. The technical dimensioning of this system and the controller is to be undertaken by the manufacturer of the higher level system, assembly, plant or machine. During this process the safety-related requirements for functional safety are to be observed.

### **Additional notes for Clamping Units**

⚠ The unit may not be used as a Braking Unit! For use only when the axis is at a standstill!

A Pressure may only be applied when the unit is properly mounted on the ball guide rail!

## General instruction for mounting

The following notes relating to mounting apply to all ball rail systems. However, different specifications exist with regard to the parallelism of the ball guide rails and to mounting the ball runner blocks with screws and locating pins. This information is provided separately alongside the descriptions of the individual types of ball rail systems.

📤 In the case of overhead installation (hanging installation) or vertical installation, the ball runner block can release from the ball guide rail due to the balls being lost or broken. Secure the ball runner block from falling! Risk of death! We recommend protection against falling loads!

A Rexroth ball rail systems are high-quality products. Use with extreme care during transport and mounting. The same care must be taken with cover strips. All steel parts are protected with anti-corrosion oil. It is not necessary to remove this oil, provided that the recommended lubricants are used.

#### **Installation examples**

#### Ball guide rails

Each ball guide rail has ground reference surfaces on both sides.

Possibilities for side fixing:

- 1 Reference edges
- 2 Clamping strips
- 3 V-guides

#### Note

- ▶ Ball guide rails without side fixing have to be aligned straight and parallel when mounting, preferably using a straightedge.
- ► For guide values for permissible lateral force without additional lateral retention, see corresponding ball runner blocks and instructions for mounting, page 206.


#### **Ball runner blocks**

Each ball runner block has a ground reference edge on one side (see dimension  $V_1$  in the dimension drawings).


Possibilities for additional fixing:

- 1 Reference edges
- 2 Clamping strips
- 4 Locating pins

#### Mounting with fixing of both ball guide rails and both ball runner blocks

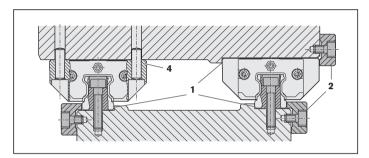

#### Mounting with fixing of one ball guide rail and one ball runner block

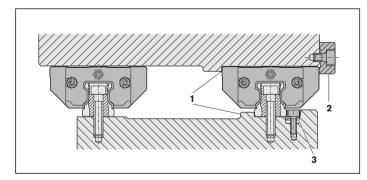

#### **Notes**

- ▶ Before installing the components, clean and degrease all mounting surfaces.
- ▶ Please ask for the "Mounting Instructions for ball rail systems".
- After mounting, it should be possible to move the ball runner block easily.


#### **Calculating threaded connections**

The threaded connections in runner blocks and roller guide rails produce maximum traction forces F<sub>0 z max</sub>, maximum static torsional moments  $M_{0 \times max}$  and maximum static side load  $F_{0 \times max}$ , without stop strips that the linear guide can transfer. The maximum load on a profiled rail system is defined not only by the static load-bearing capacity  $C_0$  in accordance with ISO 14728 Part 2 and the static load moments M<sub>10</sub> from the rolling contact, but also by the threaded connections. As a rule, ball runner blocks are fastened using 4 or 6 screws. Ball guide rails have one or two rows of threaded connections in regular distances, whereby the screws located directly under the runner block are subject to the most stress. If the runner block and rail are fastened with screws in the same strength class, the connection between the rail and the mounting base (O3) is critical to the maximum forces and moments that can be transferred. Calculation of the values in the table for strength class 8.8, 10.9 and 12.9 are taken from DIN 637 (August 2013): Ball bearings - safety regulations for dimensioning and operation of Profiled Rail Systems with recirculating rolling elements. In comparison to the standard, the values determined by Bosch Rexroth include a higher safety factor. Threaded connections are calculated based on the dimensions in the catalog (screw sizes, runner block lengths, clamping lengths, screw-in depths, bore diameters, rail separations of the rail bore holes, rail width, etc.). Deviant screw connections are to be recalculated according to VDI 2230. The maximum static traction force and maximum static torsional moment of a ball guide rail system are the product of the sum of the axial forces on the rail screws within the flow of forces. However, for the maximum static side load, the sum of the clamping forces on the rail screws within the flow of forces is crucial.

#### Input values for calculation:

 $\begin{array}{lll} - & \text{Friction coefficient in the thread} & \mu_G & = 0.125 \\ - & \text{Friction coefficient at the head surface} & \mu_K & = 0.125 \\ - & \text{Friction coefficient in the joint} & \mu_T & = 0.2 \\ - & \text{Tightening torque for torque wrench} & \alpha_A & = 1.5 \end{array}$ 

The applied friction coefficients and the tightening torque are common values in practice. Depending on the customer application and mounting procedure, the actual input parameters may deviate considerably from the assumptions. This must be checked after each dimensioning and tightening connections must be recalculated with actual values according to VDI 2230 as necessary. Even slight deviations from the assumptions in the Bosch Rexroth calculations lead to variations in tightening torque and maximum transferable static tension forces, torsional moments and lateral forces.

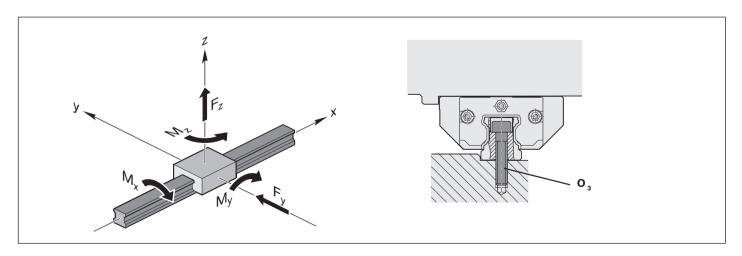

#### **Tightening torques for profiled rail systems**

The tightening torques for screw strength classes 8.8, 10.9 and 12.9 were calculated for the dimensions of a Rexroth ball rail system. Detailed descriptions of the possible tightening connections O1 to O6 can be found on the following pages.

#### Runner block

Size	FKS, FNS,	, FLS, FKN, I	FNN, BNS, C	NS					SKS, SNS	, SLS, SKN,	SNN,SNH,SL	.H
	for mount	ing from ab	ove		for mount	ing from be	low		for mount	ing from ab	ove	
	04		,		01&02				05	,		
		8.8	10.9	12.9		8.8	10.9	12.9		8.8	10.9	12.9
15	M5	6.3	9.2	11	M4	3.3	4.8	4.9	M4	3.1	4.6	5.4
20	M6	11	16	18	M5	6.5	9.5	11	M5	6.3	9.2	11
25	M8	26	38	44	M6	8.4	8.4	8.4	M6	11	16	18
30	M10	51	74	87	M8	27	28	28	M8	26	38	44
35	M10	51	74	87	M8	27	28	28	M8	26	38	44
45	M12	87	130	130	M10	52	66	66	M10	51	74	87
55	M14	140	200	220	M12	81	81	81	M12	87	130	130
65	M16	210	310	340	M14	140	150	150	M14	210	310	340

#### Guide rail

Size	for mount	ing from abo	ove		for mount	ing from bel	ow	
	03				06			
		8.8	10.9	12.9		8.8	10.9	12.9
15	M4	3.1	4.6	5.4	M5	6.3	9.2	11
20	M5	6.4	9.4	11	M6	11	16	18
25	M6	11	16	18	M6	11	16	18
30	M8	26	38	44	M8	26	38	44
35	M8	26	38	44	M8	26	38	44
45	M12	88	110	110	M12	87	130	140
55	M14	140	190	190	M14	140	200	230
65	M16	220	300	300	M16	210	310	360


#### Maximum static traction forces and torsional moments on profiled rail systems

The threaded connections in a profiled rail system can only transfer a limited traction force  $F_z$  or a limited torsional moment Mx. If these limit values are exceeded, the guideway will lift off of the adjacent structure. The permissible values for a guideway are the product of the maximum possible axial force on a threaded connection in the Guide Rail. Exceeding the indicated maximum static load is not permissible.

The table values are guidelines for the permissible static traction force  $F_{0z max}$  and torsional moments  $M_{0x max}$  that are only applicable when the following conditions are met:

- Screw sizes, screw quantity and connecting dimensions as listed in the catalog
- Same mounting screw strength class for blocks and rails
- Steel adjacent structure
- Traction force F<sub>z</sub> or torsional moment M<sub>x</sub> are static
- Traction force F<sub>z</sub> and torsional moment M<sub>x</sub> do not occur simultaneously
- No interaction with side load  $F_v$  or longitudinal moment  $M_v/M_z$

If these conditions are not met, recalculate the threaded connection in accordance with VDI 2230. If the applied loads are just below the limit values, Bosch Rexroth also recommends checking the threaded connections.

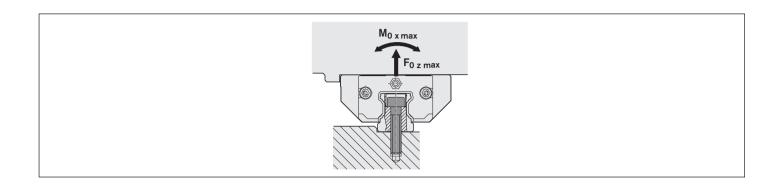

#### Tensile forces

Size	Maximum station	c tensile forces	F <sub>0 z max</sub> in [N]						
	Short			Normal length	l		Long		
	хКх			xNx			xLx		
	8.8	10.9	12.9	8.8	10.9	12.9	8.8	10.9	12.9
15	2410	3900	4700	2410	3900	4700	2410	3900	4700
20	4220	6690	8010	4220	6690	8010	4600	7300	8730
25	5520	8740	10500	5520	8740	10500	7340	11600	13900
30	10100	16000	19200	10100	16000	19200	11300	17900	21500
35	10500	16400	19600	10500	16400	19600	13900	21700	25900
45	25400	34900	34900	25400	34900	34900	32300	44300	44300
55	36500	53700	53700	36500	53700	53700	47400	69800	69800
65	50600	76400	77500	50600	76400	77500	65800	99400	101000

#### **Torsional moments**


Size	Maximum static torsional moments M <sub>0 x max</sub> in [Nm]													
	Short			Normal length	ı		Long							
	хКх			xNx			xLx							
	8.8	10.9	12.9	8.8	10.9	12.9	8.8	10.9	12.9					
15	16	26	31	16	26	31	16	26	31					
20	38	60	72	38	60	72	41	66	79					
25	58	92	110	58	92	110	77	120	150					
30	130	210	250	130	210	250	150	230	280					
35	170	260	310	170	260	310	220	350	410					
45	550	750	750	550	750	750	690	950	950					
55	910	1340	1340	910	1340	1340	1190	1740	1740					
65	1490	2250	2290	1490	2250	2290	1940	2930	2970					

### Maximum static side load without stop strips

For a secure structure, Rexroth recommends using stop strips on the Runner Block and Guide Rail. If stop strips are not used on the runner block or the rail, then if a load is applied in the transverse direction the guideway may slip. The clamping force on the threaded connection is too low as soon as the side loads in the table are exceeded. The table values are guidelines for the permissible static side loads  $F_{0 \text{ y max}}$  that are only applicable when the following conditions are met:

- Screw sizes, screw quantity and connecting dimensions as listed in the catalog
- Same mounting screw strength class for blocks and rails
- Steel adjacent structure
- No interaction with traction force  $F_z$ , torsional moments  $M_x$  or longitudinal moments  $M_v/M_z$

If these conditions are not met, recalculate the threaded connection in accordance with VDI 2230. If the applied loads are just below the limit values, Bosch Rexroth also recommends checking the threaded connections.

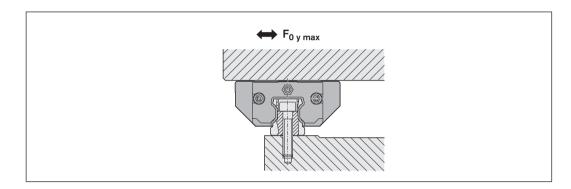

#### **Lateral forces**

Size	Maximum station	um static lateral forces F <sub>0 y max</sub> in [N]							
	Short			Normal length	ı		Long		
	хКх			xNx			xLx		
	8.8	10.9	12.9	8.8	10.9	12.9	8.8	10.9	12.9
15	370	600	720	370	600	720	370	600	720
20	640	1010	1210	640	1010	1210	690	1100	1320
25	900	1430	1710	900	1430	1710	1200	1900	2270
30	1630	2600	3110	1630	2600	3110	1830	2910	3480
35	1710	2670	3190	1710	2670	3190	2260	3530	4210
45	4110	5330	5330	4110	5330	5330	5220	6770	6770
55	5920	8220	8220	5920	8220	8220	7700	10700	10700
65	8210	11800	11800	8210	11800	11800	10700	15300	15300

## Reference edges, corner radii

#### **Combination examples**


The combinations shown here are examples.
Basically, any ball runner block may be combined with any of the ball guide rail types offered.

#### **Mounting screws**

Always make sure the screws are secure where there are high screw loads!

For more information on this topic, see the "General mounting instructions" section.

#### Ball guide rail with normal and long ball runner blocks

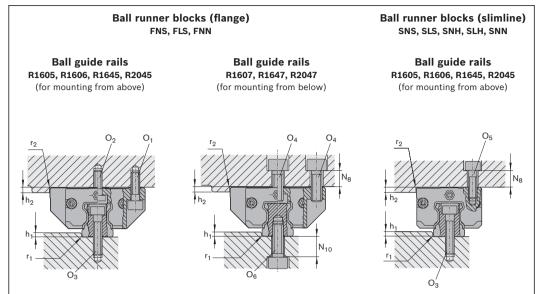

Size	Dimensions (n	nm)					
	h <sub>1 min</sub>	h <sub>1 max</sub> 1)	$h_2$	N <sub>8</sub>	$N_{10}$	r <sub>1 max</sub>	r <sub>2 max</sub>
15	2.5	3.5	4	6	7.0	0.4	0.6
20	2.5	4.0	5	9	9.5	0.6	0.6
				10 <sup>3)</sup>	_		
25	3.0	5.0	5	10	12.0	0.8	0.8
				11 <sup>3)</sup>	_		
30	3.0	5.0	6	10	9.0	0.8	0.8
35	3.5	6.0	6	13	13	8.0	0.8
45	4.5	8.0	8	14	13	0.8	0.8
55	7.0	10.0	10	20	23	1.2	1.0
65	7.0	10.0	14	22	26	1.2	1.0

1) When using clamping and braking units, please take account of the values H1.

Size	Screw sizes					
	Ball runner bloc	ks		Ball guide rail		
	0,	O <sub>2</sub> <sup>2)</sup>	O <sub>4</sub> <sup>1) 2)</sup>	0,	O <sub>3</sub>	06
	ISO 4762	DIN 6912	ISO 4762	ISO 4762	ISO 4762	ISO 4762
	4 pieces	2 pieces	6 pieces	4 pieces		
15	M4x12	M4x10	M5x12	M4x12	M4x20	M5x12
20	M5x16	M5x12	M6x16	M5x16	M5x25	M6x16
25	M6x20	M6x16	M8x20	M6x18	M6x30	M6x20
30	M8x25	M8x16	M10x20	M8x20	M8x30	M8x20
35	M8x25	M8x20	M10x25	M8x25	M8x35	M8x25
45	M10x30	M10x25	M12x30	M10x30	M12x45	M12x30
55	M12x40	M12x30	M14x40	M12x35	M14x50	M14x40
65	M14x45	M14x35	M16x45	M16x40	M16x60	M16x45

- 1) For fixing the ball runner block from above with only 4  $O_4$  screws: Permissible side load 1/3 lower, and lower rigidity
- 2) When fastening the ball runner block with 6 screws: Tighten centerline screws to tightening torque  $M_{\Delta}$  of strength class 8.8
- 3) Ball runner block SNN

#### **Locating pins**

A If the guideline values for the permissible lateral force are exceeded (see the corresponding ball runner blocks), you must fix them additionally by pinning.


For the recommended dimensions for pin holes, refer to the dimension drawing and the dimensions.

#### Possible pin types

- Tapered pin (hardened)
- Straight pin (DIN ISO 8734)

#### Note

- At the recommended positions for pin holes, there may be pre-drilled holes in the middle of the ball runner block due to production-related issues ( $\emptyset$  <  $S_{10}$ ). They are suitable for drilling out.
- ▶ If is necessary to carry out pinning at a different position (e.g. the middle lube connection), dimension E2 must not be exceeded in the longitudinal direction (for dimension E2, refer to the dimension tables of the corresponding ball runner blocks). Comply with dimensions  $E_1$  and  $E_4$ !
- Do not finish the pin holes until after installation.
- Please request the "Mounting instructions for ball rail systems."

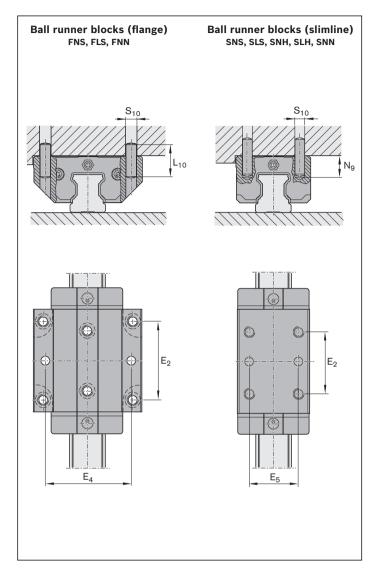

Size	Dimensions	Dimensions (mm)					
	E <sub>4</sub>	<b>E</b> <sub>5</sub>	L <sub>10</sub> 1)	N <sub>9 max</sub>	S <sub>10</sub> 1)		
15	38	26	18	6.0	4		
20	53 49 <sup>2)</sup>	32	24	7.5 6.5 <sup>2)</sup>	5		
25	55 60 <sup>2)</sup>	35	32	9.0 7.0 <sup>2)</sup>	6		
30	70	40	36	12.0	8		
35	80	50	40	13.0	8		
45	98	60	50	18.0	10		
55	114	75	60	19.0	12		
65	140	76	60	22.0	14		

- 1) Tapered pin (hardened) or straight pin (DIN ISO 8734)
- 2) Ball runner blocks FNN and SNN

## Reference edges, corner radii

#### **Combination examples**

The combinations shown here are examples.
Basically, any ball runner block may be combined with any of the ball guide rail types offered.


The tightening of the ball runner blocks with 2 screws is completely sufficient up to the maximum load. (For maximum load capacity and load moments, see corresponding ball runner blocks).

#### **Mounting screws**

Always make sure the screws are secure where there are high screw loads!

For more information on this topic, see the "General mounting instructions" section.

#### Ball guide rail with ball runner block, short and super.

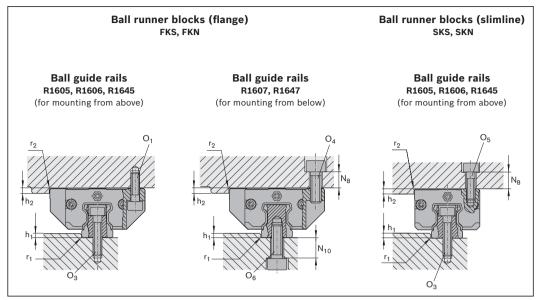

Size	Dimensions (n	nm)					
	h <sub>1 min</sub>	h <sub>1 max</sub> 1)	$h_2$	N <sub>8</sub>	$N_{10}$	r <sub>1 max</sub>	r <sub>2 max</sub>
15	2.5	3.5	4	6	7.0	0.4	0.6
20	2.5	4.0	5	9	9.5	0.6	0.6
				10 <sup>2)</sup>	_		
25	3.0	5.0	5	10	12.0	0.8	0.8
				11 <sup>2)</sup>	_		
30	3.0	5.0	6	10	9.0	0.8	0.8
35	3.5	6.0	6	13	13.0	0.8	0.8

- 1) When using clamping and braking units, please take account of the values H1.
- 2) Ball runner block SKN

Size	Screw sizes	'	'		
	Ball runner blocks	Ball runner blocks			
	O <sub>1</sub> ISO 4762 2 pieces	O <sub>4</sub> ISO 4762 2 pieces	O <sub>5</sub> ISO 4762 2 pieces	0 <sub>3</sub> ISO 4762	0 <sub>6</sub> ISO 4762
15	M4x12	M5x12	M4x12	M4x20	M5x12
20	M5x16	M6x16	M5x16	M5x25	M6x16
25	M6x20	M8x20	M6x18	M6x30	M6x20
30	M8x25	M10x20	M8x20	M8x30	M8x20
35	M8x25	M10x25	M8x25	M8x35	M8x25

#### **Locating pins**

A If the guideline values for the permissible lateral force are exceeded (see the corresponding ball runner blocks), you must fix them additionally by pinning.


For the recommended dimensions for pin holes, refer to the dimension drawing and the dimensions.

#### Possible pin types

- ► Tapered pin (hardened)
- ► Straight pin (DIN ISO 8734)

#### Note

- ▶ At the recommended positions for pin holes, there may be pre-drilled holes in the middle of the ball runner block due to production-related issues (Ø < S<sub>10</sub>). They are suitable for drilling out. Comply with dimensions E<sub>4</sub> and E<sub>5</sub>!
- ► Do not complete the pin holes until after mounting. Please request the "Mounting instructions for ball rail systems."

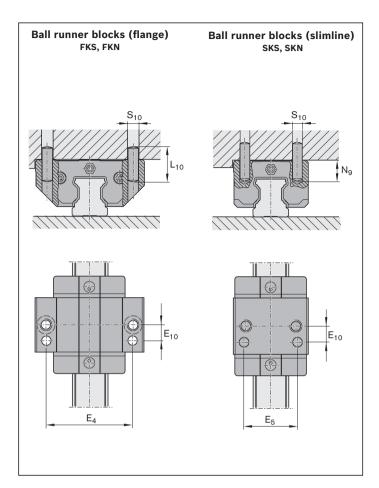


Size	Dimensi	Dimensions (mm)					
	E <sub>4</sub>	<b>E</b> <sub>5</sub>	E <sub>10</sub>	$L_{10}^{1)}$	N <sub>9 max</sub>	S <sub>10</sub> 1)	
15	38	26	9	18	3.0	4	
20	53 49 <sup>2)</sup>	32	10	24	3.5 2.0 <sup>2)</sup>	5	
25	55 60 <sup>2)</sup>	35	11	32	7.0 5.0 <sup>2)</sup>	6	
30	70	40	14	36	10.0	8	
35	80	50	15	40	12.0	8	

- 1) Tapered pin (hardened) or straight pin (DIN ISO 8734)
- 2) Ball runner blocks FKN and SKN

Permissible misalignments for super ball runner blocks

On the ball guide rail and on the ball runner block

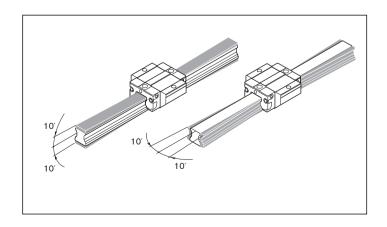

# Reference edges, corner radii, screw sizes

#### **Combination examples**


The combinations shown here are examples.
Basically, any ball runner block may be combined with any of the ball guide rail types offered.


#### **Mounting screws**

Always make sure the screws are secure where there are high screw loads!

For more information on this topic, see the "General mounting instructions" section.

#### Ball guide rail with ball runner block, wide

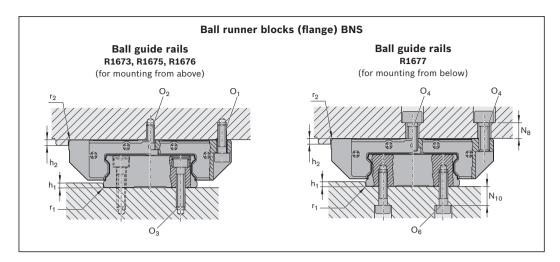

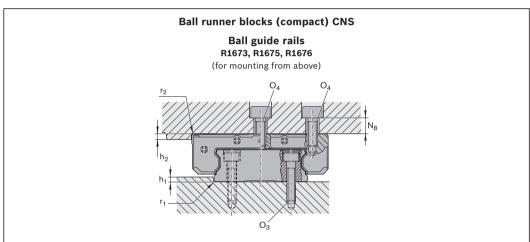

Size	Dimensions (mm)							
	h <sub>1 min</sub>	h <sub>1 max</sub> 1)	$h_2$	N <sub>8</sub>	N <sub>8</sub> <sup>2)</sup>	$N_{10}$	$\mathbf{r_{1max}}$	r <sub>2 max</sub>
20/40	2.0	2.5	4	9.5	11	5.5	0.5	0.5
25/70	3.0	4.5	5	10.0	13	9.0	0.8	0.8
35/90	3.5	6.0	6	13.0	-	11.0	0.8	0.8

Size	Screw sizes				
	Ball runner blocks		В	all guide rail	
	O <sub>1</sub>	O <sub>2</sub> 3)	O <sub>4</sub> 3)	O <sub>3</sub>	O <sub>6</sub>
	ISO 4762	<b>DIN 6912</b>	ISO 4762	ISO 4762	ISO 4762
	4 pieces	2 pieces	6 pieces		
20/40	M5x16	_	M6x16	M4x20	M5x12
25/70	M6x20	M6x16	M8x20	M6x30	M6x20
35/90	M8x25	M8x20	M10x25	M8x35	M8x25

- 1) When using clamping and braking units, please take account of the values H1.
- 2) Ball runner blocks CNS
- 3) When fastening the ball runner block with 6 screws: Tighten centerline screws to tightening torque M<sub>A</sub> of strength class 8.8. As a matter of principle, centerline fixing screws should be used as well, otherwise there is a risk of a decreasing preload.


#### **Locating pins**

A If the guideline values for the permissible lateral force are exceeded (see the corresponding ball runner blocks), you must fix them additionally by pinning.

For the recommended dimensions for pin holes, refer to the dimension drawing and the dimensions.

#### Possible pin types

- Tapered pin (hardened)
- Straight pin (DIN ISO 8734)

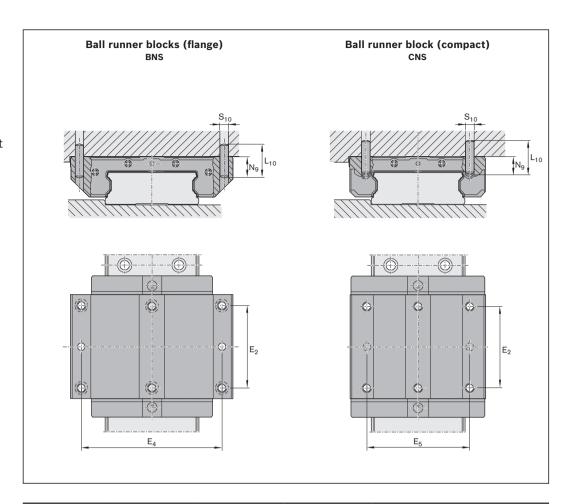

Size	Dimensions (mm)		,		
	E <sub>4</sub>	E <sub>5</sub>	L <sub>10</sub> 1)	N <sub>9 max</sub>	S <sub>10</sub> 1)
20/40	70	46	24	7	5
25/70	107	76	32	8	6
35/90	144	-	32	8	8

1) Tapered pin (hardened) or straight pin (DIN ISO 8734)

#### Note


- At the recommended positions for pin holes, there may be pre-drilled holes in the middle of the ball runner block due to production-related issues ( $\emptyset$  <  $S_{10}$ ). They are suitable for drilling out.
- ▶ If is necessary to carry out pinning at a different position (e.g. the middle lube connection), dimension E<sub>2</sub> must not be exceeded in the longitudinal direction (for dimension E2, refer to the dimension tables of the corresponding ball runner blocks). Comply with dimensions  $E_4$  and  $E_5$ !
- Do not complete the pin holes until after mounting.
- Please request the "Mounting instructions for ball rail systems."

(mm)

### Installation tolerances

#### **Vertical offset**

If you comply with the permissible vertical offset  $\mathbf{S}_1$  and  $\mathbf{S}_2$  , the effect on the service life is, in general, negligible.

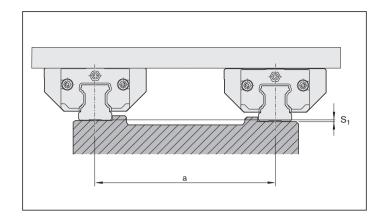

#### Permissible vertical offset in transverse direction S<sub>1</sub>

The tolerance for dimension H is to be deducted from the permissible vertical offset S<sub>1</sub> of the ball guide rails according to the table containing the accuracy classes in the "General product description" chapter.

If S<sub>1</sub><0 applies, in the event of a combination of accuracy classes, select other tolerances in the "General product description" chapter.

Ball runner blocks	Calculation factor Y for preload class						
	C0 C1 C2						
made of steel	4.3 · 10 <sup>-4</sup>	2.8 · 10 <sup>-4</sup>	1.7 · 10 <sup>-4</sup>	1.2 · 10 <sup>-4</sup>			
Short made of steel	5.2 · 10 <sup>-4</sup>	3.4 · 10 <sup>-4</sup>	_	-			
Super ball runner	8.0 · 10 <sup>-4</sup>	6.0 · 10 <sup>-4</sup>	_	_			
blocks							
made of aluminum	7.0 · 10 <sup>-4</sup>	$5.0 \cdot 10^{-4}$	_	_			

$$S_1 = a \cdot Y$$

= Permissible vertical offset of the ball guide rails

(mm) = Centerline-to-centerline distance between the

ball guide rails

= Calculation factor transverse direction (-)

#### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload


C3 = High preload

### Installation tolerances

#### Permissible vertical offset in longitudinal direction S<sub>2</sub>

You must deduct from the permissible vertical offset  $\mathrm{S}_2$  of the ball runner blocks the "Max. difference of dimension  $\Delta H$  on one rail" tolerance according to the table containing the accuracy classes in the "General product description" chapter.

If  $\rm S_2\mbox{<}0$  applies, in the event of a combination of accuracy classes select other tolerances in the "General product description" chapter.

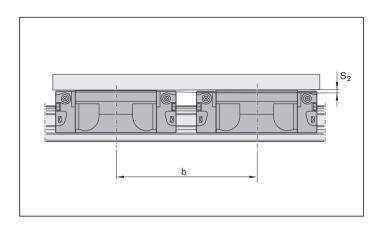

Ball runner blocks	Calculation factor X for ball runner block length						
	Short Normal Long						
made of steel	6.0 · 10 · 5	4.3 · 10 · 5	3.0 · 10 · 5				
made of aluminum	_	6.0 · 10 · 5	_				

$$S_2 = b \cdot X$$

#### Key


S<sub>2</sub> = Permissible vertical offset of the ball runner blocks (mm)

b = Centerline-to-centerline distance between the

ball runner blocks (mm)
K = Calculation factor longitudinal direction (-)

Permissible nonlinearity in longitudinal direction for two consecutive super ball runner blocks

The ball runner blocks can automatically compensate for nonlinearities of 10' in the longitudinal direction.

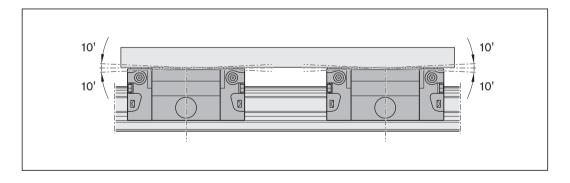

### **General notes**

The following notes on mounting apply to all ball rail systems.

Rexroth ball rail systems are high-quality products.

Use with extreme care during transport and mounting. The same care must be taken with cover strips.

All steel parts are protected with anti-corrosion oil.

It is not necessary to remove this oil, provided that the recommended lubricants are used.

▲ In the case of overhead installation (hanging installation), the ball runner block can release from the guide rail due to the balls being lost or broken. Secure the ball runner block from falling!


### Parallelism offset of the installed rails

# Values measured on the ball guide rails and the ball runner blocks

The values for the parallelism offset P1 apply to the entire standard range of ball runner blocks.

The parallelism offset  $\mathbf{P}_1$  causes a slight rise in the preload.

As long as the values specified in the table are met, the effect of parallelism offsets on the service life can generally be neglected.

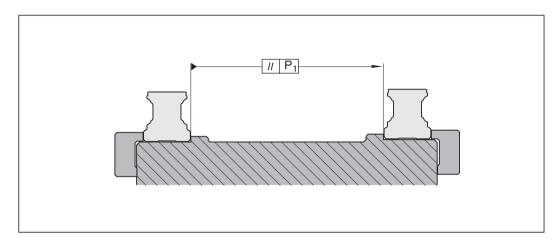

Ball runner blocks	Size	Parallelism offset P <sub>1</sub> (mm) for preload class				
		CO	C1	C2	C3	
Ball runner block made of	15	0.015	0.009	0.005	0.004	
steel with precision	20	0.018	0.011	0.006	0.004	
installation <sup>1)</sup>	25	0.019	0.012	0.007	0.005	
	30	0.021	0.014	0.009	0.006	
	35	0.023	0.015	0.010	0.007	
	45	0.028	0.019	0.012	0.009	
	55	0.035	0.025	0.016	0.011	
	65	0.048	0.035	0.022	0.016	
Ball runner block, short,	15	0.018	0.011	_	_	
made of steel	20	0.022	0.013	_	_	
	25	0.023	0.014	_	_	
	30	0.025	0.017	_	_	
	35	0.028	0.018	_	_	
Super ball runner blocks	15	0.025	0.017	_	_	
	20	0.029	0.021	_	_	
	25	0.032	0.023	_	_	
	30	0.035	0.026	_	_	
	35	0.040	0.030	_	_	
Aluminum ball runner block	15	0.021	0.014	_	_	
	25	0.026	0.017	_	_	
	30	0.029	0.019	_	_	
	35	0.035	0.022	_	_	

### **Preload classes**

C0 = Without preload (clearance)

C1 = Moderate preload

C2 = Average preload


C3 = High preload

The precision installation unit is a rigid, high-precision surrounding structure.
 With standard installation, the surrounding structure is of flexible design and it is possible to work with double the tolerance values of the parallelism offset.

### Composite ball guide rails

### Notes on ball guide rails

- ► Matching partial sections of a composite ball guide rail are identified as such by a label on the packaging. All partial sections of the same rail have the same serial rail number.
- ▶ The numbering is marked on the top of the ball guide rail.

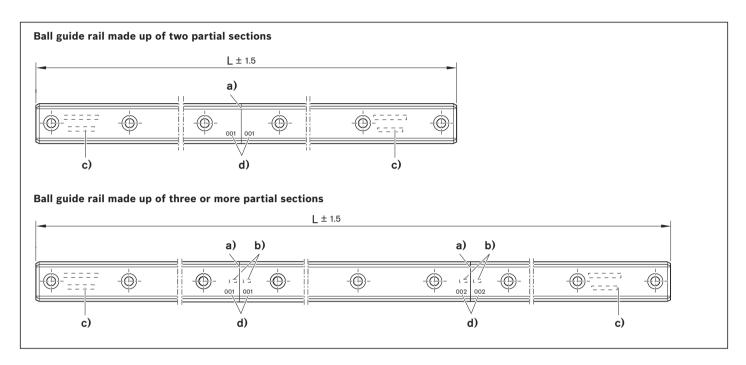

L = rail length

 $n_B = number of holes$ 

(mm) (-)

- a) Joint
- b) Rail number
- c) Full rail identification on first and last sections
- d) Joint identification number

### Note on cover strip

- ▶ For composite ball guide rails, a one-piece cover strip to cover the total length L is supplied separately.
- ► Secure the cover strip!

### Note on adjacent structures

Permissible mounting hole tolerances for adjacent structures

Size	Hole position tolerance (mm)
15 - 35	Ø 0.2
45 - 65	Ø 0.3

For composite ball guide rails, the actual tolerances of the individual sections may sum up. In such case, the fastening bore holes in the connecting structure may lie outside of the tolerances and a rework of the connecting structure may be required.

### Notes on Jubrication

- ▶ All specifications on lubrication are based on experimental values and field experience are recommendations by Bosch Rexroth.
- ▶ The service life of the ball rail system crucially depends on the lubrication. For this purpose, the documentation, especially the chapter on lubrication, must be read and understood completely.
- ▶ The operator is responsible for the selection and supply of the ball rail system with sufficient and suitable lubricant. These notes do not exempt the operator from the individual examination of the conformity and suitability of the lubricant for its application.
- ► For recommended lubricants, see the chapter "Notes on Dynalub".

🛕 To safeguard the supply of lubricant the lube fittings from the chapter "Accessories" must be used. When using other lube fittings it must be ensured that they are identical to Rexroth lube fittings.

Alf using a progressive lubrication system, with grease lubrication, please pay attention to the minimum dosing amount for relubrication stated in table 9.

**A** We recommend carrying out initial lubrication separately using a grease gun before connecting to the central lubrication system.

If using a central lubrication system, you must make sure that all the pipes and elements are filled with lubricant and do not contain any air pockets until they are connected to the consumer (ball runner block).

The number of pulses results from the partial amounts and the piston distributor size.

- With fluid grease lubrication according to table 9
- ▶ With oil lubrication according to table 14

**A** The seals on the ball runner block must be oiled or greased with the respective lubricant before mounting.

📤 If using different lubricants than the ones specified, relubrication intervals may be shorter and performance may decrease with short stroke and load ratio; in addition, chemical interactions can take place between the plastics, lubricants and preservative agents. Single-line central lubrication systems also need to be able to pump these lubricants.

**A**Lubricant reservoirs should contain an agitator to ensure the lubricant can flow (avoids hardening in the reservoir).

 $\triangle$  Do not use lubricants with solid particles (e.g. graphite or MoS<sub>2</sub>).

**A** With basic lubrication at the factory, both grease and oil lubrication is possible. In the case of relubrication, it is not possible to change from grease to oil lubrication, as the lubrication channels are already filled with grease and are therefore impermeable to oil.

▲ Ball runner blocks without factory basic lubrication must be lubricated before commissioning.

A When applying metalworking fluids at the start or after a relatively long standstill, carry out 2 to 5 lubrication pulses in succession. When the system is in operation, 3 to 4 pulses per hour are recommended, irrespective of the distance traveled. If possible, carry out lubrication in one lubricating stroke. Carry out cleaning cycles (see "Maintenance").

▲ An unfavorable selection of coolant/lubricant may lead to damage to the ball rail system. We recommend getting in touch with the manufacturer of the coolant/lubricant. Bosch Rexroth accepts no liability. Lubricant and metalworking fluids must be coordinated.

🛕 If environmental factors such as contamination, vibrations, impact loads, etc. are present, we recommend shorter lubrication intervals. Even under normal operating conditions, relubrication is required every 2 years due to grease aging.

- ▶ If your application involves more demanding environmental requirements (such as clean room, vacuum, food industry applications, increased exposure to fluids or aggressive media, extreme temperatures), please consult us. Each application must be considered on its own merits in order to chose the most appropriate lubricant. Special requirements call for special seals and wipers (see chapter "Ball runner block accessories"). Be sure to have all the information concerning your application at hand when contacting us. Pay attention to the chapter "Maintenance".
- ▶ Rexroth recommends piston distributors by SKF. These should be installed as close as possible to the lube fittings of the ball runner blocks. Long lines and small line diameters should be avoided, and the lines should be laid on an upward slant. Install the lines at a gradient.
- ▶ Refer to the chapter entitled "Ball runner block accessories" for a selection of possible lube ports (in this connection, contact the manufacturer of your lubrication system too).
- ▶ If other consumers are connected to the single-line lubrication system, the weakest link in this chain determines the lubrication cycle.

### **Notes on Dynalub**

(Approved for EU countries only; not approved outside of the EU)

A Pay attention to the assignment of the ball rail system.

Under conventional environmental conditions, this short-fibred, homogeneous grease is ideally suited for the lubrication of linear elements:

- ▶ With loads up to 50 % C
- ▶ With short-stroke applications > 1 mm
- ▶ For the permissible travel speed range of ball rail systems

The product and safety data sheets can be found on our website at: <a href="www.boschrexroth.com">www.boschrexroth.com</a>.

### Dynalub 510 Grease lubricant

### Features:

- ► Lithium-based, high-performance grease of NLGI grade 2 according to DIN 51818 (KP2K-20 according to DIN 51825)
- ▶ Good water resistance
- ► Corrosion protection
- ► Temperature range: -20 to +80 °C

Material numbers for Dynalub 510:

- ► R3416 037 00 (cartridge 400 g)
- ► R3416 035 00 (hobbock 25 kg)

### **Alternative greases:**

► Castrol Tribol GR 100-2 PD\*) or Elkalub GLS 135/N2\*).

### Dynalub 520 Liquid grease

### Features:

- ► Lithium-based, high-performance grease of NLGI grade 00 according to DIN 51818 (GP00K-20 according to DIN 51826)
- ▶ Good water resistance
- ► Corrosion protection
- ► Temperature range: -20 to +80 °C

Material numbers for Dynalub 520:

- ► R3416 043 00 (cartridge 400 g)
- ► R3416 042 00 (bucket 5 kg)

### **Alternative greases:**

► Castrol Tribol GR 100-00 PD\*) or Elkalub GLS 135/N00\*)

### Notes on lubricant oil

We recommend **Shell Tonna S3 M 220** \*) or similar products with the following properties:

- ▶ Special demulsifying oil CLP or CGLP as per DIN 51517-3 for machine bed tracks and tool guides
- ► A blend of highly refined mineral oils and additives. Can be used even when mixed with significant quantities of metalworking fluids
- \*) No liability is accepted for changes to the product properties of these lubricants.

### Grease lubrication with grease guns or progressive lubrication systems

A Observe chapter "Note on lubrication"

Grease lubricant: We recommend using Dynalub 510. For further information, please refer to chapter "Note on Jubrication".

A Never put ball runner blocks into operation without basic lubrication. No initial lubrication is required if pre-lubricated at the factory. Rexroth ball rail systems are supplied with preservation.

### Initial lubrication of the ball runner blocks (basic lubrication)

### Stroke $\geq 2 \cdot \text{ball runner block length B}_1$ (normal stroke)

 One lube connection per ball runner block, attach optionally on the left or right ball guide and lubricate!

The initial lubrication is done three times with the partial quantities according to table 1:

- 1. Pre-lubricate the ball runner block with an initial partial amount according to table 1 by slowly applying pressure to the grease gun.
- 2. Move ball runner blocks with three double strokes of 3 · ball runner block length B<sub>1</sub>.
- 3. Repeat steps 1 and 2 twice.
- 4. Check whether a film of grease is visible on the ball guide rail.

Size	Initial lubrication (normal stroke) Part numbers (not exhaustive)						
	(no initial lu	brication)	(with initial lubrication)				
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z		
	R16 11	R20 05	R16 21	R20 31	R16 71		
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y		
		R20 07	R16 23	R20 33	R16 73		
				R20 90			
	Partia	l quantity (cm <sup>3</sup> )					
15	0.4 (3x)						
20		0.7 (3x)					
25		1.4 (3x)	Initial lubrication in the factory with				
30		2.2 (3x)	Dynalub 510				
35		2.2 (3x)					
45		_					
55	9.4 (3x)						
65		15.4 (3x)	<b>「</b>				
20/40			Initial lubrication in the factory with				
25/70	1	_	Dynalub 510				
35/90		2.7 (3x)		_			

Table 1

### Stroke < 2 · ball runner block length B<sub>1</sub> (short stroke)

► Two lube connections per ball runner block, attach one connection on the left and right ball guide and lubricate!

The initial lubrication is done three times for each connection with the partial quantities according to table 2:

- 1. Lubricate the ball runner block for each connection with an initial partial quantity according to table 2 by slowly applying pressure to the grease gun.
- 2. Move ball runner blocks with three double strokes of 3 · ball runner block length B<sub>1</sub>.
- 3. Repeat steps 1 and 2 twice.
- 4. Check whether a film of grease is visible on the ball guide rail.

Size	Initial lubric	ation (short str	oke)		
	Part numbe	rs (not exhausti	ve)		
	(no initial lu	brication)	(with initial lub	rication)	
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z
	R16 11	R20 05	R16 21	R20 31	R16 71
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y
		R20 07	R16 23	R20 33	R16 73
				R20 90	
	left	right			
15	0.4 (3x)	0.4 (3x)			
20	0.7 (3x)	0.7 (3x)			
25	1.4 (3x)	1.4 (3x)	Initial lub	rication in the fa	ctory with
30	2.2 (3x)	2.2 (3x)		Dynalub 510	
35	2.2 (3x)	2.2 (3x)			
45		_			
55	9.4 (3x)	9.4 (3x)			
65	15.4 (3x)	15.4 (3x)			
20/40			Initial lubrication in the factory with		ctory with
25/70		_	Dynalub 510		
35/90	2.7 (3x)	2.7 (3x)		_	

Table 2

### Grease lubrication with grease guns or progressive lubrication systems (continued)

### Relubrication of the ball runner blocks

## Stroke $\geq 2 \cdot \text{ball runner block length B}_1$ (normal stroke)

► Wenn das Relubrication interval In accordance with Diagram 1 or 2 🖛 216 erreicht ist, die Nachschmiermenge in accordance with Table 3 einbringen.

Size	Relubrication	Relubrication (normal stroke)						
	Part numbe	ers (not exhausti	ive)					
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z			
	R16 11	R20 05	R16 21	R20 31	R16 71			
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y			
		R20 07	R16 23	R20 33	R16 73			
				R20 90				
	Partial	quantity (cm <sup>3</sup> )		Partia	quantity (cm <sup>3</sup> )			
15	0.4 (1x)				0.4 (2x)			
20	0.7 (1x)		0.7 (2x)					
25		1.4 (1x)	1.4 (2x)					
30		2.2 (1x)			2.2 (2x)			
35		2.2 (1x)			2.2 (2x)			
45		_			4.7 (2x)			
55	9.4 (1x)							
65	15.4 (1x)			_				
20/40					1.0 (2x)			
25/70		_			1.4 (2x)			
35/90		2.7 (1x)		-				

Table 3

## Stroke $< 2 \cdot \text{ball runner block length B}_1$ (short stroke)

- ▶ When the relubrication interval in accordance with diagram 1 or 2 ☞ 216 is reached, apply the relubrication quantity according to table 3.
- For each lubrication cycle, the ball runner block should be moved with a double stroke of 3 ball runner block length B₁; as minimum stroke, however, ball runner block length B₁ should be moved.

Size	Dolubriosti	on (short stroke)				
3126	1	` ,				
	!	rs (not exhaustiv	. *			
	R16 10	R20 04/0Z	R16 20/2Z	R20	. 30/3Z	R16 70/7Z
	R16 11	R20 05	R16 21	R20	. 31	R16 71
	R16 60	R20 06/0Y	R16 22/2Y	R20	32/3Y	R16 72/7Y
		R20 07	R16 23	R20	. 33	R16 73
				R20	90	
	Par	l tial quantity per	Partia			onnection (cm <sup>3</sup> )
	1	onnection (cm <sup>3</sup> )	l ui tiu	quantit	y per ce	inconon (em )
	left	right		left		right
15	0.4 (1x)	0.4 (1x)		0.4 (2x)		0.4 (2x)
20	0.7 (1x)	0.7 (1x)		0.7 (2x)		0.7 (2x)
25	1.4 (1x)	1.4 (1x)		1.4 (2x)		1.4 (2x)
30	2.2 (1x)	2.2 (1x)	;	2.2 (2x)		2.2 (2x)
35	2.2 (1x)	2.2 (1x)		2.2 (2x)		2.2 (2x)
45		_		4.7 (2x)		4.7 (2x)
55	9.4 (1x)	9.4 (1x)				
65	15.4 (1x)	15.4 (1x)		-	-	
20/40				1.0 (2x)		1.0 (2x)
25/70	1	_		1.4 (2x)		1.4 (2x)
35/90	2.7 (1x)	2.7 (1x)		-	-	

Table 4


### Grease lubrication with grease guns or progressive lubrication systems (continued)

## Load-dependent relubrication intervals This applies to the following conditions:

- ► dynalub 510 grease or Castrol Tribol GR 100-2 PD or Elkalube GLS 135/N2
- ▶ no media pressurization
- standard seals (SS)
- ▶ ambient temperature:

 $T = 10 - 40 \, ^{\circ}C$ 





 $F_m/C$  = Load ratio (-)

s = Relubrication interval as travel distance (km)

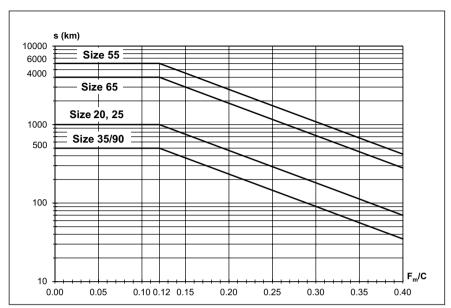


Diagram 1

Material number		
R16 10	R16 11	R16 60

## For relubrication intervals, please consult us:

- ▶ in case of exposure to cooling lubricants
- in case of exposure to dust (wood, paper,...)
- with use of a double-lip seal (DS)
- with standard seal (SS) in combination with front seal or FKM seal or seal kit
- $\blacktriangleright$  at low mean travel speed  $v_m$
- ▶ at a raised ambient temperature
- at high loads F<sub>m</sub>/C > 0.4

▲ Pay attention to the notes on lubrication!

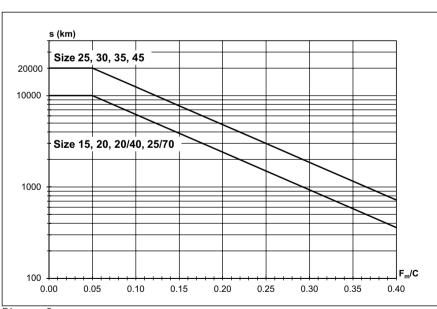


Diagram 2

Material number							
R20 04	R16 20	R20 30	R16 70	R20 90			
R20 05	R16 21	R20 31	R16 71				
R20 06	R16 22	R20 32	R16 72				
R20 07	R16 23	R20 33	R16 73				

### Liquid grease lubrication with single-line piston distributor systems

⚠ Observe chapter "Note on lubrication"

Grease lubricant: We recommend using **Dynalub 520.** For further information, please refer to chapter "Note on lubrication".

A Never put ball runner blocks into operation without basic lubrication. No initial lubrication is required if pre-lubricated at the factory. Rexroth ball rail systems are supplied with preservation.

### Initial lubrication of the ball runner blocks (basic lubrication)

### Stroke ≥ 2 · ball runner block length B<sub>1</sub> (normal stroke)

▶ One lube connection per ball runner block, attach optionally on the left or right ball guide and lubricate!

The initial lubrication is done three times with the partial quantities according to table 5:

- 1. Lubricate the ball runner block with an initial partial amount according to table 5 by slowly applying pressure to the grease gun.
- 2. Move ball runner blocks with three double strokes of 3 · ball runner block length B<sub>1</sub>.
- 3. Repeat steps 1 and 2 twice.
- 4. Check whether a film of grease is visible on the ball guide rail.

Size	Initial lubric	cation (normal s	troke)			
	Part numbe	rs (not exhausti	ve)			
	(no initial lubrication) (with initial lubrication)					
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z	
	R16 11	R20 05	R16 21	R20 31	R16 71	
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y	
		R20 07	R16 23	R20 33	R16 73	
				R20 90		
	Partial	quantity (cm <sup>3</sup> )				
15	0.4 (3x)			`		
20		0.7 (3x)				
25		1.4 (3x)	Initial lubrication in the factory with			
30		2.2 (3x)	Dynalub 510			
35		2.2 (3x)				
45		-				
55		9.4 (3x)				
65		15.4 (3x)				
20/40			Initial lubrication in the factory with			
25/70	1	_	Dynalub 510			
35/90		2.7 (3x)		_		

Table 5

### Stroke < 2 · ball runner block length B<sub>1</sub> (short stroke)

► Two lube connections per ball runner block, attach one connection on the left and right ball guide and lubricate!

The initial lubrication is done three times for each connection with the partial quantities according to table 6:

- 1. Lubricate the ball runner block for each connection with an initial partial quantity according to table 6 by slowly applying pressure to the grease gun.
- 2. Move ball runner blocks with three double strokes of 3 · ball runner block length B<sub>1</sub>.
- 3. Repeat steps 1 and 2 twice.
- 4. Check whether a film of grease is visible on the ball guide rail.

Size	ze Initial lubrication (short stroke)						
2.20	I	Part numbers (not exhaustive)					
	(no initial lu	•	(with initial lub	rication)			
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z		
	R16 11	R20 05	R16 21	R20 31	R16 71		
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y		
		R20 07	R16 23	R20 33	R16 73		
				R20 90			
	Part	tial quantity per	quantity per				
		onnection (cm <sup>3</sup> )					
	left	right					
15	0.4 (3x)	0.4 (3x)					
20	0.7 (3x)	0.7 (3x)					
25	1.4 (3x)	1.4 (3x)	Initial lub	rication in the fa	ctory with		
30	2.2 (3x)	2.2 (3x)		Dynalub 510			
35	2.2 (3x)	2.2 (3x)					
45		_	1				
55	9.4 (3x)	9.4 (3x)					
65	15.4 (3x)	15.4 (3x)	_				
20/40			Initial lubrication in the factory with				
25/70		_	Dynalub 510				
35/90	2.7 (3x)	2.7 (3x)		_			

Table 6

### Liquid grease lubrication with single-line piston distributor systems (continued)

### Relubrication of the ball runner blocks

### Stroke $\geq 2 \cdot \text{ball runner block length B}_1$ (normal stroke)

▶ If the relubrication interval according to diagram 3 or 4 has been reached, relubricate the amount stated in table 7.

#### Note

The number of pulses required for this purpose is the integer quotient of the minimum relubrication amount as per table 7 and the smallest permissible piston according to table 9.

The smallest permissible piston distributor size also depends on the installation position.

The lubricating cycle time is the result of dividing the lubrication interval by the determined pulse count (see dimensioning example).

Size	Relubrication	on (normal strok	(e)		
	Part numbe	ers (not exhausti	ive)		
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z
	R16 11	R20 05	R16 21	R20 31	R16 71
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y
		R20 07	R16 23	R20 33	R16 73
				R20 90	
	Partial	quantity (cm <sup>3</sup> )		Partia	quantity (cm <sup>3</sup> )
15		0.4 (1x)			0.4 (2x)
20		0.7 (1x)	0.7 (2x)		
25		1.4 (1x)			1.4 (2x)
30		2.2 (1x)			2.2 (2x)
35		2.2 (1x)			2.2 (2x)
45		-			4.7 (2x)
55		9.4 (1x)			
65		15.4 (1x)		_	
20/40					1.0 (2x)
25/70		_			1.4 (2x)
35/90		2.7 (1x)		_	

Table 7

### Stroke < 2 · ball runner block length B<sub>1</sub> (short stroke)

- ▶ When the relubrication interval according to diagram 3 or 4 is reached, apply the relubrication quantity according to table 8 per lube connection.
- ▶ The number of pulses required and the lubrication cycle are to be determined in a similar way as the relubrication (normal stroke).
- ► For each lubrication cycle, the ball runner block should be moved with a double stroke of 3 ball runner block length B<sub>1</sub>; as minimum stroke, however, ball runner block length B<sub>1</sub> should be moved.

A Pay attention to the notes on lubrication!

Size	Relubrication	on (short stroke)	)		
	Part numbe	rs (not exhausti	ve)		
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z
	R16 11	R20 05	R16 21	R20 31	R16 71
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y
		R20 07	R16 23	R20 33	R16 73
				R20 90	
	Part	ial quantity per	Partial quantity per connection (cm		
		pnnection (cm <sup>3</sup> )			
	left	right		left	right
15	0.4 (1x)	0.4 (1x)		0.4 (2x)	0.4 (2x)
20	0.7 (1x)	0.7 (1x)		0.7 (2x)	0.7 (2x)
25	1.4 (1x)	1.4 (1x)		1.4 (2x)	1.4 (2x)
30	2.2 (1x)	2.2 (1x)		2.2 (2x)	2.2 (2x)
35	2.2 (1x)	2.2 (1x)		2.2 (2x)	2.2 (2x)
45		_		4.7 (2x)	4.7 (2x)
55	9.4 (1x)	9.4 (1x)			
65	15.4 (1x)	15.4 (1x)			
20/40				1.0 (2x)	1.0 (2x)
25/70		_		1.4 (2x)	1.4 (2x)
35/90	2.7 (1x)	2.7 (1x)		_	

Table 8

### Liquid grease lubrication with single-line piston distributor systems (continued)

## Load-dependent relubrication intervals This applies to the following conditions:

- ► liquid grease Dynalub 520 alternatively Castrol Tribol GR 100-00 PD or Elkalube GLS 135/N00
- ▶ no media pressurization
- standard seals (SS)
- ▶ ambient temperature:

 $T = 10 - 40 \, ^{\circ}C$ 



C = Dynamic load capacity (N)  $F_m$  = Dynamically equivalent

Load on bearing (N)

 $F_m/C$  = Load ratio (-)

s = Relubrication interval as travel distance (km)

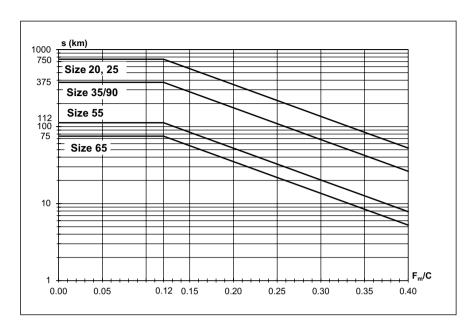


Diagram 3

Material number		
R16 10	R16 11	R16 60

## For relubrication intervals, please consult us:

- ▶ in case of exposure to cooling lubricants
- in case of exposure to dust (wood, paper,...)
- ▶ with use of a double-lip seal (DS)
- with standard seal (SS) in combination with front seal or FKM seal or seal kit
- $\blacktriangleright$  at low mean travel speed  $v_m$
- at a raised ambient temperature
- ▶ at high loads F<sub>m</sub>/C > 0.4

▲ Pay attention to the notes on lubrication!



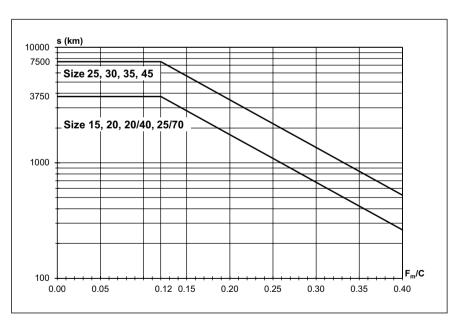



Diagram 4


Material number	er			
R20 04	R16 20	R20 30	R16 70	R20 90
R20 05	R16 21	R20 31	R16 71	
R20 06	R16 22	R20 32	R16 72	
R20 07	R16 23	R20 33	R16 73	


### Liquid grease lubrication with single-line piston distributor systems (continued)














### Smallest permissible piston distributor size for liquid grease lubrication via single-line piston distributor<sup>1)</sup>

Ball runner blocks			(≙ mi	lest pe inimun ach co	n impu	lse qu	antity)				LGI grad	le 00			
					Size										
Material nun	nber			Installation	15	20	25	30	35	45	55	65	20/40	25/70	35/90
				positions											
R16 10				Horizontal I, IV											
R16 11				Vertical II, V	] -	0.30	0.30	-	_	-	0.30	0.30	_	-	0.30
R16 60				Wall mounting	1										
				III, VI											
R20 04						0.03	0.03	0.06	0.10	0.10			0.03	0.03	
R20 0Z				vertical ii, v		0.03	0.03	0.06	0.10	0.10			0.03	0.03	
R20 05					]										
R20 06				Wall mounting	0.03						_	_			_
R20 0Y				III VI		0.06	0.06	0.10	0.20	0.20			0.06	0.06	
R20 07	R16 23	R20 33	R16 73	, •.											
		R20 90													

#### Table 9

- 1) This applies to the following conditions:
  - Liquid grease Dynalub 520 (alternatively Castrol Tribol GR 100-00 PD or Elkalube GLS 135/N00) and piston distributors by SKF.
  - Lubrication channels must be filled
  - Ambient temperature T = 10 40 °C

### Oil lubrication with single-line piston distributor systems

A Observe chapter "Note on Jubrication"

Lubricant oil: We recommend Shell Tonna S3 M220. For further information, please refer to chapter "Note on lubrication".

A Never put ball runner blocks into operation without basic lubrication. No initial lubrication is required if pre-lubricated at the factory. Rexroth ball rail systems are supplied with preservation.

### Initial lubrication of the ball runner blocks (basic lubrication)

### Stroke ≥ 2 · ball runner block length B<sub>1</sub> (normal stroke)

▶ One lube connection per ball runner block, attach optionally on the left or right ball guide and lubricate!

The initial lubrication is done two times with the partial quantity according to table 10:

- 1. Oil the ball runner block with the initial partial quantity according to table 10.
- 2. Move ball runner blocks with three double strokes of 3 · ball runner block length B<sub>1</sub>.
- 3. Repeat steps 1 and 2 once.
- 4. Check whether a film of grease is visible on the ball guide rail.

Size	Initial lubric	ation (normal s	troke)								
	Part numbe	Part numbers (not exhaustive)									
	(no initial lu	brication)	(with initial lub	(with initial lubrication)							
	R16 10	R20 04/0Z	R16 20/2Z	/2Z   R20 30/3Z   R16 70							
	R16 11	R20 05	R16 21	R20 31	R16 71						
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y						
		R20 07	R16 23	R20 33	R16 73						
				R20 90							
	Parti	al quantity (cm <sup>3</sup> )									
15		0.4 (2x)		•							
20		0.7 (2x)	1								
25		1.0 (2x)	Initial lubrication in the factory with								
30		1.1 (2x)	Dynalub 510								
35		1.2 (2x)									
45		_									
55		3.6 (2x)									
65		6.0 (2x)		_							
20/40			Initial lubrication in the factory with								
25/70	1	_	Dynalub 510								
35/90		1.8 (2x)		_							

Table 10

### Stroke < 2 · ball runner block length B<sub>1</sub> (short stroke)

► Two lube connections per ball runner block, attach one connection on the left and right ball guide and lubricate!

The initial lubrication is done two times for each connection with the partial quantities according to table 11:

- 1. Oil the ball runner block for each connection with the initial partial quantity according to table 11.
- 2. Move ball runner blocks with three double strokes of 3 · ball runner block length B<sub>1</sub>.
- 3. Repeat steps 1 and 2 once.
- 4. Check whether a film of grease is visible on the ball guide rail.

Size	Initial lubric	Initial lubrication (short stroke)								
	Part numbe	rs (not exhausti	ve)							
	(no initial lu	brication)	(with initial lubrication)							
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z					
	R16 11	R20 05	R16 21	R20 31	R16 71					
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y					
		R20 07	R16 23	R20 33	R16 73					
				R20 90						
	Partial quant	* *								
	connection (d									
	left	right								
15	0.4 (2x)	0.4 (2x)								
20	0.7 (2x)	0.7 (2x)								
25	1.0 (2x)	1.0 (2x)	Initial lub	rication in the fa	ctory with					
30	1.1 (2x)	1.1 (2x)		Dynalub 510						
35	1.2 (2x)	1.2 (2x)								
45		_								
55	3.6 (2x)	3.6 (2x)								
65	6.0 (2x)	6.0 (2x)								
20/40			Initial lubrication in the factory with							
25/70	]	_		Dynalub 510						
35/90	1.8 (2x)	1.8 (2x)	-							

Table 11

### Oil lubrication with single-line piston distributor systems (continued)

### Relubrication of the ball runner blocks

### Stroke $\geq 2 \cdot \text{ball runner block length B}_1$ (normal stroke)

▶ If the relubrication interval according to diagram 5 or 6 has been reached, relubricate the amount stated in table 12.

### Note

The required number of pulses is the integral quotient of the minimum relubrication quantity as per table 12 and the smallest permissible piston distributor according to table 14.

The smallest permissible piston distributor size also depends on the installation position. The lubricating cycle time is the result of dividing the lubrication interval by the determined number of pulses (see dimensioning example).

Size	Relubrication	on (normal strok	e)					
	Part numbe	rs (not exhausti	ve)					
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/3Z	R16 70/7Z			
	R16 11	R20 05	R16 21	R20 31	R16 71			
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y			
		R20 07	R16 23	R20 33	R16 73			
				R20 90				
	Partia	quantity (cm <sup>3</sup> )	Partial quantity (cm					
15		0.4 (1x)			0.4 (1x)			
20		0.7 (1x)		0.7 (1x)				
25		1.0 (1x)			1.0 (1x)			
30		1.1 (1x)			1.1 (1x)			
35		1.2 (1x)			1.2 (1x)			
45		_			2.2 (1x)			
55		3.6 (1x)						
65		6.0 (1x)		_				
20/40					0.7 (1x)			
25/70	1	_			1.1 (1x)			
35/90		1.8 (1x)		_				

Table 12

### Stroke < 2 · ball runner block length B<sub>1</sub> (short stroke)

- When the relubrication interval according to diagram 5 or 6 is reached, apply the relubrication quantity according to table 13 per lube connection.
- ▶ The number of pulses required and the lubrication cycle are to be determined in a similar way as the relubrication (normal stroke).
- ► For each lubrication cycle, the ball runner block should be moved with a double stroke of 3 ball runner block length B<sub>1</sub>; as minimum stroke, however, ball runner block length B<sub>1</sub> should be moved.

A Pay attention to the notes on lubrication!

Size	Relubrication	on (short stroke)			
	Part numbe	rs (not exhausti	ve)		
	R16 10	R20 04/0Z	R16 20/2Z	R20 30/32	R16 70/7Z
	R16 11	R20 05	R16 21	R20 31	R16 71
	R16 60	R20 06/0Y	R16 22/2Y	R20 32/3Y	R16 72/7Y
		R20 07	R16 23	R20 33	R16 73
				R20 90	
	Pa	rtial quantity per	Par	tial quantity per	connection (cm <sup>3</sup> )
		connection (cm³)			
	left	right		left	right
15	0.4 (1x)	0.4 (1x)		0.4 (1x)	0.4 (1x)
20	0.7 (1x)	0.7 (1x)		0.7 (1x)	0.7 (1x)
25	1.0 (1x)	1.0 (1x)		1.0 (1x)	1.0 (1x)
30	1.1 (1x)	1.1 (1x)		1.1 (1x)	1.1 (1x)
35	1.2 (1x)	1.2 (1x)		1.2 (1x)	1.2 (1x)
45		_		2.2 (1x)	2.2 (1x)
55	3.6 (1x)	3.6 (1x)		_	
65	6.0 (1x)	6.0 (1x)			
20/40				0.7 (1x)	0.7 (1x)
25/70	1	_		1.1 (1x)	1.1 (1x)
35/90	1.8 (1x)	1.8 (1x)		_	

Table 13

### Oil lubrication with single-line piston distributor systems (continued)

### Load-dependent relubrication intervals for oil lubrication via single-line piston distributor systems ("dry axes")



- ▶ lubricant oil Shell Tonna S3 M220
- no media pressurization
- standard seals (SS)
- ▶ ambient temperature:

$$T = 10 - 40 \, ^{\circ}C$$

### Key

C = Dynamic load capacity (N)  $F_m$  = Dynamically equivalent

Load on bearing (N)

 $F_m/C$  = load ratio (-)

s = Relubrication interval

as travel distance (km)

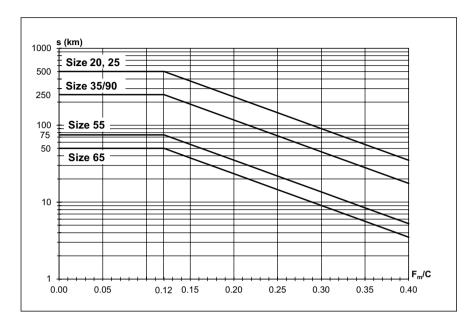



Diagram 5

Material number		
R16 10	R16 11	R16 60

## For relubrication intervals, please consult us:

- ▶ in case of exposure to cooling lubricants
- in case of exposure to dust (wood, paper,...)
- ▶ with use of a double-lip seal (DS)
- with standard seal (SS) in combination with front seal or FKM seal or seal kit
- ▶ at low mean travel speed v<sub>m</sub>
- at a raised ambient temperature
- ▶ at high loads F<sub>m</sub>/C > 0.4





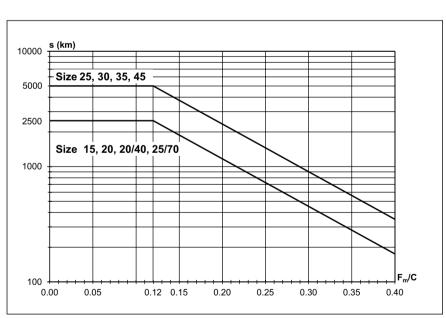



Diagram 6


Material number	•			
R20 04	R16 20	R20 30	R16 70	R20 90
R20 05	R16 21	R20 31	R16 71	
R20 06	R16 22	R20 32	R16 72	
R20 07	R16 23	R20 33	R16 73	


### Oil lubrication with single-line piston distributor systems (continued)














### Smallest permissible piston distributor size for oil lubrication via single-line piston distributor1)

Ball runner blo	er blocks			(≠ mi	nimum	impul	se qua	ntity)				0 mm ²/s	5		
					Size										
Material numb	oer			Installation	15	20	25	30	35	45	55	65	20/40	25/70	35/90
				positions											
R16 10				Horizontal I, IV											
R16 11				Vertical II, V	-	0.0	60		_		1.	50	-	-	0.60
R16 60				Wall mounting	]										
				III, VI											
R20 04 R1	16 20	R20 30	R16 70	Horizontal I, IV		0.00	0.03	200	0.10	0.10			0.00	0.00	
R20 0Z R1	16 2Z	R20 3Z	R16 7Z	Vertical II, V	1	0.03	0.03	0.06	0.10	0.10			0.03	0.03	
R20 05 R1	16 21	R20 31	R16 71	,	1										
R20 06 R1	16 22	R20 32	R16 72	Wall mounting	0.03						_	_			_
R20 0Y R1	16 2Y	R20 3Y	R16 7Y	_		0.06	0.06	0.10	0.16	0.16			0.06	0.06	
R20 07 R1	16 23	R20 33	R16 73	III, VI											
		R20 90													

Table 14

- 1) This applies to the following conditions:
  - Lubricant oil Shell Tonna S3 M 220 and piston distributor from SKF
  - Lubrication channels must be filled
  - Ambient temperature T = 10 40 °C

### Dimensioning example of lubrication a typical 2-axes application using central lubrication X-axis

Component or characteristic value	Specifications			
Ball runner blocks	Size 35, 4 pieces, C = 51,800 N, part numbers: R1651 323 20			
Ball guide rail	Size 35, 2 pieces, L = 1,500 mm; part numbers: R1605 333 61			
Dynamic equivalent load on bearing	F <sub>m</sub> = 12,570 N (per ball runner block) with consideration of the preload (here C2)			
Stroke	500 mm			
Average linear speed	v <sub>m</sub> = 1 m/s			
Temperature	20 – 30 °C			
Installation position	Horizontal			
Lubrication	Single-line distributor system for all axes with liquid grease Dynalub 520			
Exposure to contaminants	No exposure to media, chips, dust			

<b>Dimensioning sizes</b> 1. Normal stroke or short stroke?	Dimensioning (for each ball runner block)  Normal stroke:  Stroke $\geq 2 \cdot$ ball runner block length B <sub>1</sub> 500 mm $\geq 2 \cdot 77$ mm  500 mm $\geq 154$ mm!  i.e. normal stroke applies!	<ul> <li>Sources of information</li> <li>Normal-stroke formula,</li> <li>Ball runner block length B₁</li> </ul>
2. Initial lubrication amount	1 lube connection, initial lubrication quantity: pre-lubricated at the factory with Dynalub 510	▶ Initial lubrication amount from table 5
3. Relubrication quantity	1 lube connection, relubrication quantity: 2.2 cm <sup>3</sup> (2x)	► Relubrication amount from table 7
4. Installation position	Installation position I – Normal stroke (horizontal)	► Installation position from overview
5. Piston distributor size	Permissible piston distributor size: 0.1 cm <sup>3</sup>	<ul> <li>Piston distributor size from table 9</li> <li>Size 35, installation position I (horizontal)</li> </ul>
6. Number of pulses	Number of pulses = $\frac{2 \cdot 2.2 \text{ cm}^3}{0.1 \text{ cm}^3} = 44$	Number of pulses = Number · relubrication quantity Permissible Piston distributor size
7. Load ratio	Load ratio = $\frac{12,570 \text{ N}}{51,800 \text{ N}} = 0.24$	► Load ratio = F <sub>m</sub> /C F <sub>m</sub> and C from specifications
8. Relubrication interval	Relubrication interval: 2,150 km	► Relubrication interval from diagram 4: Curve size 35 with load ratio of 0.24
9. Lubrication cycle	Lubrication cycle = $\frac{2,150 \text{ km}}{44}$ = 48	► Lubrication cycle = $\frac{\text{Relubrication interval}}{\text{Number of pulses}}$
Interim result (X-axis)	For the x-axis, for each ball runner block, a minimum quantity of 0.1 cm <sup>3</sup> of Dynalub	

520 is to be supplied every 48 km.

#### Y-axis

Component or characteristic value	Specifications	
Ball runner blocks	Size 25, 4 pieces, C = 28,600 N, part numbers: R1651 223 20	
Ball guide rail	Size 25; 2 pieces; L = 1 000 mm, Material numbers: R1605 232 31	
Dynamic equivalent load on bearing	F <sub>m</sub> = 3,420 N (per ball runner block) with consideration of the preload (here C2)	
Stroke	50 mm (short stroke)	
Average linear speed	v <sub>m</sub> = 1 m/s	
Temperature	20 – 30 °C	
Installation position	Vertical	
Lubrication	Single-line distributor system for all axes with liquid grease Dynalub 520	
Exposure to contaminants	No exposure to media, chips, dust	

Exposure to containments	No exposure to media, emps, dust	
<b>Dimensioning sizes</b> 1. Normal stroke or short stroke?	Dimensioning (for each ball runner block)  Normal stroke:  Stroke $\geq 2 \cdot$ ball runner block length B <sub>1</sub> 50 mm $\geq 2 \cdot 57.8$ mm  50 mm $< 115.6$ mm!  i.e. short stroke applies!	Sources of information  ► Normal-stroke formula, Ball runner block length B <sub>1</sub>
2. Initial lubrication amount	2 lube connections, initial lubrication quantity for each connection: pre-lubricated at the factory with Dynalub 510	► Initial lubrication amount from table 6
3. Relubrication quantity	2 lube connections, relubrication quantity for each connection: 1.4 cm <sup>3</sup> (2x)	► Relubrication amount from table 8
4. Installation position	Installation position V – short stroke (vertical to inclined horizontal)	► Installation position from overview
5. Piston distributor size	Permissible piston distributor size: 0.03 cm <sup>3</sup>	<ul> <li>Piston distributor size from table 9, size 25, mounting position V (vertical to inclined horizontal)</li> </ul>
6. Number of pulses	Number of pulses = $\frac{2 \cdot 1.4 \text{ cm}^3}{0.03 \text{ cm}^3} = 94$	► Number of pulses =   Number · relubrication quantity  Permissible Piston distributor size
7. Load ratio	Load ratio = $\frac{3,420 \text{ N}}{28,600 \text{ N}} = 0.12$	► Load ratio = F <sub>m</sub> /C F <sub>m</sub> and C from specifications
8. Relubrication interval	Relubrication interval: 7,500 km	► Relubrication interval from diagram 4: Curve size 25 with load ratio of 0.12
9. Lubrication cycle	Lubrication cycle = $\frac{7,500 \text{ km}}{94}$ = 80 km	► Lubrication cycle = Relubrication interval Number of pulses
Interim result (Y-axis)	For the y-axis, for each ball runner block and each lube connection, a minimum quantity of 0.03 cm <sup>3</sup> of Dynalub 520 is to be supplied every 80 km.	
Final result (Two-axes lubrication)	Since, in this example, both axes are to be supplied by a single-line distributor system, the x-axis with its smaller lubrication cycle (48 km) determines the total lubrication cycle of the	The number of connections and minimum quantities determined for each individual axis remain valid.

system, i.e. the y-axis is lubricated every 48  $\mbox{km}$ 

as well.

## Lubrication from above without lubrication adapter

For all ball runner blocks with preparation for lubrication from above.
(Exceptions: High ball runner block SNH R1621 and SLH R1624) In the groove for the O-ring, another small groove (1) is pre-fitted. Do not open this with a drill. Risk of contamination!

- 1. Heat up a metal tip (2) with a diameter of 0.8 mm.
- 2. Carefully open and pierce the groove (1) with the metal tip.


  Observe the maximum permissible depth  $T_{max}$  according to the table!
- Insert the o-ring (3) into the groove (the o-ring is not included in the scope of delivery of the ball runner block.
   Ball runner block accessories)

### with lubrication adapter


(Ball runner block accessories)
A lubrication adapter is necessary for high ball runner blocks if lubrication is to be carried out from the carriage.
In the groove for the O-ring, another small groove (1) is pre-fitted.
Do not open this with a drill.
Risk of contamination!

- 1. Heat up a metal tip (2) with a diameter of 0.8 mm.
- 2. Carefully open and pierce the groove (1) with the metal tip.

  Observe the maximum permissible depth  $T_{max}$  according to the table!
- 3. Insert the o-ring (3) into the groove (the o-ring is not included in the scope of delivery of the lubrication adapter).
- 4. Insert the lubrication adapter at a slant into the groove and press the straight side (4) against the steel part (5). Use grease to fix the adapter in place.
- 5. Insert the o-ring (6) into the lubrication adapter (the o-ring is not included in the scope of delivery of the lubrication adapter).

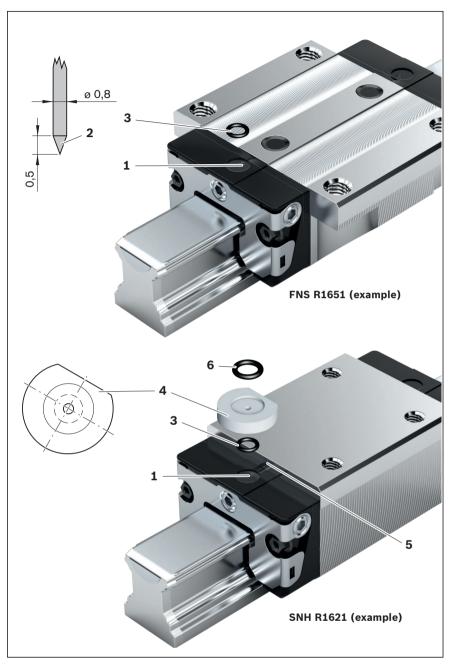

Size	Lubrication opening, top: Maximum permissible depth for piercing T <sub>max</sub> (mm)		
	Ball runner block standard	Ball runner block low	
15	height/high 3.6	_	
20	3.9	4.4	
25	3.3	4.9	
30	6.6	_	
35	7.5	-	
45	8.8	-	
20/40	4.0	-	
25/70	2.1	-	
35/90	7.9	-	



### Maintenance

### **Cleaning cycle**

Dirt can settle and encrust on ball guide rails, especially when these are not enclosed. To ensure that seals and cover strips retain their functionality, this dirt must be removed at regular intervals.

It is advisable to perform at least one full cleaning cycle over the entire stroke at least twice a day or every 8 hours at the latest.

Before shutting down the machine, always perform a cleaning cycle. Shorter maintenance intervals in case of exposure to cooling lubricants.

### **Maintenance of** accessories

All accessories used for scraping the ball guide rail shall be subject to regular maintenance.


In environments with heavy contamination, it is advisable to replace all the parts directly exposed to such contamination.

We recommend annual maintenance.

### **Bosch Rexroth Linear Motion Technology homepage**

https://www.boschrexroth.com/en/xc/products/product-groups/linear-motion-technology/index




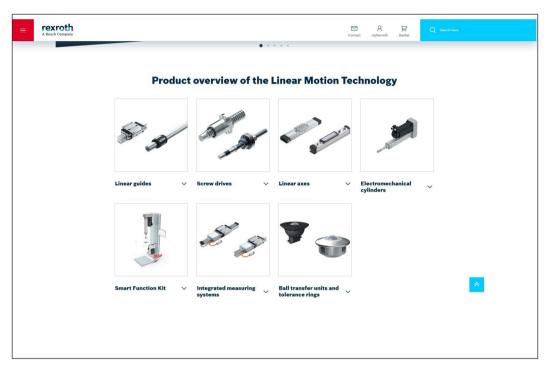

### **Configurators and tools**

https://www.boschrexroth.com/en/xc/products/engineering/econfigurators-and-tools/econfigurators




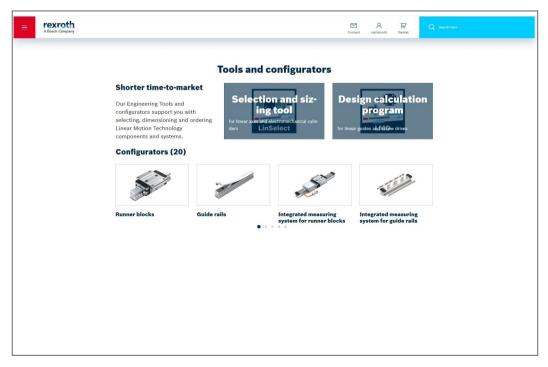

### **GoTo Europe**

http://www.boschrexroth.com/goto




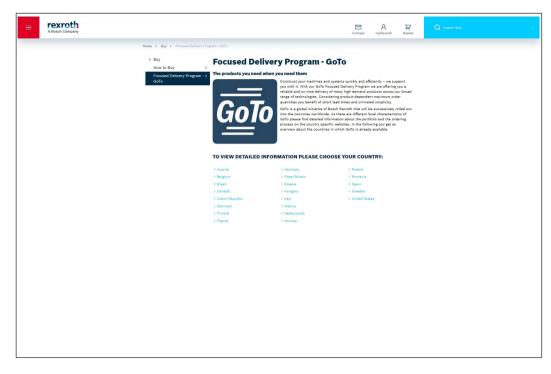

### **How-to: Linear Motion Technology**

https://www.youtube.com/playlist?list=PLRO3LeFQeLyMF6evW4E7kR93JHzpJlV4r




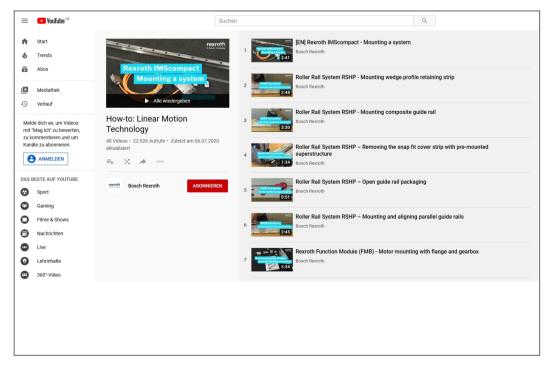

### Service

https://www.boschrexroth.com/en/xc/products/product-groups/linear-motion-technology/service-linear-motion-technology




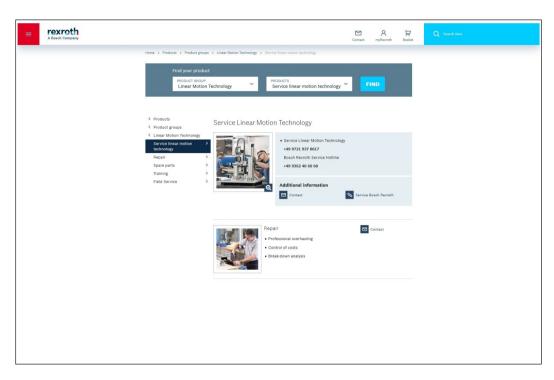

### **Training**

https://www.boschrexroth.com/en/xc/training/training



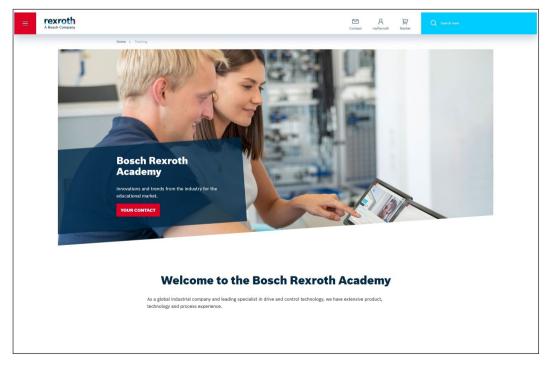



#### **Bosch Rexroth AG**

Ernst-Sachs-Straße 100 97424 Schweinfurt, Germany Tel. +49 9721 937-0 Fax +49 9721 937-275

www.boschrexroth.com

### Find your local contact person here:

www.boschrexroth.com/contact

